



PNEUMATIC SEALS

Precision seals for pneumatics

Parker-Prädifa pneumatic seals are the result of many years of compound and profile development experience, allowing the pneumatics engineer to pursue new design options and techniques such as selecting a friction-optimised sealing lip geometry which preserves the lubricating film.

A comprehensive portfolio of sealing systems for pneumatic cylinders is available to the application engineer: rod seals and wipers, single- and double-acting piston seals, complete pistons with or without mechanical dampers, cushioning rings as well as combined seal/wiper rings for ISO and short-stroke cylinders.

For special application requirements, as well, Parker offers a wide product range (partially included in this catalogue): seal/wiper elements for non-rotating cylinders, oval double-acting piston seals for flat cylinders, fleece-rubber seals for rodless cylinders and special seal/wiper elements for particularly dirty operating conditions.

In addition, Parker draws on years of experience in the field of valve sealing systems particularly spool valves thus being able to design the seal best suiting the customer's specific valve system and associated requirements.

Special compounds are available for pneumatic sealing solutions, combining the benefits of low friction, minimum wear and long service life. The variety of our compound range offers the right choice of material for any application and engineering requirement.

The Parker Seal Group's extensive range of supporting facilities and expertise, including an accredited test lab, rubber and polyurethane compound development, physical lab and finite elements analysis, provides a solid base for customer-specific product developments.

For any requirements regarding the above, please contact our application engineers, who will be happy to assist you.



Parker's safety programme

Warning - User Responsibility

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalogue and in any materials provided by Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and responsibly foreseeable uses of the components or systems.

Range of Application

Our seals may only be used within the application parameters stated in our documents as regards compatibility with contact media, pressures, temperatures and time of storage. Application or use outside of the specified application parameters as well as the selection of different compounds by mistake may result in damage to life, the environment and/or equipment and facilities.

The information contained in our publications is based on know-how developed over decades of experience in the manufacturing and application of seals. Despite this experience, unknown factors arising out of the practical application of seals may considerably affect the overall applicability of this information in such a way that the recommendations provided herein are not to be considered generally binding.

The data for operating pressure, operating temperature, and surface speed stated in the columns represent maximum values and are interrelated. Under extreme working conditions it is recommended not to use all maximum values simultaneously.

For special requirements (pressure, temperature, speed, etc.) please contact our consultancy service, so that suitable materials and/or designs can be recommended.

Compatibility of Seals and Operating Media / Cleaning Agents

Due to the great diversity of operational parameters affecting fluidic devices and their impact on seals, it is absolutely imperative that manufacturers of these devices approve seals for functional and operational suitability under field conditions.

Furthermore, in view of the consistent increase of newly available media used as hydraulic oils, lubricants, and cleaning agents, special attention is invited to the aspect of compatibility with sealing elastomers currently in use.

Additives contained in base media in order to enhance certain functional characteristics may affect compatibility characteristics of sealing materials.

For this reason, it is imperative that any product equipped with our seals be tested for compatibility with operational media or cleaning agents approved or specified by you either at your plant or by means of field tests prior to any field use.

We kindly ask you to comply with this notice since, as a manufacturer of seals, we are not in a position, as a matter of principle, to perform simulations of any and all conditions present in the final application nor of knowing the composition of the operational media and cleaning agents used.

Design Modifications

We reserve the right to make design modifications without prior notification.

Prototypes and Samples

Prototypes and samples are produced from experimental moulds. The subsequent series production may differ in terms of production techniques from the prototype production unless specific agreement to the contrary was reached beforehand.

Delivery and Services

The delivery guarantee (availability of moulds) for individual dimensions of our range of products is limited to a period of 7 years.

Damaged moulds, including standard items, can only be replaced in case of sufficient demand. Most of the dimensions stated in this catalogue are normally (but not as a matter of course) available ex stock.

For the production of smaller quantities, special compounds, and in case of special production procedures, we reserve the right of charging a prorated share of set-up costs.

All deliveries and services are subject to our terms.

Quality Systems

Our manufacturing sites are certified according to ISO 9001 and/or IAT16949 and/or EN9100.

Copyright

All rights reserved by Parker Hannifin Corporation. Extracts may only be taken with permission. Modification rights reserved.

Validity

This edition supersedes all prior documents.


Contents

Contents	
General information	6
Sealing systems in typical applications	6
Sealing compounds for fluid technology	8
General installation guidelines for piston seals	18
General installation guidelines for rod seals	21
Maximum gap allowance	23
Rod seals	27
Rod seals with wiper	38
Rod seals with wiper for anti-rotation pneumatic cylinders	54
Rod seals with wiper and guiding element	58
Piston seals	61
Piston seals, single-acting	62
Piston seals, double-acting	77
Complete pistons, single-acting	85
Complete pistons, double-acting	89
Other seal products	97
Wipers	98
Cushioning seals	100
Guiding elements	106
O-rings	111





Sealing systems in typical applications

Pneumatics

Cylinder

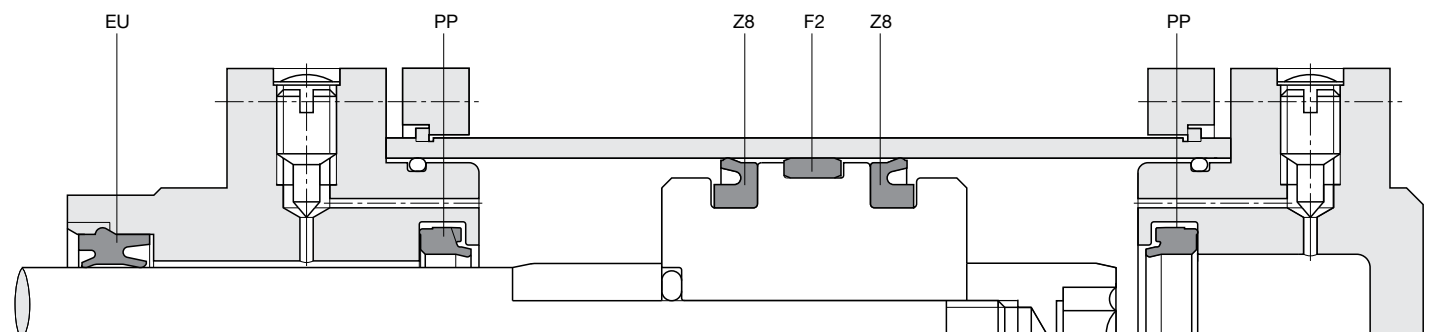


Short-stroke cylinder

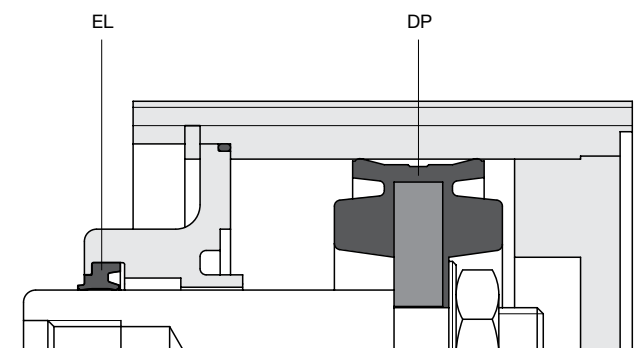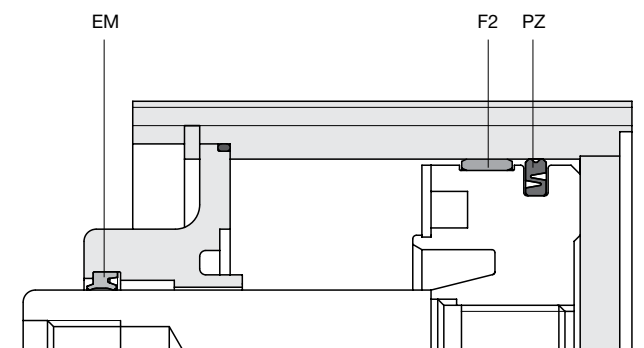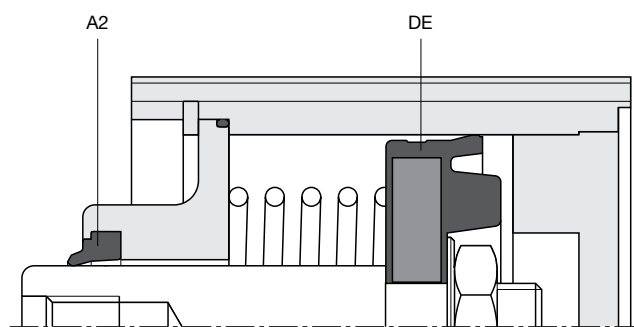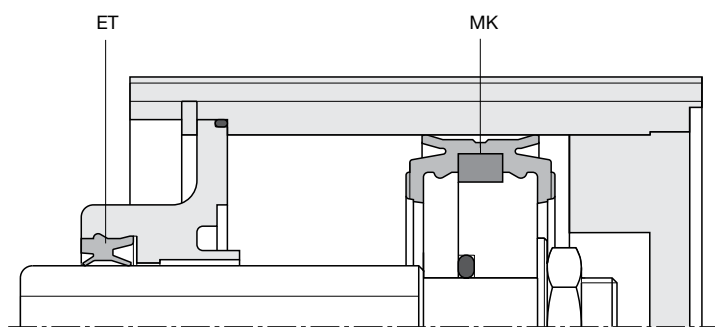


Sealing systems in typical applications

Spool valve

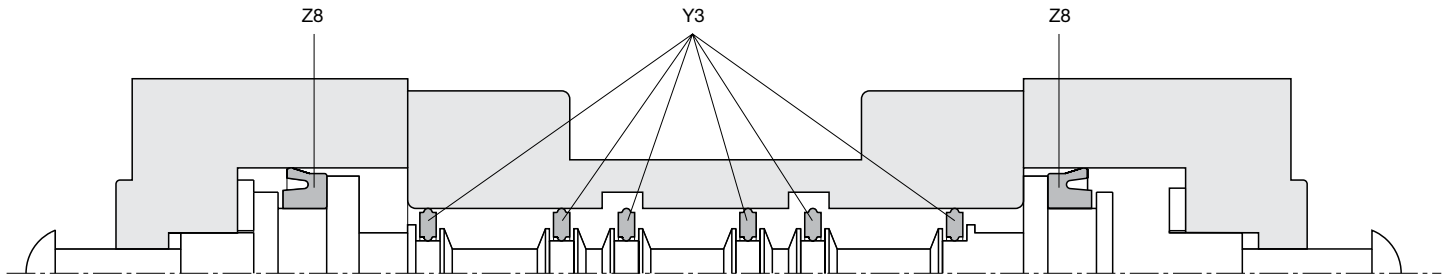

Pilote poppet valve

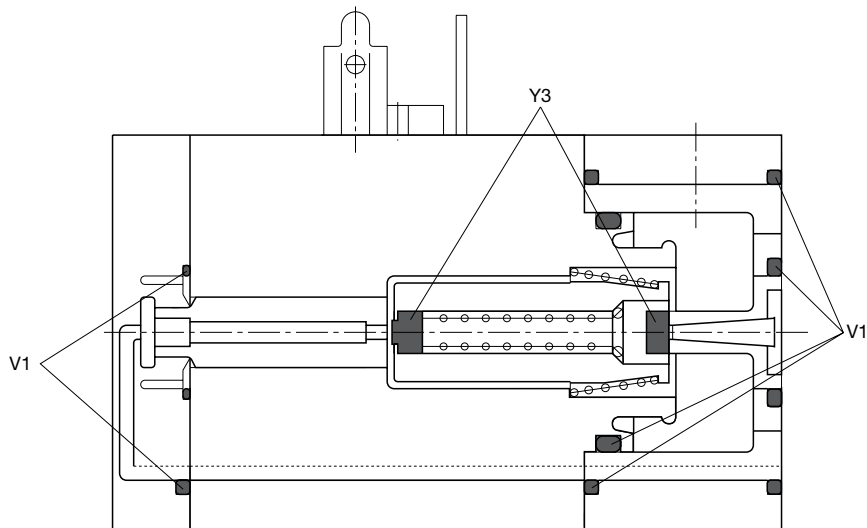

Sealing compounds for fluid technology

Compound code	Polymer base	Shore hard-ness ¹⁾	Colour	Temperature range ²⁾ (°C)			T-Onset (°C)	TR 10 (°C)	Media compatibility									
				min.	max.	short			Mineral oil	Poly-α-Olefin	HEPR	HEPG	HETG	HEES	DOT-3 / -4	HFAC, HFAS, HFB	HFC	

Rubber not resistant to mineral oil

E8924	EPDM	70A	black	-50	+150										.		
E3676	EPDM	75A ±5	black	-50	+150	200	< -45					.			.		
E0540	EPDM	80A ±5	black	-40	+150	170	< -45					.			.		
E9135	EPDM	80A ±5	black	-50	+150	200	< -45					.			.		
E8961	EPDM	85A	black	-50	+150										.		

Rubber resistant to mineral oil

V3656	FKM	70A ±5	green	-20	+200	230	< -9		.	.	.		.	.		.	
V9953	FKM	70A	black	-30	-200	230	< -28		.	.	.	.	.	.		.	.
V8750	FKM	70A	black	-20	+200				.	.	.	.	.	.		.	
V0747	FKM	75A ±5	black	-20	+200	230	< -10		.	.	.		.	.		.	
V8550	FKM	80A ±5	green	-25	+200	230	< -20		.	.	.		.	.		.	
V3681	FKM	80A ±5	green	-20	+200	230	< -10		.	.	.		.	.		.	
V3664	FKM	85A ±5	green	-20	+200	230	< -8		.	.	.		.	.		.	
V9154	FKM	85A ±5	black	-20	+200	230	< -10		.	.	.		.	.		.	
V3839	FKM	90A ±5	green	-20	+200	230	< -8		.	.	.	.	.	.		.	
V9771	FKM	90A	black	-30	+200				.	.	.	.	.	.		.	
N3560	NBR	60A ±5	black	-40	+100	120	< -35		.	.	.	.	.	.		.	.
N3567	NBR	70A ±5	black	-20	+100	120	< -16		.	.	.	.	.	.		.	.
N0674	NBR	70A ±5	black	-30	+100	120	< -22		.	.	.	.	.	.		.	.
N3571	NBR	70A ±5	black	-35	+100	120	< -25		.	.	.	.	.	.		.	.
N3854	NBR	70A ±5	black	-30	+100	120	< -19		.	.	.	.	.	.		.	.
N8602	NBR	70A ±5	black	-50	+80	100	< -45		.	.	.	.	.	.		.	.
N9150	NBR	70A ±5	black	-35	+120	135	< -25		.	.	.	.	.	.		.	.
N3566	NBR	75A ±5	yellow-brown	-20	+100	120	< -5		.	.	.	.	.	.		.	.
N3578	NBR	75A ±5	black	-30	+100	120	< -23		.	.	.	.	.	.		.	.

For specific requirements, special compounds are available. Please contact our consultancy service.

1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.

2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

Application														Standards	Remarks
HFD	Water	Compressed air	Acids	Lyes	Hydraulics	Pneumatics	Automotive	Industrial	Mining	oil and gas	Gas	Food, CPI	Drinking water		
		•						•				•		• USP Class VI • FDA 21 CFR 177.2600 • (EC) No. 1935/2004 • BfR XXI Kat.4 • PAK-free	
	•	•	•	•			•	•					•		
	•	•	•	•			•	•							
	•	•	•	•			•	•				•	•		• high tear resistance • high tensile strength
	•							•				•		• USP Class VI • FDA 21 CFR 177.2600 • (EC) No. 1935/2004 • BfR XXI Kat.4 • PAK-free	
	•		•	•	•	•	•	•	•	•	•				
	•	•		•			•		•	•	•				
								•				•			• FDA 21 CFR 177.2600
	•		•	•		•	•	•	•	•	•				
	•		•	•		•	•	•	•	•	•				
	•		•	•		•	•	•	•	•	•				• improved chemical resistance
	•		•	•		•	•		•	•	•				• wear-resistant • for shock absorber applications
	•		•	•		•		•	•	•	•				• for bonded seals (rubber/metal, etc.)
		•	•		•	•			•	•	•				
		•	•		•	•	•	•	•	•	•				• suitable for sealing plastic parts
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•			• limited ozone resistance acc. to ISO 1431-1, procedure B	• good low-temperature resistance
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				

Sealing compounds for fluid technology

Compound code	Polymer base	Shore hard-ness ¹⁾	Colour	Temperature range ²⁾ (°C)			T-Onset (°C)	TR 10 (°C)	Media compatibility									
				min.	max.	short			Mineral oil	Poly-α-Olefin	HEPR	HEPG	HETG	HEES	DOT-3 / -4	HFAE, HFAS, HFB	HFC	

Rubber resistant to mineral oil

N3580	NBR	80A $\pm$ 5	brown	-25	+80	100	< -18		.	.	.	.	.			.	.	
N8613	NBR	80A $\pm$ 5	black	-50	+80	100	< -45		.	.	.	.	.	.		.	.	
N3584	NBR	80A $\pm$ 5	black	-25	+100	120	< -20		.	.	.	.	.			.	.	
N3582	NBR	85A $\pm$ 5	brown	-10	+80	120	< -2		.	.	.	.	.	.		.	.	
N3589	NBR	85A $\pm$ 5	black	-20	+100	120	< -15		.	.	.	.	.			.	.	
N3544	NBR	90A $\pm$ 5	black	-25	+100	120	< -18		.	.	.	.	.	.		.	.	
N3587	NBR	90A $\pm$ 5	black	-25	+100	120	< -10		.	.	.	.	.			.	.	
N8615	HNBR/NBM	70A $\pm$ 5	black	-25	+130	150	< -22		.	.	.	.	.			.	.	
N8557	HNBR	75A $\pm$ 5	black	-35	+130	150	< -35		.	.	.	.	.			.	.	
N1173	HNBR	75A $\pm$ 5	black	-25	+150	170	< -20		.	.	.	.	.			.	.	
N3573	HNBR/NBM	75A $\pm$ 5	black	-20	+150	170	< -16		.	.	.	.	.			.	.	
N9192	HNBR	80A $\pm$ 5	grey	-35	+130	150	< -35		.	.	.	.	.			.	.	
N3510	HNBR/NBM	85A $\pm$ 5	black	-20	+150	170	< -18		.	.	.	.	.			.	.	
N3512	HNBR/NBM	90A $\pm$ 5	black	-20	+150	170	< -16		.	.	.	.	.			.	.	
N8526	HNBR/NBM	90A $\pm$ 5	black	-20	+150	170	< -16		.	.	.	.	.			.	.	

Rubber/fabric compounds

Q5009	NBR		dark grey	-40	+120				.	.	.	.	.			.	.	
Q5018	NBR		black	-40	+120				.	.	.	.	.			.	.	
Q5019	NBR		black	-40	+120				.	.	.	.	.			.	.	
Q5021	NBR		black	-40	+120				.	.	.	.	.			.	.	
Q5022	NBR		black	-40	+120				.	.	.	.	.			.	.	
Q5023	NBR		brown	-40	+120				.	.	.	.	.			.	.	
Q5024	NBR		brown	-40	+120				.	.	.	.	.			.	.	

Polyurethane compounds (Ultrathan®)

P5062	TPU	52D $\pm$ 5	black	-25	+110	130			.	.	.							
P5075	TPU	80A $\pm$ 5	ochre	-50	+80	100			.	.	.							
P5007	TPU	82A $\pm$ 5	green, transparent	-35	+80	110			.	.	.							

For specific requirements, special compounds are available. Please contact our consultancy service.

1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.

2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

Application														Standards	Remarks
HFD	Water	Compressed air	Acids	Lyes	Hydraulics	Pneumatics	Automotive	Industrial	Mining	oil and gas	Gas	Food, CPI	Drinking water		
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•			• limited ozone resistance acc. to ISO 1431-1, procedure B	• good low-temperature resistance • air brakes
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				• suitable for sealing non-ferrous metal and plastic parts
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				• only for wipers
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				• central hydraulics media
		•	•		•	•	•	•	•	•	•				• suitable for R134a, HFO 1234yf
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				• Adblue® resistant
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				
		•	•		•	•	•	•	•	•	•				• outstanding wear resistance
		•			•			•	•	•					• high-pressure cleaners
		•			•			•	•	•					• high-pressure cleaners
					•				•	•					
					•				•	•					
		•			•			•	•	•					• high-pressure cleaners
		•			•			•	•	•					• high-pressure cleaners
			•		•			•	•	•	•				• very good extrusion resistance • low friction • good hydrolysis resistance
			•			•	•	•							• outstanding low-temperature behaviour • outstanding dynamic behaviour
			•			•									

Sealing compounds for fluid technology

Compound code	Polymer base	Shore hard-ness ¹⁾	Colour	Temperature range ²⁾ (°C)			T-Onset (°C)	TR 10 (°C)	Media compatibility									
				min.	max.	short			Mineral oil	Poly-α-Olefin	HEPR	HEPG	HETG	HEES	DOT-3 / -4	HFAE, HFAS, HFB	HFC	

Polyurethane compounds (Ultrathan®)

P5070	TPU	83A ±5	green	-35	+85	110			.	.	.		.	.		.		
P5080	TPU	88A ±5	light green	-40	+85	110			.	.	.		.	.		.		
P5011	TPU	88A ±5	brown	-36	+85	110			.	.	.		.	.		.		
P5010	TPU	90A ±5	dark red	-30	+100	120			.	.	.		.	.		.		
P5012	TPU	90A ±5	red	-38	+100	120			.	.	.		.	.		.		
P4300	TPU	92A ±5	yellow	-50	+110	145			.	.	.		.	.		.		
P5004	TPU	93A ±5	black	-30	+80	100			.	.	.		.	.		.		
P5600	TPU	93A ±5	brown	-20	+80	100						.					.	
P5008	TPU	94A ±5	green	-35	+100	120			.	.	.		.	.		.		
P5009	TPU	94A ±5	grey	-45	+95	115			.	.	.		.	.		.		
P6030	TPU	94A ±5	orange	-35	+105	120			.	.	.		.	.		.		
P5000	TPU	94A ±5	dark green	-20	+100	120			.	.	.		.	.		.		
P5001	TPU	94A ±5	brown	-35	+100	120			.	.	.		.	.		.		
P6000	TPU	95A ±5	charcoal-grey	-35	+110	120			.	.	.		.	.		.		

Plastic materials

W5035	TPE-E	55D ±5	grey	-40	+100	120			.	.	.		.	.		.		
W5001	POM		nature	-40	+100	120			.	.	.	.	.	.		.	.	
W5019	PA 6.6 + 30 % glas fibre		black	-40	+120	140			.	.	.	.	.	.	.	.	.	
W5059	PA 6.6 + 35 % glas fibre		black	-40	+140	160			.	.	.	.	.	.	.	.	.	
W5098	PA 12	72D ±5	black	-50	+100	150			.	.	.	.	.	.	.	.	.	
W5097	PPA + 60 % glas fibre		dark grey	-40	+200	220			.	.			.	.		.		
W5082	PEEK + 30 % glas fibre		nature	-40	+250	300			.	.	.	.	.	.	.	.	.	
nobrox® W6101	PK		nature	-40	+120	135			.	.	.	.	.	.		.	.	
nobrox® W6100	PK		orange brown	-40	+120	135			.	.	.	.	.	.		.	.	
nobrox® W5071	PK		green (natural)	-40	+120	135			.	.	.	.	.	.		.	.	

For specific requirements, special compounds are available. Please contact our consultancy service.

1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.

2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

Application														Standards	Remarks
HFD	Water	Compressed air	Acids	Lyes	Hydraulics	Pneumatics	Automotive	Industrial	Mining	oil and gas	Gas	Food, CPI	Drinking water		
		•	•			•									
	•	•			•		•								• stick-slip free sliding • central hydraulics media
	•	•				•	•	•							• friction-optimized • very good wear resistance
		•			•	•									• central hydraulics media
		•			•		•	•							• excellent high-temperature behaviour • excellent dynamic behaviour
		•			•							•			
•	•	•	•	•		•		•				•	•		
		•			•	•		•	•	•	•				• excellent low-temperature behaviour
			•		•			•	•	•	•				• high wear resistance
	•	•			•	•	•	•	•			•		• FDA	• good hydrolysis resistance
	•	•			•	•	•	•	•						• good hydrolysis resistance
		•			•				•	•					• excellent wear resistance
			•		•	•									
•	•	•	•		•	•				•	•	•			
		•	•	•	•	•	•	•	•	•					
	•	•	•	•	•	•	•	•	•	•					
		•	•	•	•	•	•	•	•	•					
•		•			•	•	•	•							
•	•	•	•		•	•	•	•				•	•	• FDA	• limited resistance to acids and lyees
•	•	•	•		•	•	•	•							• limited resistance to acids and lyees
•	•				•	•	•	•							• limited resistance to acids and lyees • rotary transmissions

Sealing compounds for fluid technology

Compound code	Polymer base	Shore hardness ¹⁾	Colour	Temperature range ²⁾ (°C)			T-Onset (°C)	TR 10 (°C)	Media compatibility									
				min.	max.	short			Mineral oil	Poly-α-Olefin	HEPR	HEPG	HETG	HEES	DOT-3 / -4	HFAE, HFAS, HFB	HFC	

O-ring compounds for Slipper Seals®

N0674	NBR	70A ±5	black	-30	+100	120	< -22		.	.	.	.	.	.		.	.	
N0756	NBR	75A ±5	black	-50	+110	120	< -40		.	.	.	.	.	.		.	.	
N3578	NBR	75A ±5	black	-30	+110	120	< -26		.	.	.	.	.			.	.	
N0552	NBR	90A ±5	black	-30	+100				.	.	.	.	.	.		.	.	
N1173	HNBR	75A ±5	black	-25	+150	170	< -20		.	.	.	.	.			.	.	
V0747	FKM	75A ±5	black	-20	+200	230	< -10		.	.	.		.	.		.		
E0540	EPDM	80A ±5	black	-40	+150	170	< -45					.			.			

Polon® compounds

Polon® TE001	Unfilled PTFE		ivory	-260	+260				.	.	.	.	.	.	.	.	.	
Polon® TE003	PTFE + glass fibre/MoS2		silver grey	-260	+260				.	.	.	.	.	.	.	.	.	
Polon® TE006	UHMW-PE, unfilled		natural	-200	+80				.	.							.	
Polon® TE012	mPTFE + glass fibre		white	-260	+300				.	.	.	.	.	.	.	.	.	

For specific requirements, special compounds are available. Please contact our consultancy service.

- 1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.
- 2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

Application														Standards	Remarks
HFD	Water	Compressed air	Acids	Lyes	Hydraulics	Pneumatics	Automotive	Industrial	Mining	oil and gas	Gas	Food, CPI	Drinking water		
		•	•		•	•	•	•	•	•	•				• standard O-ring compound for slipper seals®
		•	•		•	•			•		•				
		•	•		•	•			•						
		•	•		•	•								• DIN EN 549 • ASTM 7 BG 915 - B14 EO14 EO34 - EF11 EF21 F17 • SAE J515 Type 1	
		•	•		•	•	•	•	•	•	•				• suitable for R134a, HFO 1234yf
	•		•		•	•	•	•	•		•				
		•	•	•	•			•	•						
	•	•	•	•				•				•	•		• best for static applications requiring positive sealing • good in vacuum with low gas permeability • good for cryogenic service • low-strength material • can be used as anti-extrusion ring in combination with elastomeric O-Rings
		•	•	•	•			•				•			• excellent wear resistance because of internal lubrication • often used for high-pressure extrusion resistance or high speed, high-pressure rotary applications • only for use on very hard mating surface because of its abrasive properties • low thermal expansion • do not use with strong bases, oxidizing acids, chlorine or hydrofluoric acid
		•	•	•	•	•	•	•	•			•	•		• among the toughest, most wear-resistant materials but limited temperature and chemical resistance • low abrasion to soft counter surfaces • intended for reciprocating or very slow rotary applications • good lubricity in water • can serve in cryogenic conditions • higher coefficient of friction than PTFE
		•	•	•	•		•	•							• improved wear resistance compared to unfilled PTFE • low duty hydraulic application

Sealing compounds for fluid technology

Compound code	Polymer base	Shore hardness ¹⁾	Colour	Temperature range ²⁾ (°C)			T-Onset (°C)	TR 10 (°C)	Media compatibility									
				min.	max.	short			Mineral oil	Poly- α -Olefin	HEPR	HEPG	HETG	HEES	DOT-3 / -4	HFAE, HFAS, HFB	HFC	
Polon® TE025	mPTFE + glass fibre		green	-260	+300				.	.	.	.	.	.	.	.	.	
Polon® TE030	PTFE + carbon/graphite		black	-260	+300				.	.	.	.	.	.	.	.	.	
Polon® TE031	mPTFE + glass fibre		ivory	-260	+300				.	.	.	.	.	.	.	.	.	
Polon® TE033	PTFE + carbon		black	-260	+300				.	.	.	.	.	.	.	.	.	
Polon® TE044	PTFE + graphite		grey-black	-260	-300				.	.	.	.	.	.	.	.	.	
Polon® TE052	PTFE + bronze		bronze	-260	+300				.	.	.	.	.	.	.	.	.	
Polon® TE062	PTFE + bronze		bronze	-260	+300				.	.	.	.	.	.	.	.	.	
Polon® TE074	PTFE + carbon fibre		grey-black	-260	+300				.	.	.	.	.	.	.	.	.	

For specific requirements, special compounds are available. Please contact our consultancy service.

- 1) Hardness values are average values, measured on standard specimen of 6 mm thickness acc. to DIN 53505. On finished parts, only micro hardness (IRHD-M) can typically be measured, which leads to different results.
- 2) The minus temperatures are provided as a general guideline only because functionality at low temperatures depends on seal design, operating conditions and the condition of adjoining metal parts. The plus temperatures stated depend on the application. They may be exceeded but will reduce service life accordingly. Short-term operation without loads, e.g. during painting processes, above the temperature limit is permissible. Long-term operation above the temperature limit will reduce service life. The use of aggressive media intensifies the degradation process.

Sealing compounds for fluid technology

Application														Standards	Remarks
HFD	Water	Compressed air	Acids	Lyes	Hydraulics	Pneumatics	Automotive	Industrial	Mining	oil and gas	Gas	Food, CPI	Drinking water		
		•	•	•	•			•	•	•					• excellent wear resistance because of internal lubrication • only for use on very hard mating surface because of its abrasive properties • low thermal expansion • do not use with strong bases or hydrofluoric acid • medium-duty hydraulic applications
	•	•	•	•		•		•							• water / oil hydraulics • excellent all-purpose material • performs well in non-lubricated systems
	•	•	•	•		•		•							• improved pressure resistance compared to Polon® TE012 • improved wear resistance • only for use on very hard mating surfaces • do not use with strong bases or hydrofluoric acid
	•	•	•	•		•		•							• high wear resistance • typical rotary Slipper Seal® material • good dry running capabilities • typically used for application in contact with water • high compressive strength and creep resistance • not to be used in combination with highly oxidizing agents • guiding tape material for cylinders made of alloys, light metal and high-grade steel
	•	•	•	•			•	•	•	•					• higher wear resistance than unfilled PTFE • excellent for corrosive service, steam and hot water applications • ideal for unlubricated service • low abrasion to soft counter surfaces • recommended choice for guiding tapes
	•	•	•	•	•		•	•	•	•					• good for full contact hydraulic applications • excellent for high speeds • standard guiding ring material
	•	•	•	•	•		•	•	•	•					• higher bronze content than Polon® TE052 material for better wear resistance • good for full contact hydraulic applications • excellent for high speeds
	•	•	•	•	•	•	•	•	•	•					• carbon fibre lowers creep, increases flexural and compressive modulus and raises hardness • improved (lower) thermal expansion • less abrasive than glass fibre • excellent wear behaviour in aqueous environments • recommended for high-frequency/short-stroke applications • recommended choice for SlipperSeal® and guiding tapes

General installation guidelines for piston seals

Complete piston

Installation for complete pistons

The Parker DP, DR and DE complete pistons have a sealing bead on one side of the inner diameter for reliable static sealing.

To take advantage of this sealing bead, the stated dimensions must be observed.


Assembly conditions

For the double-acting DP and DR complete pistons the short assembly version (A) may be selected. In this case the complete piston must be pushed onto the end of the piston rod with the sealing bead forwards during assembly.

If a single-acting DE complete piston is used and the application requires the sealing lip to be pointing away from the piston rod assembly version A may be used as well.

If the sealing lip of the DE points towards the piston rod, then the sealing bead must be on the side away from the piston rod and assembly version B is used. To bridge the lead-in chamfer and the thread undercut, a suitable back-up ring must be installed between the nut and the complete piston.

The DK and EK complete pistons have no inner sealing bead and can be installed like DR and DP. The orientation is immaterial in this case.

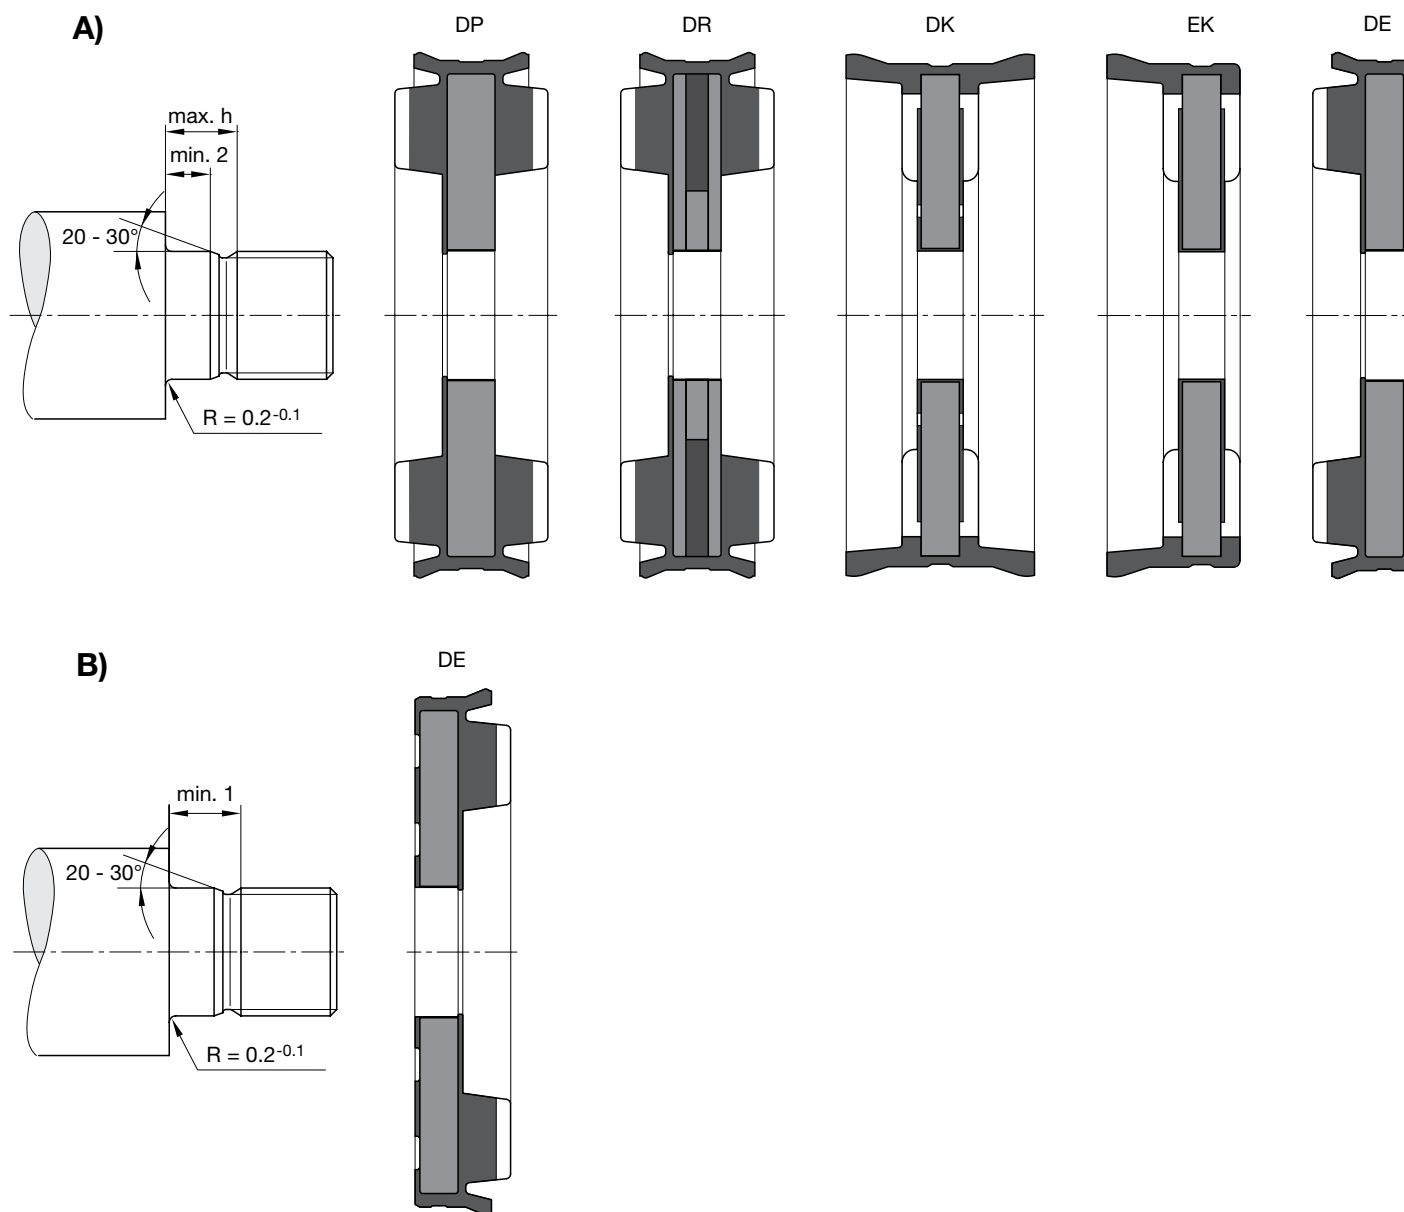

General installation guidelines for piston seals

PTFE seals

Installation guidelines for PTFE seals

The grooves must be carefully cleaned and deburred. The cylinder bore must have a lead-in chamfer. When fitting the piston sealing ring there is always the danger that the ring may tilt and be sheared off by normal lead-in chamfers (see fig.). We therefore recommend that up to a cylinder diameter of 230 mm a lead-in chamfer according to detail "A" is considered. In the case of smaller rings which are especially liable to bending we recommend an open-groove design for diameters smaller than 30 mm.

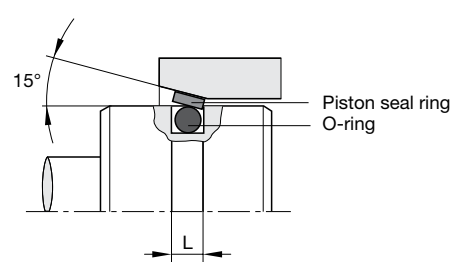


Fig. 1

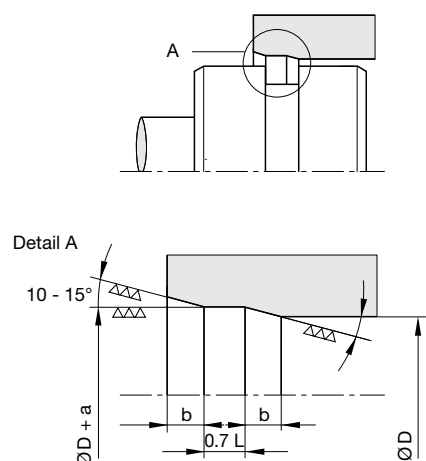


Fig. 2

Ø D	min. a	max. b
≤ 45	0.8	2.4
45 - 175	1	3
175 - 230	1.5	4.5

Assembly instruction for PTFE seals

Install the O-ring in the groove as per normal practice. Piston sealing rings of up to 100 mm diameter and wall thickness of over 1.6 mm should be "slowly" expanded and fitted with an assembly tool (see fig. 3). Larger rings can be expanded by hand. Uneven stretching or overstretching must be avoided under all circumstances.

Should it be necessary to pull the rings over existing guide ring grooves, then these grooves must be covered with plastic

tape, or alternatively the expanding mandrel must reach the groove in question (see fig. 3). This ensures that the piston sealing ring does not snap into the wrong groove. The use of a burnishing shell is recommended when the assembly of a piston is made difficult by an overstretched ring or when the cylinder has an inadequate lead-in chamfer (see fig. 4). Assembly aids can be manufactured conveniently out of metal. However, in many cases polyamide or POM is also suitable.

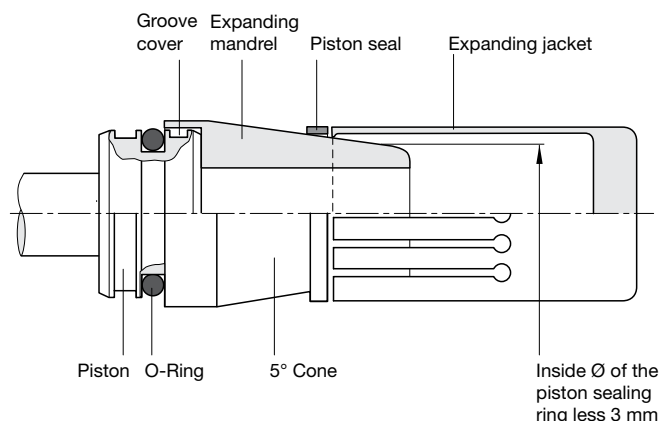


Fig. 3




Fig. 4

General installation guidelines for rod seals

International (ISO) and national (DIN) standards for seal housing dimensions are in place and should be considered. For seals requiring a special groove, e.g. special seals, valve seals, rotor seals etc., the groove dimensions are stated separately. In general, the surface finishes, leading edge chamfers and dimensions stated here have already proved themselves and will mostly be found in the standards.

We recommend that customers adhere to the tolerances and surface finishes stated in this catalogue. This is a prerequisite for easy, damage-free installation and for the seal to retain the properties stated in this catalogue.

Surfaces: Grinding as final machining process for dynamic sealing surfaces is not sufficient. These surfaces have to be polished afterwards.


Radii: As for the necessary radii (r) please refer to the respective profile data or the applicable standards.

Non-sealing surfaces and lead-in chamfers

R_3 : R_z 16 μm / R_a 4 μm

R_4 : R_z 10 μm / R_a 1.6 μm

* Measured in a depth of 25 % of the R_z -value based on a reference level (zero line) set at 5 % bearing area.

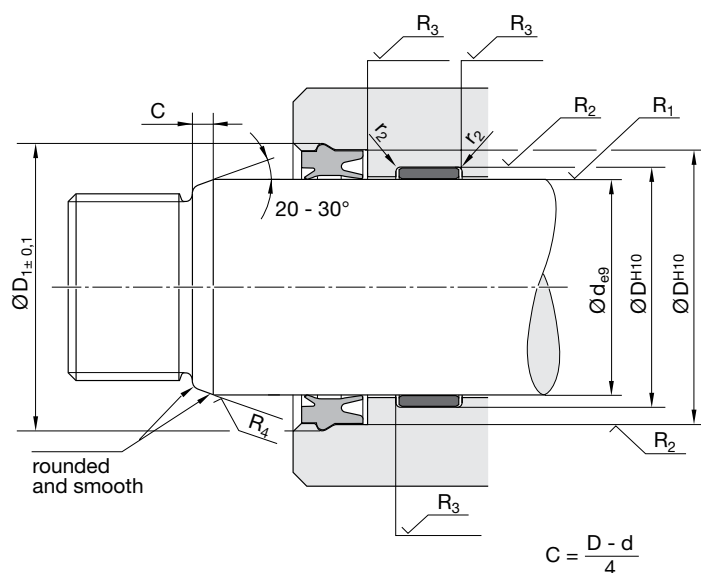

Surfaces

Dynamic sealing surfaces

For rubber and PTFE products

R_1 : R_z 1.0 μm / R_a 0.2 μm

$80 \% \leq *t_{p1} \leq 95 \%$

For polyurethane products

R_1 : R_z 1.6 μm / R_a 0.4 μm

$60 \% \leq *t_{p1} \leq 80 \%$

Static sealing surfaces

R_2 : R_z 6.3 μm / R_a 0.8 μm

$*t_{p2} \geq 60 \%$

General installation guidelines for rod seals

PTFE seals

Installation guidelines for PTFE seals

The grooves must be carefully cleaned and deburred. The rods must have a lead-in chamfer (see picture on previous page).

We recommend open-groove designs for rod diameters smaller than 30 mm as these rings are prone to breaking if deformed as described above.

Assembly instruction for PTFE seals

First the O-ring must be installed in the groove. Then the rod seal should be carefully formed into a kidney shape without sharp bends as shown in fig. 2. This deformed ring is placed in the groove and rounded with the aid of a pin.

Fig. 1: Another type of installation aid. It consists of a metal pin which has a female cone-shaped recess at one of its front-ends. The PTFE ring can be easily placed in the recess by manually deforming it (see fig. 2). Due to the reduced diameter the PTFE ring (still placed on the pin) can now be installed into the groove. After removal of the pin the PTFE ring can be pressed into the groove and re-formed.

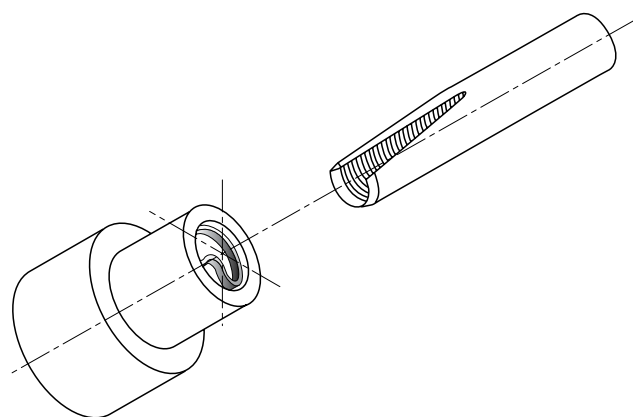


Fig. 1

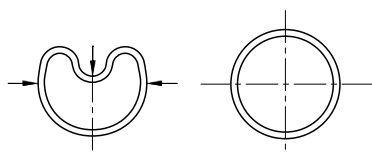


Fig. 2

Maximum gap allowance

Definition

The maximum gap "e", stated with the respective profile, stands for the maximum gap occurring between rod and guidance resp. between piston and cylinder exhausting all tolerances and maximum excentricity.

Conditions


1. Surface quality according to our recommendations (see „General Installation Guidelines“)
2. Lubricating fluids

For special conditions, e.g. nonlub fluids, water, acids, alcalies, please contact our consultancy service.

The nomographs in our catalogues have been developed for the "worst case", that means pushing conditions (for the rod e.g. plunger conditions) and softest material in the corresponding group (e.g. 85 Shore A for polyurethanes and 70 Shore A for NBR).

If the application is not in a pushing mode, the extrusion gap can be increased by 25%.

If instead of a 85 Shore A polyurethane a 93 Shore material or instead of a 70 Shore NBR a 85 Shore material is used, the extrusion gap can be increased by another 15 % (intermediate values to be balanced).

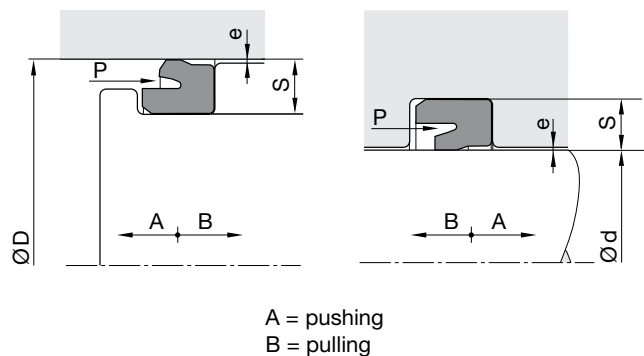

Example 1: Polyurethane seals of Shore A ≥ 85 and cotton-reinforced seals

(see following pages)

d/D	= Dynamic seal diameter = 63 mm*
S	= Cross-section = 5 mm
P	= Pressure = 10 bar
T	= Temperature = 80 °C

* Insert the dynamic diameter and not the static one (groove diameter or tight fit). Means cylinder diameter for the piston seal (D) and rod diameter for the rod seal (d).

Method:

1. Draw a line connecting d/D to S and extend it until intersection with the line ξ1.
2. Draw a line connecting P to T and extend it until intersection with the line ξ2.
3. Connect the two intersections and read the allowable gap (0.71 mm) on scale "e".

Example 2: NBR, HNBR and FKM seals between 70 and 85 Shore A

(see following pages)

d/D	= Dynamic seal diameter = 50 mm*
S	= Cross-section = 5 mm
P	= Pressure = 16 bar
T	= Temperature = 50 °C


* Insert the dynamic diameter and not the static one (groove diameter or tight fit). Means cylinder diameter for the piston seal (D) and rod diameter for the rod seal (d).

Method:

1. Draw a line connecting d/D to S and extend it until intersection with the line ξ1.
2. Draw a line connecting P to T and extend it until intersection with the line ξ2.
3. Connect the two intersections and read the allowable gap (0.64 mm) on scale "e".


Maximum gap allowance

Polyurethane seals of Shore A ≥ 85 and
cotton-reinforced seals

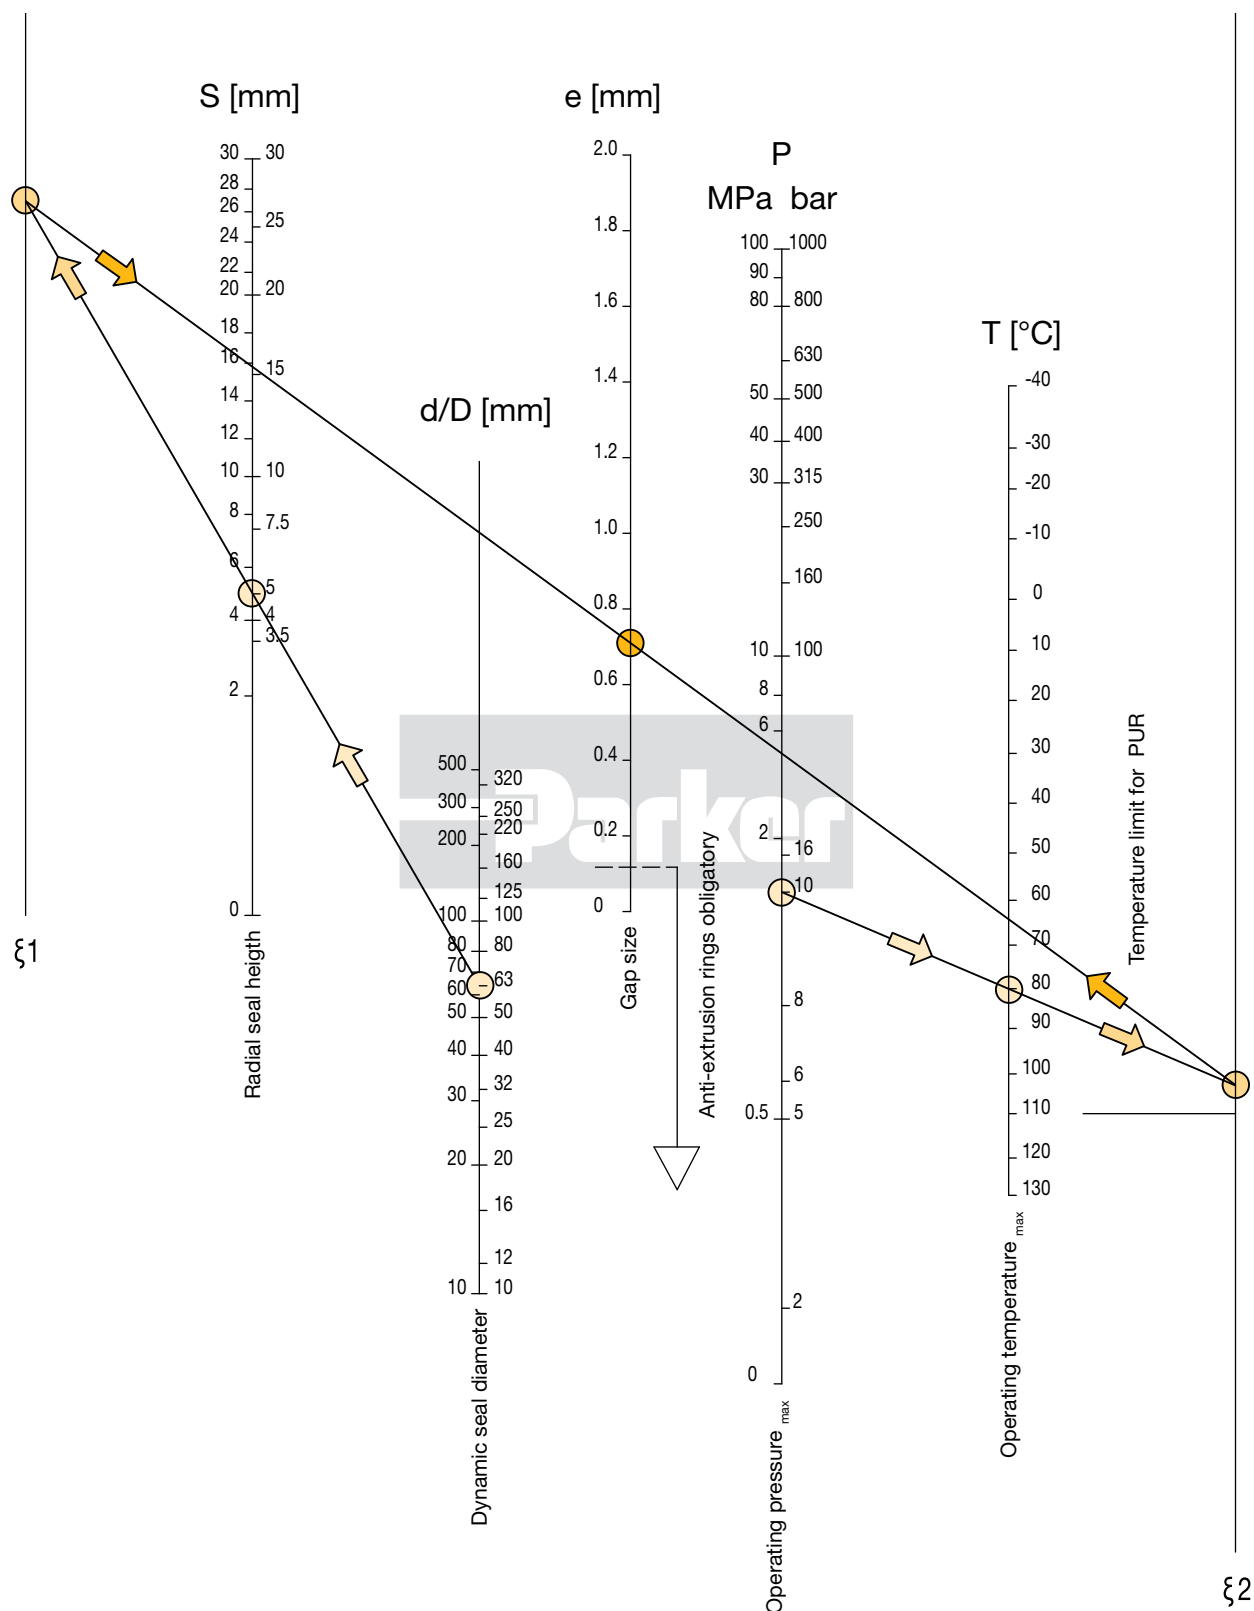

Maximum gap allowance

NBR, HNBR and FKM seals between 70 and 85 Shore

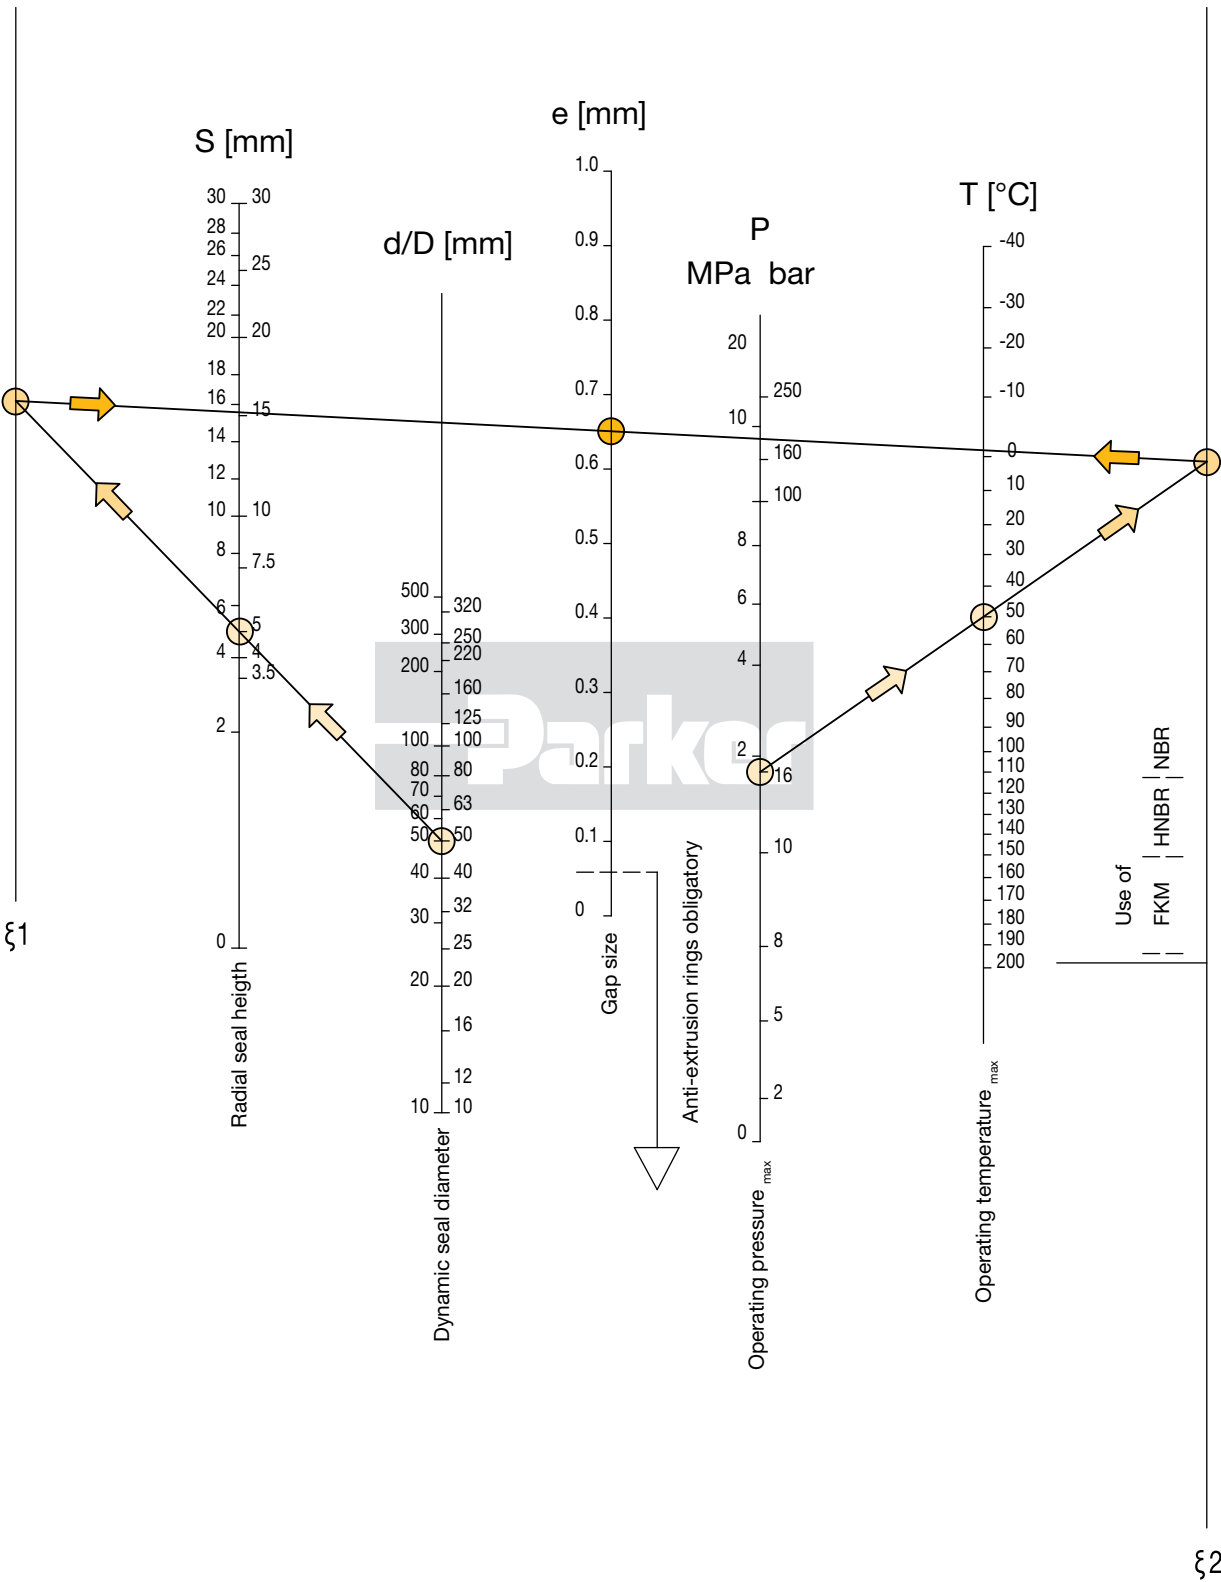




Maximum gap allowance


Rod seals

Profile cross-section	Profile reference	Page
-----------------------	-------------------	------

Rod seals


	E5 (NBR)	28
	E5 (TPU)	28
	Z9	30
	C1	32
	GS	36

Rod seals with wiper


	EU	38
	EN	40
	E7	42
	E8	44
	E9	46
	EW	48
	EL (NBR)	50
	EL (TPU)	50
	EM	52

Profile cross-section	Profile reference	Page
-----------------------	-------------------	------

Rod seals with wiper for anti-rotation pneumatic cylinders

	ET	54
	EF	56

Rod seals with wiper and guiding element

	EP	58
---	----	----



The E5 rod seal is a U-ring specifically designed for use in pneumatic applications. The dimensions of the standard range conform to the rod diameters according to ISO 3320 or CETOP RP 52 P, RP 43 P and RP 53 P. The E5 rod seal is available in both Ultrathan® and rubber compounds. The Ultrathan® variants are characterized by extremely high wear resistance and resistance against pressure peaks.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Robust seal profile for harshest operating conditions.
- Good wear resistance.
- Long service life thanks to application-optimized compounds.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed and undercut housings.

Range of Application

Mainly used for pneumatic cylinders.

Operating pressure ≤ 16 bar

Operating temperature -30 °C to $+80$ °C

Sliding speed ≤ 1 m/s

Media Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: N3578, NBR compound (≈ 75 Shore A).

For low temperatures: N8602, NBR compound (≈ 70 Shore A).

For high temperatures: V8550, FKM compound (≈ 80 Shore A).

Standard: P5010, PUR compound (≈ 90 Shore A).

For low temperatures: P5009, PUR compound (≈ 94 Shore A).


Installation

The profile E5 lip seals can be easily snapped into the groove. In order to prevent damage to the seal lips during assembly, any sharp edges in the vicinity of the groove must be removed. The dynamic seal lip will only acquire its ultimate functional size if the dimensions of the installation groove are properly machined after installation.

Under dry operating conditions it is absolutely essential to maintain a full lubrication film on the rod. This is ensured by appropriate initial lubrication. When using the profile E5 lip seal in pneumatic cylinders under non-lubricated conditions, a suitable wiper which does not destroy the lubrication film on the piston rod must be used. In this case, we recommend our profile A2 wiper specially designed for pneumatics.

Note: For nominal diameters ≤ 25 mm an open housing is recommended depending on the cross-section of the seal and the position of the groove (stuffing box installation).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

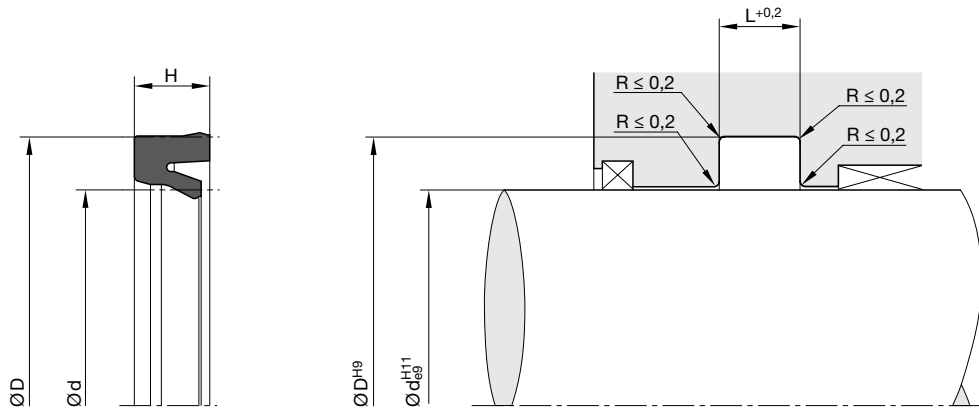

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code	d	D	H	L	Order code
E5 NBR N3578					35	45	7.5	8	E5 3545 N3578
3	10	5	5.5	E5 0002 N3578	40	48	8	9	E5 4048 N3578
4	8	3	3.5	E5 0003 N3578	40	50	7.5	8	E5 4050 N3578
5	9	2.5	3	E5 0005 N3578	44	54	7	7.5	E5 4454 N3578
6	12	4	4.5	E5 0026 N3578	45	55	7	7.5	E5 4555 N3578
8	12.7	4.5	5	E5 0068 N3578	50	60	7	7.5	E5 5060 N3578
8	13	4	4.5	E5 0070 N3578	54	64	7	7.5	E5 5464 N3578
8	14	4	4.5	E5 0080 N3578	55	70	11.5	12.5	E5 5570 N3578
10	15	3.5	4	E5 1015 N3578	56	66	7	7.5	E5 5666 N3578
10	16	4.5	5	E5 1016 N3578	63	75	7	7.5	E5 6372 N3582
10	17	6	6.5	E5 1017 N3578	63	75	8.5	9.5	E5 6375 N3578
10	18	5.5	6	E5 1019 N3578	70	80	7	7.5	E5 7080 N3578
12	18	4.5	5	E5 1217 N3578	80	92	8.5	9.5	E5 8092 N3578
12	19	4.5	5	E5 1219 N3578	E5 PUR P5010				
12	20	5.5	6	E5 1220 N3578	10	18	5	5.5	E5 1018 P5008
12	22	7.5	8	E5 1222 N3578	12	20	5.5	6	E5 1220 P5008
14	22	5	5.5	E5 1422 N3578	20	30	7.5	8	E5 2030 P5010
14	22	5.5	6	E5 1423 N3578					
16	22	4	4.5	E5 1622 N3578					
16	24	5.5	6	E5 1624 N3578					
16	26	7	7.5	E5 1626 N3578					
18	25	5	5.5	E5 1804 N3578					
18	26	5.5	6	E5 1805 N3578					
18	24	4	4.5	E5 1824 N3578					
20	28	5.5	6	E5 2028 N3578					
20	30	7.5	8	E5 2030 N3578					
20	32	7.5	8	E5 2032 N3578					
22	30	5.5	6	E5 2230 N3578					
23	31	7	7.5	E5 2331 N3580					
25	35	7	7.5	E5 2534 N3578					
25	35	7.5	8	E5 2535 N3578					
30	40	6	6.5	E5 3039 N3578					
30	40	7.5	8	E5 3040 N3578					
32	42	7	7.5	E5 3264 N3578					

Further sizes on request.



The Z9 rod seal is a single-acting U-ring with interference fit on the outer diameter for sealing piston rods in pneumatic cylinders and valves. It is characterized by small axial installation dimensions. The standard range of the Z9 product series conforms to the cylinder diameters according to ISO 3320 or CETOP RP 52 P, RP 43 P and RP 53 P.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Good wear resistance.
- Low static and dynamic friction thanks to miniaturized design.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed and undercut housings.

Range of Application

For use in pneumatic cylinders.

Operating pressure	≤ 16 bar
Operating temperature	-20 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: N3580, a special NBR-based SFR® elastomer (≈ 80 Shore A). This compound offers excellent running properties, especially in the semi-frictional area.

For low temperatures: N8602, NBR compound (≈ 70 Shore A).


For high temperatures: V3664, FKM compound (≈ 85 Shore A).

Installation

The profile Z9 lip seals can be easily snapped into the groove. To avoid damaging the seal lips during installation, sharp edges should be removed from around the installation groove. The groove dimensions determine the size of the dynamic lip. It is therefore essential to ensure that the groove is accurately machined. It is important to maintain a full lubrication film on the rod when running under non-lubricated conditions. Lubrication should take place during assembly. When using the profile Z9 lip seal under non-lubricated conditions, care should be taken to ensure that the lubrication film is not destroyed by the wiper. For this case we recommend our wiper profile A2, specially designed for pneumatics.

Note: For nominal diameters ≤ 25 mm an open housing is recommended, according to the cross-section of the seals and the position of the groove (stuffing box installation).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

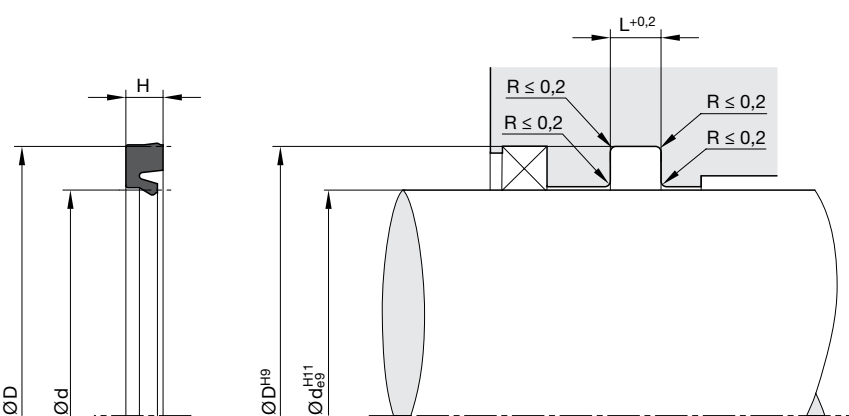

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code
2	4.4	2.2	2.6	Z9 0204 N3510
3	6	2.2	2.6	Z9 0303 N3580
3	6.5	2.2	2.6	Z9 0304 N3580
10	16	2.55	3	Z9 1004 N3580
12	18	2.55	3	Z9 1204 N3580
16	22	2.55	3	Z9 1605 N3580
17	24	2.55	3	Z9 1724 N3580

Further sizes on request.



The C1 rod seal is a U-ring with interference fit on the outer diameter. Excellent sealing performance is achieved with minimal profile width and height. Extremely low friction due to short seal contact area. Use in pneumatic equipment is only possible with constant lubricant supply, e.g. oiled air. For non-oiled (dry air) pneumatic systems, we recommend our E5 product series.

- Good wear resistance.
- Easy installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.

Range of Application

The C1 rod seal is particularly suitable for plungers, piston rods, stems and valve lifters as well as for slowly operating pneumatic rotors ($v \leq 0.2 \text{ m/s}$).

Operating pressure	$\leq 160 \text{ bar}^{1)}$
Hydraulics	$\leq 160 \text{ bar}$
Pneumatics	$\leq 16 \text{ bar}$
Rotary transmissions	$\leq 20 \text{ bar}$
Operating temperature	
Hydraulics	$-35 \text{ }^{\circ}\text{C}$ to $+100 \text{ }^{\circ}\text{C}$
Pneumatics	$-35 \text{ }^{\circ}\text{C}$ to $+80 \text{ }^{\circ}\text{C}$
Sliding speed	
Hydraulics	$\leq 0.5 \text{ m/s}$
Pneumatics	$\leq 1 \text{ m/s}$
Rotary transmissions	$\leq 0.2 \text{ m/s}$

Recommendation for rotary transmissions: $P \times v \leq 3$
(Definition see catalogue „Hydraulic Seals“, chapter „Rotary Seals“, introduction).

¹⁾ Dependent upon cross-section and compound.

Compounds

Standard: N3571, NBR compound ($\approx 70 \text{ Shore A}$).

For low temperatures: N8602, NBR compound ($\approx 70 \text{ Shore A}$).

For high temperatures: V3664, FKM compound ($\approx 85 \text{ Shore A}$).


Installation

The profile C1 rod seals are manufactured over-sized on the external diameters in relation to the nominal dimensions. This ensures the required tight fit. Only after installation the sealing lip diameter will show the desired dimensions. Profile C1 can easily be snapped into the grooves.

When choosing a seal for a particular diameter, it is best to select the one with the largest possible cross-section.

Note: For nominal diameters $\leq 25 \text{ mm}$ an open housing is recommended, according to the seals cross-section and the position of the groove (stuffing box installation).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

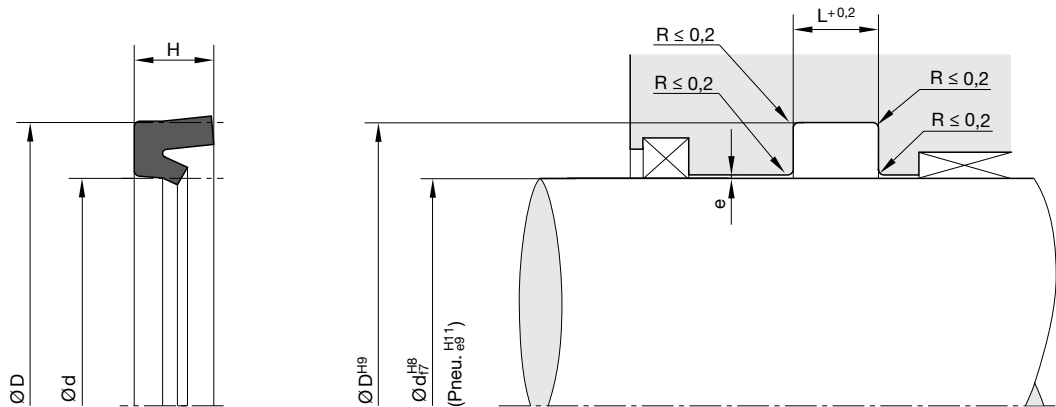


„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code	d	D	H	L	Order code
2	7	3.5	4	C1 0003 N3571	12	18.5	4.5	5	C1 1028 N3571
3	7	3	3.5	C1 0005 N3571	12	19	4.5	5	C1 1030 N3571
3	9	4.5	5	C1 0009 N3571	12	20	5.5	6	C1 1033 N3571
3	10	5	5.5	C1 0011 N3571	13	17.5	2.8	3.3	C1 1036 N3571
4	8	3	3.5	C1 0013 N3571	13.8	22	5.5	6	C1 1037 N3571
4	9	3.5	4	C1 0016 N3571	14	19	3.5	4	C1 1039 N3571
4	10	4.2	4.7	C1 0019 N3571	14	20	4.8	5.3	C1 1040 N3571
4	12	4.5	5	C1 0022 N3571	14	22	5.5	6	C1 1041 N3571
4	12	5.5	6	C1 0024 N3571	14	25	8	8.5	C1 1042 N3571
4.5	8	3	3.5	C1 0032 N3571	15	22	5	5.5	C1 1044 N3571
5	9	2.5	3	C1 0035 N3571	16	22.5	4.5	5	C1 1049 N3571
5	10	4	4.5	C1 0038 N3571	16	23	5.5	6	C1 1051 N3571
5	12	4.5	5	C1 0041 N3571	16	24	5.5	6	C1 1053 N3571
6	10	3	3.5	C1 0055 N3571	16	26	7	7.5	C1 1056 N3571
6	12	4.2	4.7	C1 0058 N3571	17	25	5.5	6	C1 1060 N3571
6	13	5	5.5	C1 0059 N3571	18	25	4.5	5	C1 1062 N3571
6	15	7	7.5	C1 0062 N3571	18	25	5.5	6	C1 1063 N3571
6	16	5	5.5	C1 0065 N3571	18	26	5.5	6	C1 1066 N3571
7	13	4	4.5	C1 0070 N3571	18.5	25.5	5.5	6	C1 1074 N3571
8	14	4	4.5	C1 0074 N3571	20	26	4	4.5	C1 2003 N3571
8	14.5	4.5	5	C1 0077 N3571	20	26	4.8	5.3	C1 2005 N3571
8	16	5.5	6	C1 0080 N3571	20	28	5.5	6	C1 2009 N3571
8	18	8	8.5	C1 0083 N3571	20	28	8	8.5	C1 2013 N3571
9	14	3.5	4	C1 0087 N3571	20	30	7	7.5	C1 2020 N3571
9.3	14	3	3.5	C1 0090 N3571	20	32	7	7.5	C1 2022 N3571
9.5	18.5	7	7.5	C1 0094 N3571	22	29	5.5	6	C1 2025 N3571
10	13.6	2.3	2.7	C1 1002 N3571	22	30	5.5	6	C1 2029 N3571
10	15	3.5	4	C1 1005 N3571	23	31	5.5	6	C1 2038 N3571
10	16	4.5	5	C1 1008 N3571	24	32	5.5	6	C1 2043 N3571
10	16	6	6.5	C1 1011 N3571	25	32	5.5	6	C1 2053 N3571
10	18	5.5	6	C1 1015 N3571	25	33	5.5	6	C1 2058 N3571
10	20	7	7.5	C1 1018 N3571	25	33	8	8.5	C1 2061 N3571
11	17	4	4.5	C1 1022 N3571	25	35	6	6.5	C1 2064 N3571
11	18	4.5	5	C1 1025 N3571	25	35	7	7.5	C1 2065 N3571

Further sizes on request.

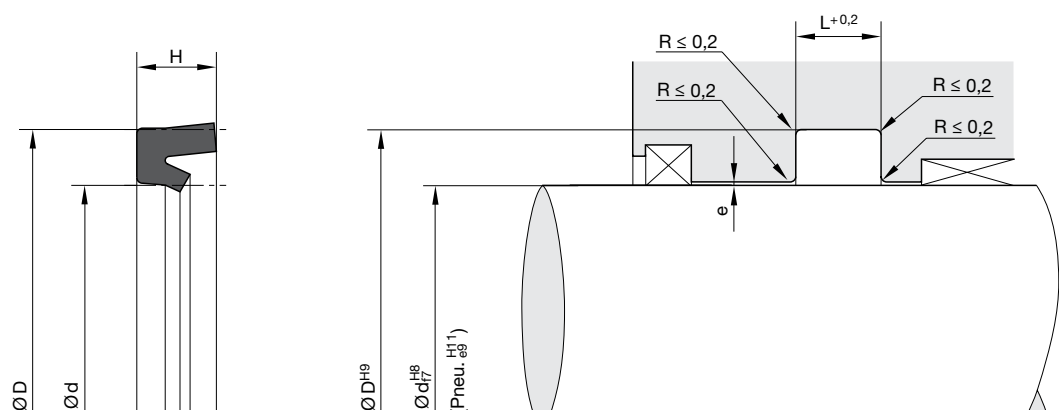


„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code	d	D	H	L	Order code
25	37	8.5	9.5	C1 2069 N3571	56	66	7	7.5	C1 5043 N3571
25	40	10	11	C1 2075 N3571	58	68	7	7.5	C1 5058 N3571
26	36	7	7.5	C1 2078 N3571	60	72	8.5	9.5	C1 6005 N3571
28	36	5.5	6	C1 2085 N3571	63	73	7	7.5	C1 6025 N3571
28	38	7	7.5	C1 2089 N3571	63	75	8.5	9.5	C1 6035 N3571
30	38	5.5	6	C1 3005 N3571	63	78	8.5	9.5	C1 6036 N3584
30	38	8	8.5	C1 3010 N3571	64	76	7.5	8	C1 6040 N3571
30	40	7	7.5	C1 3015 N3571	65	77	8.5	9.5	C1 6055 N3571
30	42	8	8.5	C1 3019 N3571	68	80	8.5	9.5	C1 6070 N3571
30	42	8.5	9.5	C1 3020 N3571	70	82	8.5	9.5	C1 7003 N3571
32	40	5.5	6	C1 3025 N3571	75	87	8.5	9.5	C1 7020 N3571
32	42	7	7.5	C1 3030 N3571	80	90	7	7.5	C1 8010 N3571
33	43	7	7.5	C1 3035 N3571	80	92	8.5	9.5	C1 8015 N3571
34	44	7	7.5	C1 3040 N3571	80	100	14	15	C1 8025 N3571
35	43	8	8.5	C1 3045 N3571	85	97	8.5	9.5	C1 8040 N3571
35	45	7	7.5	C1 3050 N3571	85	100	10	11	C1 8045 N3571
36	46	7	7.5	C1 3055 N3571	90	102	8.5	9.5	C1 9015 N3571
36	50	10	11	C1 3057 N3571	95	107	8.5	9.5	C1 9035 N3571
38	48	7	7.5	C1 3060 N3571	100	110	7	7.5	C1 A010 N3571
40	48	8	8.5	C1 4010 N3571	100	115	10	11	C1 A015 N3571
40	50	7	7.5	C1 4015 N3571	105	120	10	11	C1 A051 N3571
40	52	8.5	9.5	C1 4020 N3571	105	125	12	13	C1 A055 N3571
42	52	7	7.5	C1 4025 N3571	110	125	10	11	C1 B015 N3571
44	54	7	7.5	C1 4030 N3571	110	130	14	15	C1 B020 N3571
45	55	7	7.5	C1 4035 N3571	120	135	10	11	C1 C015 N3571
46	56	7	7.5	C1 4046 N3571	120	140	14	15	C1 C020 N3571
47	57	7	7.5	C1 4055 N3571	125	140	10	11	C1 C035 N3571
48	58	7	7.5	C1 4060 N3571	125	145	12	13	C1 C037 N3571
50	58	8	8.5	C1 5005 N3571	130	145	10	11	C1 D015 N3571
50	60	7	7.5	C1 5010 N3571	135	150	10	11	C1 D035 N3571
50	63	8.5	9.5	C1 5015 N3571	140	160	14	15	C1 E015 N3571
50	66	11	12	C1 5020 N3571	145	165	13	14	C1 E050 N3571
54	64	7	7.5	C1 5035 N3571	150	170	14	15	C1 F020 N3571
55	65	7	7.5	C1 5040 N3571	155	170	10	11	C1 F053 N3571

Further sizes on request.

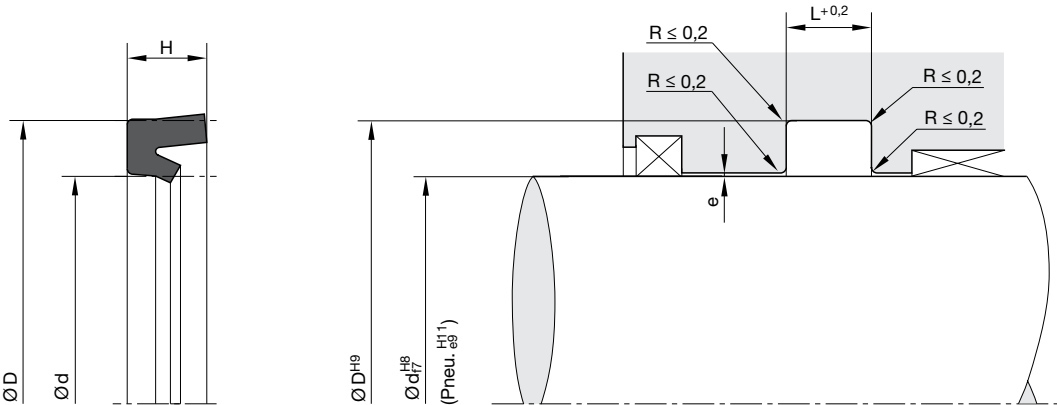

„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code
160	180	14	15	C1 G015 N3571
170	190	14	15	C1 H007 N3571
170	194	15	16	C1 H010 N3571
180	200	14	15	C1 J005 N3571
190	210	14	15	C1 K010 N3571
200	220	14	15	C1 L015 N3571
200	230	15	16	C1 L025 N3571
225	250	14	15	C1 M020 N3571
235	265	21	22	C1 M030 N3571
240	270	20	21	C1 N035 N3571
260	290	21	22	C1 O010 N3571
280	310	20	21	C1 O031 N3571
320	350	20	21	C1 Q050 N3571

Further sizes on request.



The GS Ultrathan® rod seal is a U-ring with interference fit on the outer diameter. It has been developed specifically for the exacting requirements of gas spring applications, which in addition to small grooves are long service life and maximum gas tightness. The short seal contact area ensures minimum friction. In addition to gas spring applications, these properties make this seal suitable for use in hydraulic and pneumatic equipment with identical requirements profiles.

- Good wear resistance.
- Easy installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.

Range of Application

The GS rod seal is particularly well suited for gas springs, piston rods, spindles and valve lifters as well as for slow-running rotary distributors ($v \leq 0.2 \text{ m/s}$).

Operating pressure	$\leq 200 \text{ bar}^{1)}$
Hydraulics	$\leq 200 \text{ bar}$
Gas springs	$\leq 200 \text{ bar}$
Rotary transmissions	$\leq 20 \text{ bar}$
Operating temperature	$-35 \text{ °C to } +90 \text{ °C}$
Sliding speed	
Hydraulics	$\leq 1 \text{ m/s}$
Gas springs	$\leq 1 \text{ m/s}$
Rotary transmissions	$\leq 0.2 \text{ m/s}$

Recommendation for rotary transmissions: $P \times v \leq 3$
(For definition see catalogue „Hydraulic Seals“, chapter „Rotary Seals“, introduction).

¹⁾ Dependent upon cross-section and compound.

Compounds

Standard: P5008, TPU ($\approx 94 \text{ Shore A}$).

For high pressures ($> 200 \text{ bar}$): P6000, TPU ($\approx 94 \text{ Shore A}$).

For low temperatures ($> 55 \text{ °C}$): P5009, TPU ($\approx 93 \text{ Shore A}$).

For high temperatures ($< 120 \text{ °C}$): P4300, TPU ($\approx 92 \text{ Shore A}$).

Installation

Profile GS rod seals are manufactured with an oversized outer diameter, which results in the required secure press fit on the adhesion part. The sealing lip only achieves the required size during installation. GS rod seals can be easily snapped into the housing by deforming them in the shape of a kidney. When selecting the seal for a certain diameter the seal with the largest possible cross-section should be given preference.

In the case of nominal diameters $\leq 25 \text{ mm}$, depending on the seal's cross-section and position of the installation groove, an open housing is recommended.


For applications in gas springs as opposed to the general installation guidelines contained in our catalogues we recommend housings with improved surface requirements.

Dynamic sealing: $R_z < 0.5 \text{ }\mu\text{m}$

Static sealing: $R_z < 1.0 \text{ }\mu\text{m}$

Percentage of contact area: $t_p > 80 \text{ \%}$

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

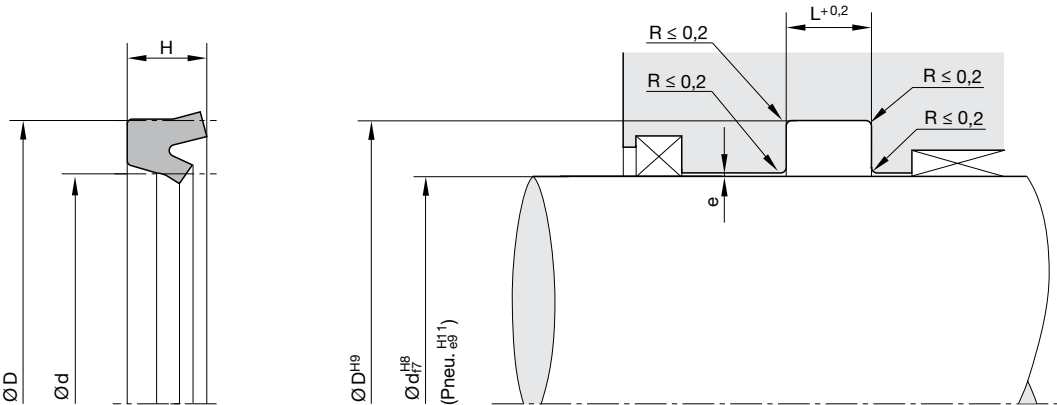

„e“ see chapter „Maximum gap allowance“.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code
3	6.5	3	3.5	GS 0306 P5008
4	8	3	3.5	GS 0408 P5008
5	9	2.6	3	GS 0509 P5008
6	10	3	3.5	GS 0610 P5008
8	14	4	4.5	GS 0814 P5008
10	16	4	4.5	GS 1016 P5008
12	20	5.5	6	GS 1220 P5008
14	22	5.5	6	GS 1422 P5008
16	22	5	5.5	GS 1622 P5008
20	28	5.5	6	GS 2028 P5008

Further sizes on request.



The EU self-retaining Ultrathan® seal/wiper performs two functions: sealing and wiping. The Ultrathan® material is characterized by extremely high wear resistance.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- No risk of corrosion since the combined retainer and wiper part eliminates the need for additional wire circlips.
- Long service life due to coordinated geometries of the functional lips and compound selection.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Excellent media resistance in case of suitable compound selection.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Installation in open housings.
- Low compression set.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

For piston rods in pneumatic cylinders.

Operating pressure	≤ 16 bar
Operating temperature	-35 °C to +80 °C ¹⁾
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

¹⁾ For higher temperatures, see profile E9.

Compounds

Standard: P5008, Ultrathan® (TPU) Compound (≈ 94 Shore A).
For low temperatures: P5009, Ultrathan® (TPU) Compound (≈ 94 Shore A).

Installation


The profile EU rod seal wiper is pushed into the housing with a circlip recess conforming to DIN 7993 (type B) and retained by the easy-to-snap in retainer ridge.

During assembly, care should be taken that neither the wiper nor the sealing lip be damaged by being pushed over any sharp edges.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper

EU

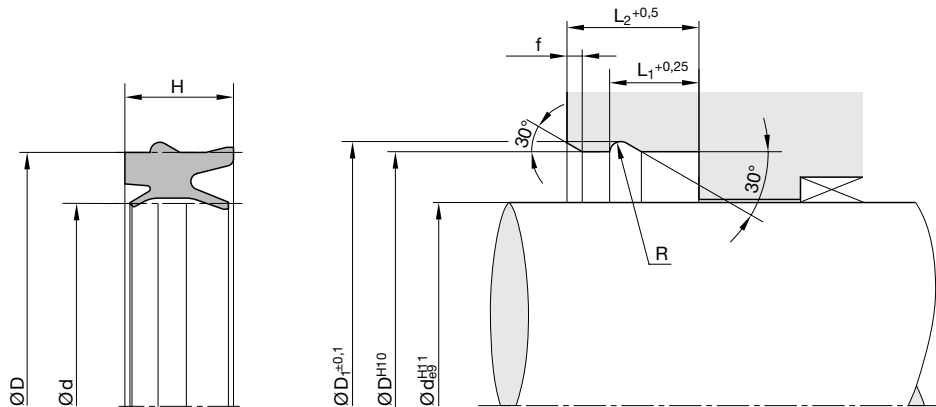

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L ₁	L ₂	R	f	Order code
12	19	10	21	7.7	12	1	1.5	EU 1219 P5008
12	20	10.7	22	8.8	13	1.1	1.5	EU 1205 P5008
12	22	10.7	24	8.8	13	1.1	1.5	EU 1222 P5008
14	24	10.7	26	8.8	13	1.1	1.5	EU 1424 P5008
16	26	10.7	28	8.8	13	1.1	1.5	EU 1626 P5008
18	26	10.7	28	8.8	13	1.1	1.5	EU 1826 P5008
18	28	10.7	30	8.8	13	1.1	1.5	EU 1828 P5008
20	30	10.7	32	8.8	13	1.1	1.5	EU 2029 P5008
22	32	11.2	34.5	9.4	14	1.4	2	EU 2205 P5008
25	35	11.2	37.5	9.4	14	1.4	2	EU 2535 P5008
30	40	11.2	42.5	9.4	14	1.4	2	EU 3040 P5008
32	42	11.2	44.5	9.4	14	1.4	2	EU 3242 P5008
40	50	11.2	52.5	9.4	14	1.4	2	EU 4050 P5008
45	55	12.2	58.2	10.4	15	1.8	2	EU 4555 P5008
50	60	12.2	63.2	10.4	15	1.8	2	EU 5060 P5008
63	75	13	78.2	11.4	16	1.8	2	EU 6375 P5008

Further sizes on request.



The self-retaining Ultrathan® EN rod seal/wiper ring for piston rods of pneumatic cylinders performs two functions: sealing and wiping.

The Ultrathan® compound is characterized by extremely high wear resistance.

The dirt shield formed at the wiper prevents moisture from migrating underneath the seal into the groove. As a result, corrosion which frequently occurs inside the groove can be avoided. In addition, due to the absence of undercuts and dead spaces, the assembly space in front of the seal is easy to clean. This makes the EN seal/wiper ring particularly well suited for food and pharmaceutical production and for all other applications requiring easy-to-clean components.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- No risk of corrosion since the combined retainer and wiper part eliminates the need for additional wire circlips.
- Long service life due to coordinated geometries of the functional lips and compound selection.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the food processing industry.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Installation in open housings.
- Low compression set.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.
- Product geometry prevents dirt deposits at the front face of the cylinder.

Range of Application

The EN rod seal/wiper has been developed for hygienically sensitive applications, such as clean room technology, medical device technology, pharmaceuticals and food applications.

Operating pressure	≤ 16 bar
Operating temperature	-20 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds


Standard: P5000, Ultrathan® (TPU)-Compound (≈ 94 Shore A); (approvals: FDA 21 CFR 177.2600).

For specialty applications, special-purpose TPU compounds are available.

Installation

The EN profile seal-wiper ring is pushed in by means of a recess for a round wire circlip according to DIN 7993 (type B) and fixed in position by the retaining element that easily snaps in. During installation care should be taken not to push the wiper or the seal lips across sharp edges that would cause them to be damaged.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

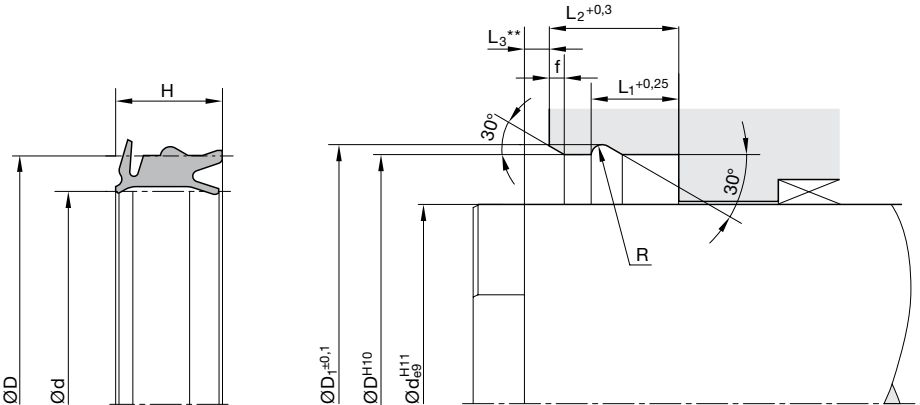

** Distance between front housing and beginning width across flats

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L ₁	L ₂	L ₃	R	f	Order code
12	22	14.2	24	8.8	13	2.5	1.1	1.5	EN 1222 P5000*
16	26	14.2	28	8.8	13	2.5	1.1	1.5	EN 1626 P5000
20	30	14.2	32	8.8	13	2.5	1.1	1.5	EN 2029 P5000
25	35	15.2	37.5	9.4	14	2.5	1.4	2	EN 2535 P5000

* Moulds not available on the date of printing.
Further sizes on request.



The self-retaining E7 rod seal/wiper is a version of the profil EU for extreme working conditions with regard to temperature and chemical resistance and dry running.

It performs three functions simultaneously:

Sealing, wiping, fixing.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- No risk of corrosion since the combined retainer and wiper part eliminates the need for additional wire circlips.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Easy snap assembly without assembly aids.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.

Range of Application

Operating pressure ≤ 16 bar

Operating temperature

E7 Z4017 $-30\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$

E7 Z4016 $-35\text{ }^{\circ}\text{C}$ to $+200\text{ }^{\circ}\text{C}$

Sliding speed

E7 Z4017 ≤ 4 m/s

E7 Z4016 ≤ 10 m/s

Media

Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds


Standard: Z4017 (Polon® PS006, UHMW-PE, conform to FDA). For higher temperatures and/or chemical resistance requirements (but with slightly reduced service life): Z4016 (Polon® 074, PTFE + 10 % carbon fibre).

Installation

The rod seal/wiper E7 is pushed into the housing with a circlip recess conforming to DIN 7993 (type B) and retained by the easy-to-snap in retainer ridge.

During assembly, care should be taken that neither the wiper nor the sealing lips be damaged by being pushed over any sharp edges.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

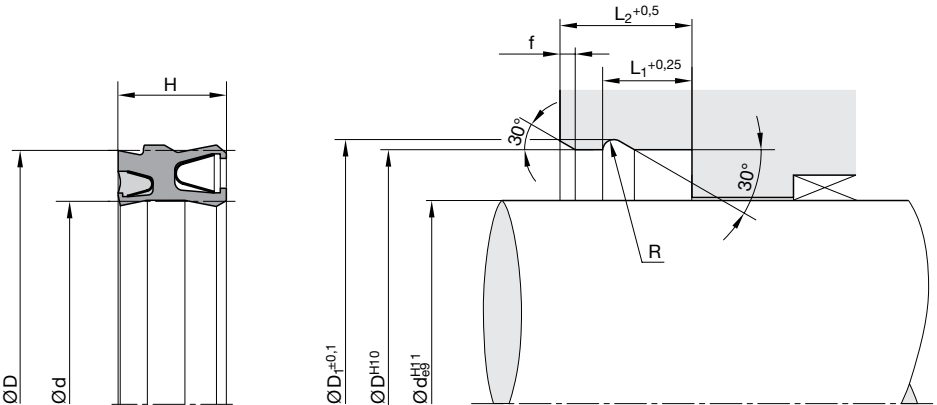

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L ₁	L ₂	R	f	Order code
10	18	10.7	20	8.8	13	1.1	1.5	E7 1018 Z4017
12	20	10.7	22	8.8	13	1.1	1.5	E7 1205 Z4017
12	22	10.7	24	8.8	13	1.1	1.5	E7 1222 Z4017
16	26	10.7	28	8.8	13	1.1	1.5	E7 1626 Z4017
20	30	10.7	32	8.8	13	1.1	1.5	E7 2029 Z4017
25	35	11.2	37.5	9.4	14	1.4	2	E7 2535 Z4017
32	42	11.2	44.5	9.4	14	1.4	2	E7 3242 Z4017
40	50	11.2	52.5	9.4	14	1.4	2	E7 4050 Z4017
45	55	12.2	58.2	10.4	15	1.8	2	E7 4555 Z4017

Further sizes on request.



The self-retaining pneumatic rod seal/wiper set profile E8 for piston rods in pneumatic cylinders combines three functions: Sealing, wiping, fixing.

The split design of the sealing set allows optimal adaptation of the materials to the requirements of the individual component (wiper and/or seal).

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Good wear resistance.
- No risk of corrosion since the combined retainer and wiper part eliminates the need for additional wire circlips.
- Long service life due to coordinated geometries of the functional lips and compound selection.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Installation in open housings.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-20 °C to +80 °C ¹⁾
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

¹⁾ For higher temperatures, see profile E9.

Compounds

The sealing part of the profile E8 pneumatic rod seal/wiper is made of a special SFR® elastomer N3580 (NBR-based) with a hardness of approx. 80 Shore A.

This compound has excellent running properties, especially in the semi-frictional area.

The profile EA fixing/scraping part is made of the highly wear resistant W5035 plastic material.

Installation


The pneumatic profile E8 rod seal/wiper set is fitted into the housing by means of a circlip recess according to DIN 7993 (type B). The sealing part is pushed in and fixed by the EA retainer/wiper, which snaps in easily. During assembly, care should be taken to ensure that neither the scraper nor the sealing lips be damaged by sharp edges.

In case the seal/wiper set needs to be exchanged, this can be accomplished without removing the piston rod if a dismantling recess has been provided for.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper set

E8

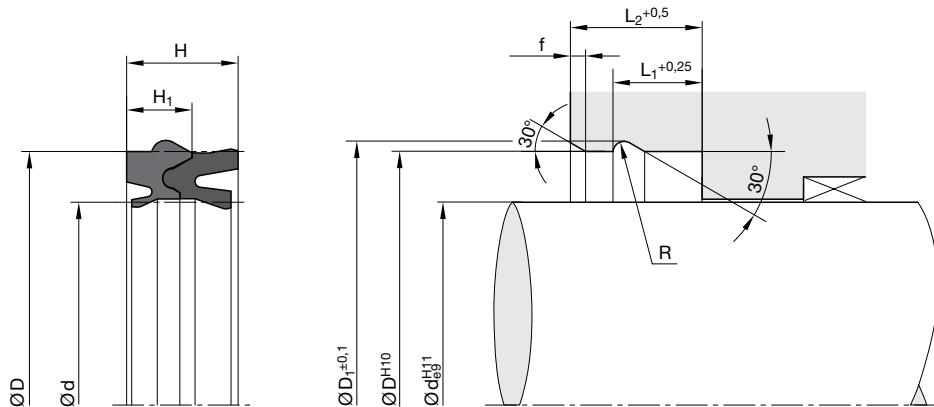

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	H ₁	D ₁	L ₁	L ₂	R	f	Order code
12	19	10	5.9	21	8	12.3	1.1	1.5	E8 0009 00606
12	20	10.3	5.5	22	8.8	13	1.1	1.5	E8 0011 00606
12	22	11	5.5	24	8.8	13	1.1	1.5	E8 0012 00606
14	24	11	5.5	26	8.8	13	1.1	1.5	E8 0014 00606
16	26	11	5.5	28	8.8	13	1.1	1.5	E8 0016 00606
18	28	11	5.5	30	8.8	13	1.1	1.5	E8 0018 00606
18	26	11	5.5	28	8.8	13	1.1	1.5	E8 0036 00606
20	30	11	5.5	32	8.8	13	1.1	1.5	E8 0020 00606
22	32	11.5	6.45	34.5	9.4	14	1.4	2	E8 0022 00606
25	35	11.5	6.45	37.5	9.4	14	1.4	2	E8 0025 00606
28	38	11.5	6.45	40.5	9.4	14	1.4	2	E8 0028 00606
30	40	11.5	6.45	42.5	9.4	14	1.4	2	E8 0030 00606
32	42	11.5	6.45	44.5	9.4	14	1.4	2	E8 0032 00606
35	45	11.5	6.45	47.5	9.4	14	1.4	2	E8 0035 00606
40	50	11.5	6.45	52.5	9.4	14	1.4	2	E8 0040 00606
45	55	12.5	7.45	58.2	10.4	15	1.8	2	E8 0045 00606
50	60	12.5	7.45	63.2	10.4	15	1.8	2	E8 0050 00606
63	75	13	7.45	78.2	11.4	16	1.8	2	E8 0063 00606

Further sizes on request.



The E9 pneumatic seal/wiper ring for pneumatic cylinder piston rods is the high-temperature version of the profiles E8 and EU.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Good wear resistance.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Installation in closed and undercut housings.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

Mainly used for pneumatic cylinders.

Operating pressure	≤ 16 bar
Operating temperature	-10 °C to +150 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard compound is a special FKM-based elastomer with a Shore hardness of approx. 81 A and a vulcanized metal disc (circlip according DIN 7993 type B).

Installation

The pneumatic profile E9 rod seal/wiper set is fitted into the housing by means of a circlip recess according to DIN 7993 (type B). The sealing part is pushed in and fixed by the circlip. Damage to the scraper and the sealing lips by sharp edges must be prevented during assembly.


In case the seal/wiper set needs to be exchanged, this can be accomplished without removing the piston rod if a dismantling recess has been provided for (detail "X").

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper set

E9


Detail "X"

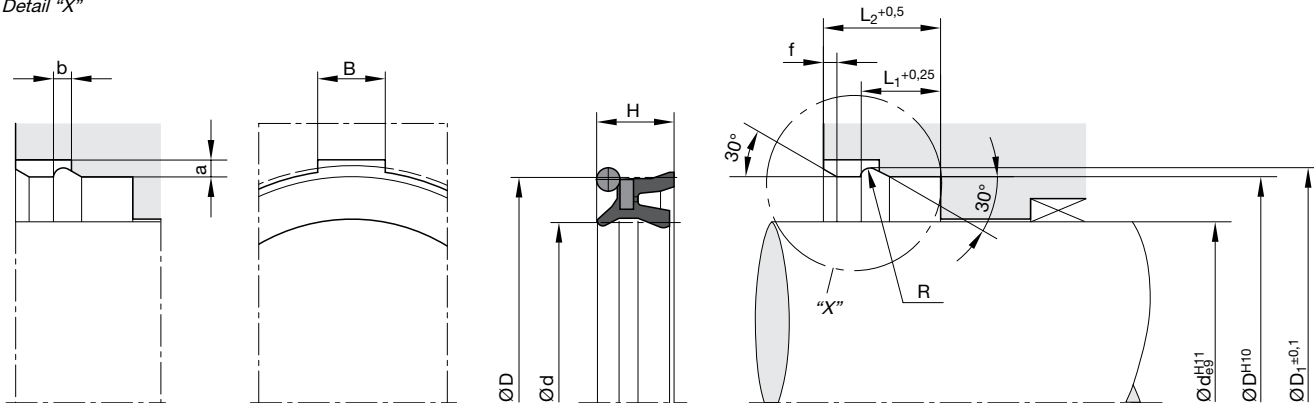

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L ₁	L ₂	R	a	b	B	f	Order code
12	20	8.5	22	8.8	13	1.1	1.8	2.2	4	1.5	E9 9011 00606
12	22	8.5	24	8.8	13	1.1	1.8	2.2	4	1.5	E9 9012 00606
16	26	8.5	28	8.8	13	1.1	1.8	2.2	5	1.5	E9 9016 00606
18	28	8.5	30	8.8	13	1.1	1.8	2.2	5	1.5	E9 9018 00606
20	30	8.5	32	8.8	13	1.1	1.8	2.2	5	1.5	E9 9020 00606
22	32	8.5	34.5	9.4	14	1.4	2	2.8	7.5	2	E9 9022 00606
25	35	8.5	37.5	9.4	14	1.4	2	2.8	7.5	2	E9 9025 00606
32	42	8.5	44.5	9.4	14	1.4	2	2.8	7.5	2	E9 9032 00606
40	50	8.5	52.5	9.4	14	1.4	2	2.8	7.5	2	E9 9040 00606
50	60	8.5	63.2	10.4	15	1.8	2.5	3.6	10	2	E9 9050 00606
63	75	10	78.2	11.4	16	1.8	2.5	3.6	10	2	E9 9063 00606

Further sizes on request.

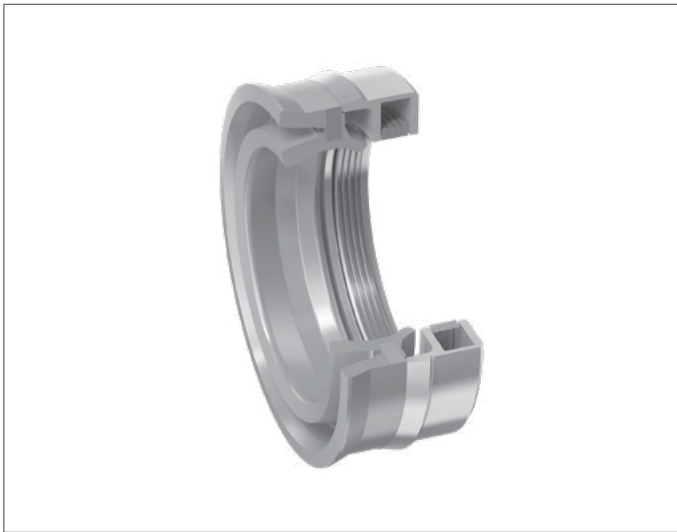

The self-retaining EW seal/wiper combines the properties of the proven E9 high-temperature seal with a metallic wiper for particularly dirt-prone and harsh environments.

Thus, the EW seal/wiper provides a scraper function in addition to the sealing function. It is used for scraping strongly adhering particles off the cylinder rod, thereby protecting the seal against excessive wear. The combination of the metallic wiper and wear-resistant sealing compound achieves considerably longer service life.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Good wear resistance.
- Robust seal profile for harshest operating conditions.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Easy snap assembly with assembly aids.

Range of Application

The seal/wiper EW is suitable for use in environments that are particularly prone to dirt and in high temperatures, such as crust breaker cylinders, which are used in aluminum production.

Operating pressure	≤ 16 bar
Operating temperature	-10 °C to +150 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

The sealing element of the EW seal-wiper set consists of an FKM-based special elastomer with a hardness of approx. 81 Shore A. It is combined with a lamella wiper made of metal. For low temperatures NBR compound versions are available on request as well.


Installation

The EW seal-wiper set is installed in the seating hole with a recess for round wire circlips according to DIN 7993 (type B). The seal-wiper element is pushed in and fixed in position by the metal wiper set that easily snaps in. During installation care should be taken not to push the wiper or the seal lip across sharp edges that would cause them to be damaged.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper set

EW

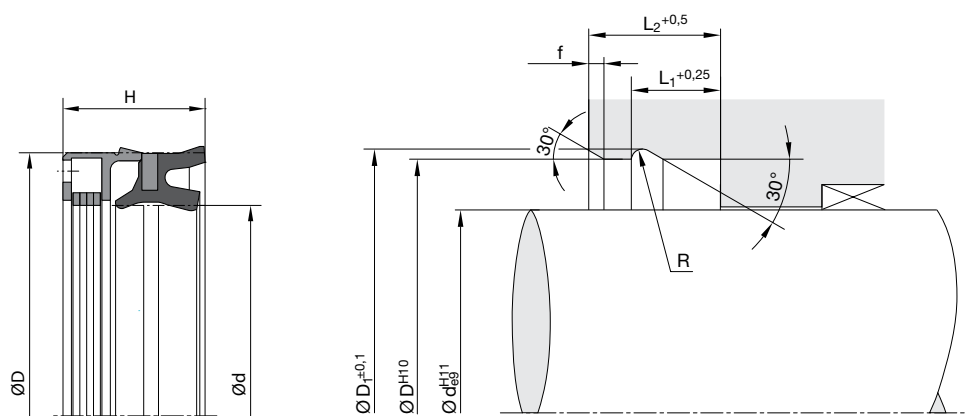

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L ₁	L ₂	R	f	Order code
16	26	13.5	28	8.8	13	1.1	1.5	EW 1626 02001
20	30	13.5	32	8.8	13	1.1	1.5	EW 2030 02001
25	35	13.9	37.5	9.4	14	1.4	2	EW 2535 02001
50	60	14.6	63.2	10.4	15	1.8	2	EW 5060 02001

Further sizes on request.



The EL pneumatic seal/wiper ring is a proven combination element for sealing piston rods in compact pneumatic cylinders and valve lifters.

The EL product series is available in both Ultrathan® and rubber versions. The Ultrathan® versions are characterized by extremely high wear resistance.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Extreme wear resistance.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Excellent media resistance in case of suitable compound selection.
- Short axial assembly length.
- Installation in closed and undercut housings.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

Pneumatic cylinders

Operating pressure

EL NBR N3582 ≤ 10 bar

EL TPU P5008 ≤ 16 bar

Operating temperature

EL NBR N3582 -10 °C to +80 °C

EL TPU P5008 -35 °C to +80 °C

Sliding speed ≤ 1 m/s

Media Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: N3582, a special NBR-based SFR® elastomer (≈ 85 Shore A). This compound offers excellent running properties, especially in the semi-frictional area.

For low temperatures: N8613, NBR compound (≈ 80 Shore A).

For high temperatures: V3839, FKM compound (≈ 90 Shore A).

Standard: P5008, PUR compound (≈ 94 Shore A).

For low temperatures: P5009, PUR compound (≈ 94 Shore A).

Installation


The selfretaining profile EL pneumatic and seal/wiper is easily snapped into the groove before the piston is assembled into the cylinder.

Care should be taken that the sealing and the wiper lips are not damaged by sharp edges during installation. Initial lubrication on assembly is important for very long service life.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper

EL

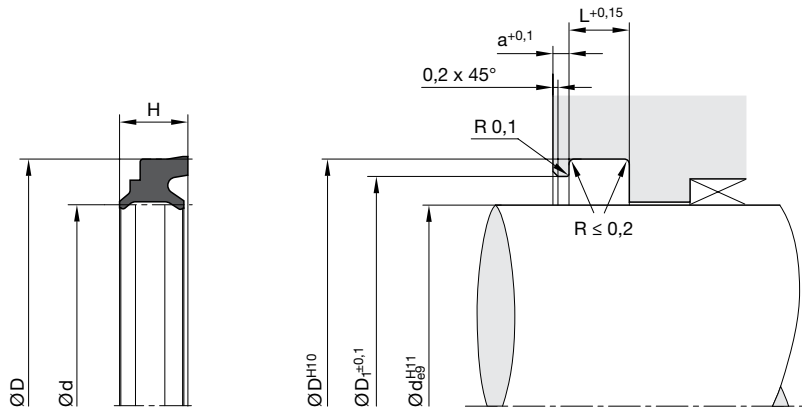

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L	a	Order code
EL NBR N3582						
4	8.2	4	6.7	3	0.8	EL 0040 N3582
6	11.2	5	9.1	3.6	1	EL 0058 N3582
8	14.2	5	12.1	3.6	1	EL 0082 N3582
10	16.2	6	14.1	4.2	1.2	EL 1016 N3582
12	18.2	6	15.5	4.2	1.2	EL 1018 N3582
16	23	6	18.8	4.2	1.2	EL 1060 N3582
EL TPU P5008						
4	8.2	4	6.7	3	0.8	EL 0040 P5008
6	11.2	5	9.1	3.6	1	EL 0058 P5008
8	14.2	5	12.1	3.6	1	EL 0082 P5008
10	16.2	6	14.1	4.2	1.2	EL 1016 P5008
10	18	7.9	14.2	5.9	1.2	EL 1017 P5008

Further sizes on request.



The EM rod seal/wiper ring for pneumatic applications is a proven combination element for sealing piston rods in compact pneumatic cylinders and valve lifters. The special design using a wear-resistant Ultrathan® compound enables installation in smallest grooves for extremely low break-away and dynamic friction.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Extreme wear resistance.
- Low static and dynamic friction thanks to miniaturized design.
- Smooth running due to optimum adjustment of the functional lips.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Excellent media resistance in case of suitable compound selection.
- Short axial assembly length.
- Short radial assembly depth.
- Installation in closed and undercut housings.
- Low compression set.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

Rod seal/wiper for mini-pneumatics.

Operating pressure	≤ 16 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: P5010, Ultrathan® (TPU) compound (≈ 90 Shore A).
For low temperatures: P5009, Ultrathan® (TPU) compound (≈ 94 Shore A).

For high temperatures: V3839, FKM compound (≈ 90 Shore A).


Installation

The self-retaining rod seal/wiper profile EM is manually or automatically snapped into the installation housing while the piston rod is disassembled. Care is to be taken to prevent sharp edges from damaging the wiping and sealing lips during assembly. Initial lubrication is the prerequisite for very long operational life.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper

EM

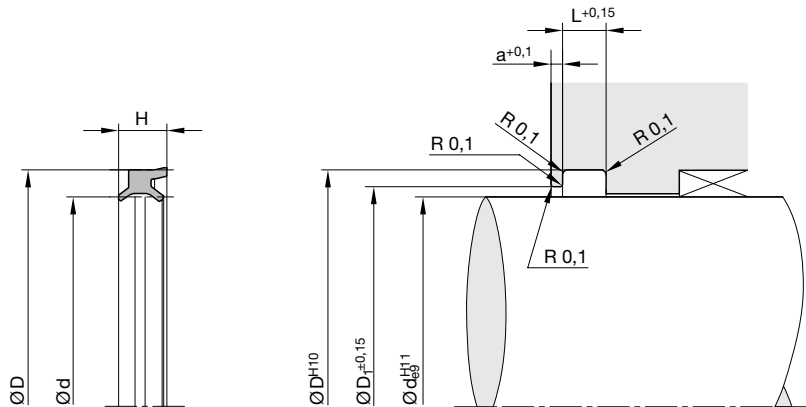

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	D ₁	L	a	Order code
3	5.6	2.8	4.6	2.7	0.6	EM 0302 P5010
4	7	2.8	5.6	2.7	0.8	EM 0407 P5010
5	8	2.8	6.4	2.7	0.8	EM 0508 P5010
6	9	2.8	7.5	2.7	1	EM 0609 P5010
8	11.5	3.2	9.6	3	1	EM 0811 P5010
10	14	3.7	11.9	3.4	1	EM 1014 P5010
12	16.5	4	14.2	3.7	1.2	EM 1214 P5010
14	18.5	4	16	3.7	1.2	EM 1418 P5010
16	20.5	4	18.2	3.7	1.2	EM 1620 P5010
18	22.5	4	20.1	3.7	1.2	EM 1822 P5010
20	25	4.6	22.5	4.15	1.2	EM 2025 P5010
22	27	4.6	24.2	4.15	1.2	EM 2227 P5010
25	30	4.6	27.2	4.15	1.2	EM 2530 P5010
30	35.5	5	32.1	4.55	1.2	EM 3035 P5010
32	37.5	5	34.1	4.55	1.2	EM 3237 P5010

Further sizes on request.



The self-retaining ET Ultrathan® seal/wiper for flattened piston rods of non-rotating pneumatic cylinders is the oval counterpart of the round standard EU profile. It performs two functions: sealing and wiping.

The Ultrathan® material is characterized by extremely high wear resistance.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Extreme wear resistance.
- No risk of corrosion since the combined retainer and wiper part eliminates the need for additional wire circlips.
- Long service life due to coordinated geometries of the functional lips and compound selection.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Excellent media resistance in case of suitable compound selection.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Installation in open housings.
- Low compression set.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

For flattened rods of pneumatic cylinders protected against rotation.

Operating pressure	≤ 10 bar
Operating temperature	-35 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: P5008, Ultrathan® (TPU) Compound (≈ 94 Shore A).
For low temperatures: P5009, Ultrathan® (TPU) Compound (≈ 94 Shore A).


Installation

The profile ET rod seal/wiper is pushed into the housing with a circlip recess conforming to DIN 7993 (type B) and retained by the easy-to-snap in retainer ridge.

During assembly, care should be taken that neither the wiper nor the sealing lip be damaged by being pushed over any sharp edges.

The parallel surfaces of the guide sleeve and the seal must be accurately aligned with each other.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

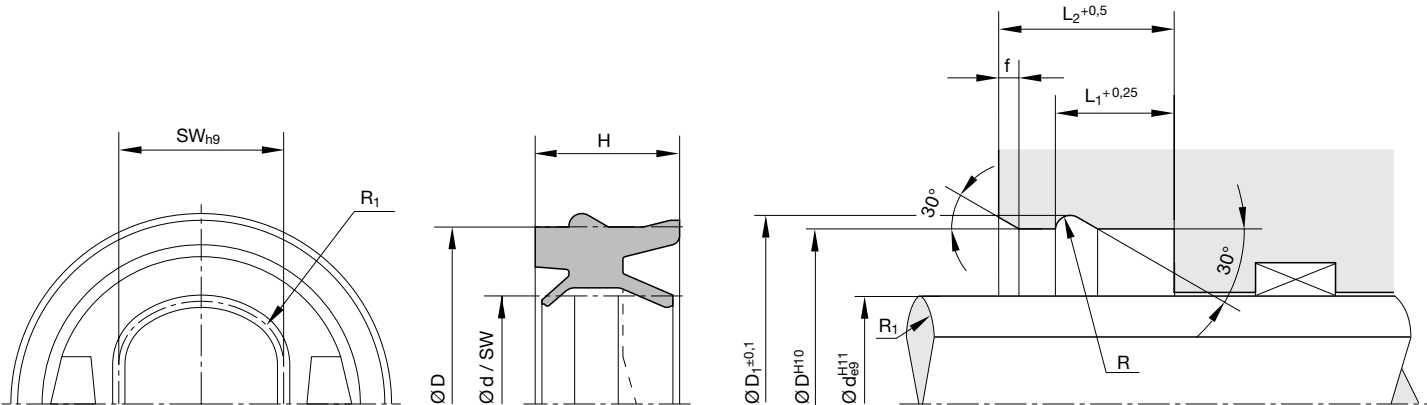

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	SW	D	H	d ₁	L ₁	L ₂	R	f	R ₁	Order code
12	10	22	10.7	24	8.8	13	1.1	1.5	0.7 - 1.3	ET 1222 P5008
16	13	26	10.7	28	8.8	13	1.1	1.5	3.0 - 4.0	ET 1626 P5008
20	17	30	10.7	32	8.8	13	1.1	1.5	4.0 - 5.0	ET 2030 P5008

Further sizes on request.



The EF Ultrathan® seal/wiper for flattened piston rods of non-rotating pneumatic cylinders is the oval counterpart of the round EL standard profile. It performs two functions: sealing and wiping. The Ultrathan® material is characterized by extremely high wear resistance.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Bi-functional element: seal and wiper.
- Extreme wear resistance.
- Long service life due to coordinated geometries of the functional lips and compound selection.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Excellent media resistance in case of suitable compound selection.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Identical housing for E7, E8, E9, EU, EN, EW and ET.
- Short axial assembly length.
- Installation in closed and undercut housings.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.

Range of Application

For flattened rods of pneumatic cylinders protected against rotation.

Operating pressure	≤ 10 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

P5010, Ultrathan® (TPU)-Compound (≈ 90 Shore A).

Installation


During assembly, care should be taken that neither the wiper nor the sealing lip be damaged by being pushed over any sharp edges.

The parallel surfaces of the guide sleeve and the seal must be accurately aligned with each other.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal/wiper

EF

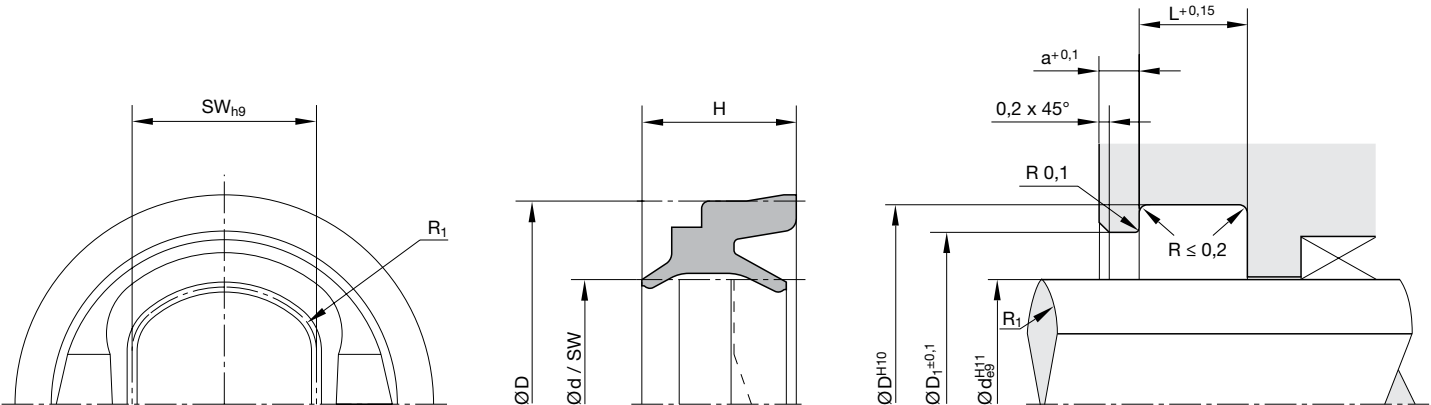

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	SW	D	H	d ₁	L	a	R	Order code
6	5	11.2	5	9.1	3.6	1	0.4 - 0.9	EF 0650 P5007
8	6	14.2	5	12.1	3.6	1	0.6 - 1.1	EF 0805 P5010
10	8	16.2	6	14.1	4.2	1.2	0.6 - 1.2	EF 1A39 P5010

Further sizes on request.



The EP pneumatic rod seal/wiper and guiding element for piston rods of pneumatic cylinders performs three functions: sealing, wiping and guiding. The Ultrathan® compound is characterized by extremely high wear resistance. The multi-component design of the EP profile with an aluminum cage enables very easy installation by axial press-fit into the cylinder head.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Multi-functional element: seal, wiper and guiding element.
- Extreme wear resistance.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Simple fabrication of the housing.
- Short radial assembly depth.
- Low compression set.
- The coordinated geometries of the seal and wiper lips achieve favourable friction coefficients and long service life.
- Multi-functionality provides warehousing cost benefits.

Range of Application

Pneumatic cylinders

Operating pressure	≤ 16 bar
Operating temperature	-35 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

The profile EP pneumatic rod seal, wiper and guidance system is made of a polyurethane compound (Ultrathan® P5008) which we process in-house to ensure consistent quality.

The advantages of this compound are the high resistance to wear, the excellent compression set and the extended temperature range in comparison to conventional polyurethane compounds. The supporting / reinforcement part is made of an aluminum alloy chemically bonded to the polyurethane compound. Reinforcement parts made of other materials are available on request.


Installation

Profile EP is pressed into the bore and retained by a press fit between cylinder housing and an aluminum ring. Care should be taken that neither the scraper nor the sealing lips are damaged by sharp edges during installation. When pressing the sealing element into the groove, pressure should only be put upon the metal part. During a normal cylinder life span, replacement is not necessary. However, disassembly is possible after dismounting the cylinder head and forcing out the seal.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Rod seal, wiper and guiding element

EP

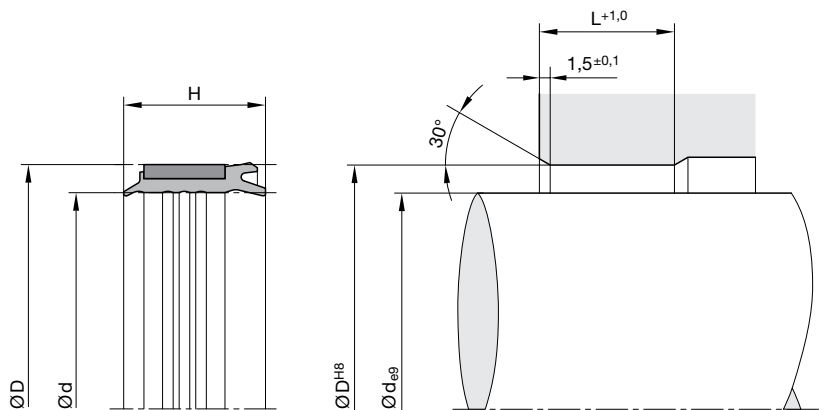

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	Order code
8	15	17.5	15	EP 0815 Z5074
10	17	20.5	18	EP 1017 Z5074
12	19	22.5	19.5	EP 1219 Z5074
14	21	23.5	20.5	EP 1421 Z5074
16	25	25.5	21.5	EP 1625 Z5074
18	27	28.5	23.5	EP 1827 Z5074
20	29	30.5	26.5	EP 2029 Z5074
22	31	30.5	26.5	EP 2231 Z5074
25	35	35.5	31.5	EP 2535 Z5074
30	41	41	37	EP 3041 Z5074
32	43	41	37	EP 3243 Z5074
35	46	41	37	EP 3546 Z5074
40	51	43	39	EP 4051 Z5074







Further sizes on request.





Piston seals

Profile cross-section	Profile reference	Page
-----------------------	-------------------	------



Piston seals, single-acting

	E4 (NBR)	62
	E4 (TPU)	64
	Z7	66
	Z8 (NBR)	68
	Z8 (TPU)	70
	C2	72
	MK	75

Piston seals, double-acting




	Z5	77
	PZ	79
	OA	81

Complete pistons, single-acting

	EK	85
	DE	87

Profile cross-section	Profile reference	Page
-----------------------	-------------------	------

Complete pistons, double-acting

	DK (NBR)	89
	DK (TPU)	89
	DP	92
	DR	94



The E4 piston seal is a lip seal specifically developed for use in pneumatics. The dimensions of the standard series correspond to the cylinder diameters according to ISO 3320, CETOP RP 52 P, RP 43 P and RP 53 P.

The E4 piston seal is available in both Ultrathan® and rubber compounds. The Ultrathan® versions are extremely resistant against wear and pressure peaks.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Suitable for cylinders with dead-center cushioning.
- Good wear resistance.
- Long service life thanks to application-optimized compounds.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- Suitable for fully automatic installation.
- Assembly on one-part piston is possible.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed housings.
- Special seal geometry ensures optimal function even in case of flow-controlled exhaust air.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: N3578, NBR compound (≈ 75 Shore A).

For low temperatures: N8613, NBR compound (≈ 80 Shore A).

For high temperatures: V3664, FKM compound (≈ 85 Shore A).

Installation

The profile E4 lip seals are simply pulled over the piston into the groove. To avoid damaging the seal lips during installation, sharp edges should be removed from the piston and the cylinder tube.


Under oil-free conditions it is important to obtain a solid lubrication film inside the cylinder tube. This must be achieved before assembly to ensure a long service life of the seal.

For piston guidance we recommend the profile F2 piston guidance tape. Please refer to our profile F2 for details of the piston outside diameter and the gap measurements.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Piston seal

E4 (NBR)

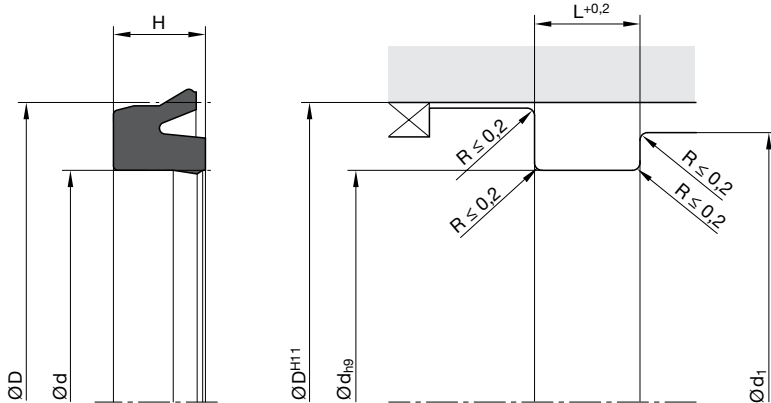

d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	d_1	Order code	D	d	H	L	d_1	Order code
10	5	3	3.5	9	E4 1050 N3578	110	98	8.5	9.5	108	E4 B002 N3578
12	6	4	4.5	11	E4 1206 N3578	120	105	10	11	117.5	E4 C005 N3578
12	7	4	4.5	11	E4 1207 N3578	125	110	10	11	122.5	E4 C010 N3578
14	8	4	4.5	13	E4 1408 N3578	130	115	10	11	127.5	E4 D015 N3578
16	8	5.5	6	15	E4 1608 N3578	140	125	10	11	137.5	E4 E040 N3578
16	9	5	5.5	15	E4 1609 N3578	150	135	10	11	147.5	E4 F004 N3578
16	10	4	4.5	15	E4 1610 N3578	160	140	14	15	155	E4 G014 N3578
20	12	5.5	6	19	E4 2012 N3578	160	145	10	11	157.5	E4 G022 N3578
20	14	4	4.5	19	E4 2014 N3578	180	160	14	15	175	E4 J014 N3578
20.5	14	4	4.5	19.5	E4 2016 N3578	200	180	14	15	195	E4 L018 N3578
22	16	5	5.5	21	E4 2216 N3578	220	199	15	16	215	E4 M005 N3578
24	16	5.5	6	23	E4 2416 N3578	250	225	18	19	242.5	E4 N525 N3578
25	15.5	5.8	6.3	24	E4 2515 N3578	250	226	16	17	242.5	E4 N502 N3578
25	17	4.5	5	24	E4 2516 N3578	250	230	14	15	245	E4 N503 N3578
25	17	5.5	6	24	E4 2517 N3578	320	295	14	15	312.5	E4 Q205 N3578
28	18	7	7.5	26.5	E4 2818 N3578	320	295	17	18	312.5	E4 Q206 N3578
32	20	6.5	7	30	E4 3220 N3578						
32	22	7	7.5	30.5	E4 3222 N3578						
32	24	5.5	6	31	E4 3224 N3578						
34	24	7	7.5	32.5	E4 3424 N3578						
36	26	7	7.5	34.5	E4 3666 N3578						
40	30	7	7.5	38.5	E4 4030 N3578						
42	30	6	6.5	40	E4 4203 N3578						
45	33	9	10	43	E4 4533 N3578						
45	37	7	7.5	44	E4 4537 N3580						
50	40	7	7.5	48.5	E4 5040 N3578						
60	50	7	7.5	58.5	E4 6022 N3578						
63	53	7	7.5	61.5	E4 6353 N3578						
65	55	7	7.5	63.5	E4 6510 N3578						
70	58	7	7.5	68	E4 7058 N3578						
75	65	7.5	8	73.5	E4 7065 N3578						
80	68	8.5	9.5	78	E4 8068 N3578						
100	88	8.5	9.5	98	E4 A088 N3578						
105	93	8.5	9.5	103	E4 A501 N3578						

Further sizes on request.



The profile E4 piston seal is a lip seal specially developed for use in pneumatics. The dimensions of the profile E4 standard series correspond to the cylinder diameters according to ISO 3320, CETOP RP 52 P, RP 43 P and RP 53 P. Profile E4 is fully interchangeable with the profile C2 standard series formerly used in pneumatics.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Suitable for cylinders with dead-center cushioning.
- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Long service life thanks to application-optimized compounds.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- Suitable for fully automatic installation.
- Assembly on one-part piston is possible.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed housings.
- Low compression set.
- Pressure relief grooves at the back of the seal ensure optimal function even in case of flow-controlled exhaust air.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-35 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: P5007, Ultrathan® (TPU) compound (≈ 82 Shore A).
For low temperatures: P5075, Ultrathan® (TPU) compound (≈ 80 Shore A).

Installation

The profile E4 lip seals are simply pulled over the piston into the groove. To avoid damaging the seal lips during installation, sharp edges should be removed from the piston and the cylinder tube.


Under oil-free conditions it is important to obtain a solid lubrication film inside the cylinder tube. This must be achieved before assembly to ensure a long service life of the seal.

For piston guidance we recommend the profile F2 piston guidance tape. Please refer to our profile F2 for details of the piston outside diameter and the gap measurements.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Piston seal

E4 (TPU)

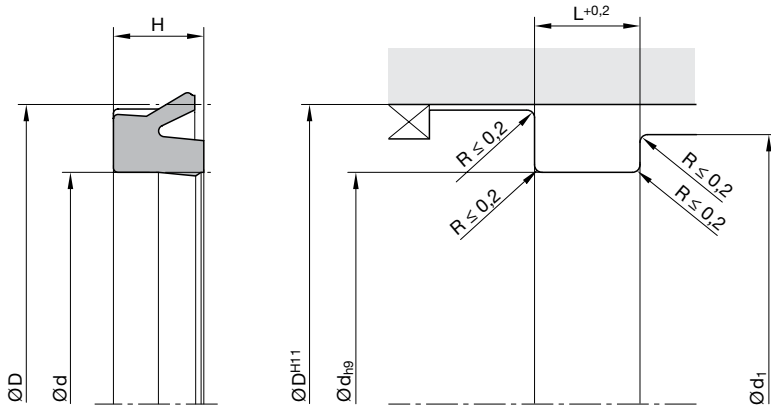

d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	d_1	Order code
20.5	14	4	4.5	19.5	E4 2016 P5007
25	17	5.5	6	24	E4 2517 P5007
32	24	5.5	6	31	E4 3224 P5007
40	30	7	7.5	38.5	E4 4030 P5007
50	40	7	7.5	48.5	E4 5040 P5007
63	53	7	7.5	61.5	E4 6353 P5007
80	68	8.5	9.5	78	E4 8068 P5007
100	88	8.5	9.5	98	E4 A088 P5007
125	110	10	11	122.5	E4 C010 P5007
160	145	10	11	157.5	E4 G022 P5007
200	180	14	15	195	E4 L018 P5007

Further sizes on request.



The Z7 pneumatic piston seal is an U-ring with an integral guiding surface for single-acting pistons, ensuring high sealing performance due to the seal lip design.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Multi-functional sealing element. The guiding area at the sealing element performs the guiding function in the cylinder. However, due to its geometry the sealing element is not suitable for absorption of high radial forces or long strokes.
- Prevents metallic contact between the piston and cylinder. Ideal for light-metal and plastic cylinders (ridging).
- Good wear resistance.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- Assembly on one-part piston is possible.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Installation in open housings with retaining collar.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds


Standard: N3578, NBR Compound (≈ 75 Shore A).
 For low temperatures: N8602, NBR Compound (≈ 70 Shore A).
 For high temperatures: V3681, FKM Compound (≈ 80 Shore A).

Installation

The profile Z7 pneumatic cylinder seals can be easily mounted by pulling them over the one-piece piston.

Care should be taken that all edges are chamfered to avoid seal damage.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

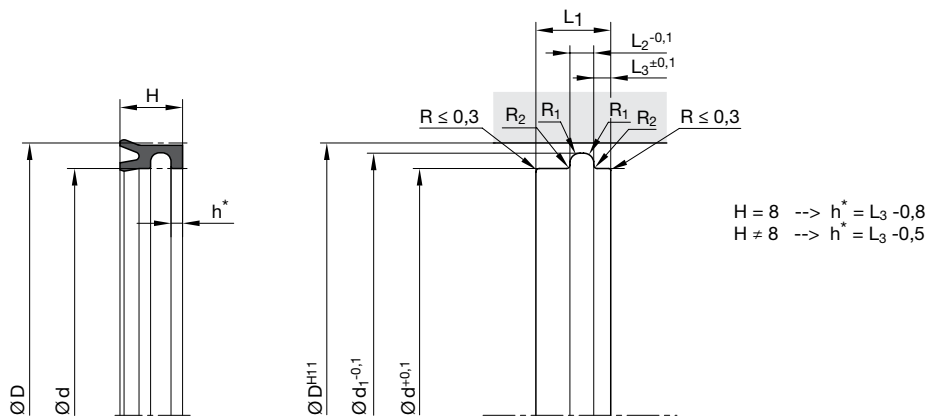

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	d ₁	L ₁	L ₂	L ₃	R ₁	R ₂	Order code
18	12	8	15.5	9.5	3	2	0.9	0.2	Z7 1812 N3578
20	14	8	17.5	9.5	3	2	0.9	0.2	Z7 2014 N3578
25	18	9	22.5	9.5	3	2	1.3	0.2	Z7 2518 N3578
28	22	8	25.5	9.5	3	2	1.3	0.2	Z7 2822 N3578
30	23	9	27.5	10	3	2	1.3	0.2	Z7 3023 N3578
32	25	9	29.5	10	3	2	1.3	0.2	Z7 3225 N3578
35	28	9	32.5	10	3	2	1.3	0.2	Z7 3528 N3578
40	33	9	37.5	10	3	2	1.3	0.2	Z7 4033 N3578
45	38	9	42.5	10	3	2	1.3	0.2	Z7 4538 N3578
50	43	9	47.5	10	3	2	1.3	0.2	Z7 5043 N3578
54	46	10	51.5	11	4	2	1.3	0.2	Z7 5446 N3578
63	53	13	60	14.5	5	2.5	1.6	0.3	Z7 6353 N3578
63	56	9	60.5	10	3	2	1.3	0.3	Z7 6356 N3578
70	62	10	67.5	11	4	2	1.6	0.3	Z7 7007 N3578
80	72	10	77.4	11	4	2	1.6	0.3	Z7 8067 N3578
80	70	14	77	15.5	6	2.5	1.6	0.3	Z7 8070 N3578

Further sizes on request.



The Z8 cylinder seal is a single-acting U-ring for pistons in pneumatic cylinders and valves. It is characterized by small axially installed dimensions. The standard range of the Z8 product series conforms to the cylinder diameters acc. to ISO 3320 and CETOP RP 52 P, RP 43 P and RP 53 P.

The Z8 product series is available in both Ultrathan® and rubber compounds. The Ultrathan® versions are characterized by extremely high resistance against wear and pressure peaks.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Good sealing performance in extremely small assembly conditions.
- Good wear resistance.
- Low static and dynamic friction thanks to miniaturized design.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed and undercut housings.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-20 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: N3580, a special NBR-based SFR® elastomer (≈ 80 Shore A). This compound offers excellent running properties, especially in the semi-frictional area.

for low temperatures: N8602, NBR compound (≈ 70 Shore A)

for high temperatures: V8550, FKM compound (≈ 80 Shore A)

Installation

Profile Z8 piston seals can be easily mounted into the grooves by simply pulling them over the piston. To avoid damaging the seals sharp edges should be removed from the piston and the cylinder tube.


For oil-free operating conditions, it is important to obtain a full lubrication film inside the cylinder tube before assembly to ensure long service life of the seal.

For piston guidance we recommend our profile F2 piston guidance tape. For dimensions of pistons and clearances, please refer to our profile F2.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Piston seal

Z8 (NBR)

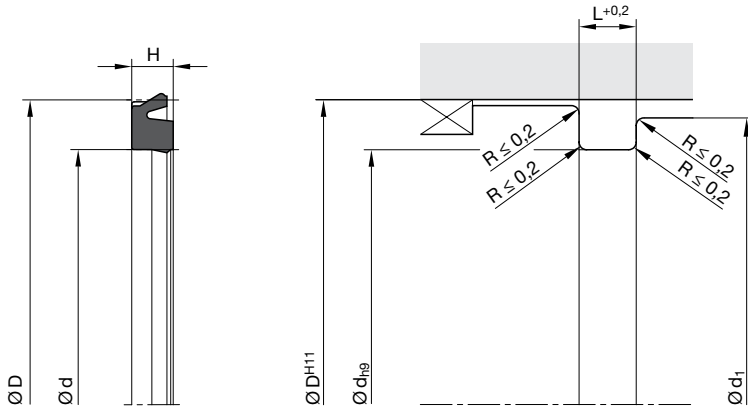

d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	d_1	Order code	D	d	H	L	d_1	Order code
4	1.5	1.5	2	3.6	Z8 0415 N3580	57	50.5	3.25	3.5	56.4	Z8 5705 N3580
5	2.5	1.5	2	4.6	Z8 0504 N3580	58	48	4.25	4.5	57.4	Z8 5816 N3580
6	3	2	2.5	5.6	Z8 0630 N3580	63	53	4.25	4.5	62.4	Z8 6353 N3580N
8	4	2.55	3	7.6	Z8 0804 N3580	80	70	4.25	4.5	79.4	Z8 8070 N3580
8	4.8	2.3	2.7	7.6	Z8 0806 N3580	90	80	4.25	4.5	89.4	Z8 9080 N3580N
8	5.45	2.3	2.8	7.6	Z8 0810 N3580	100	90	4.25	4.5	99.4	Z8 A090 N3580
10	3	3.5	4	9.6	Z8 1003 N3571	125	105	8.25	8.5	123.8	Z8 C505 N3580
10	6	2.55	3	9.6	Z8 1006 N3580	150	130	8.25	8.5	148.8	Z8 F113 N3580
11	6	2.55	3	10.6	Z8 1106 N3580	160	140	8.25	8.5	158.8	Z8 G014 N3580
12	7	2.55	3	11.6	Z8 1207 N3580	200	180	8.25	8.5	198.8	Z8 L018 N3580
13	8	2.55	3	12.6	Z8 1030 N3580						
14	8	2.55	3	13.6	Z8 1421 N3580						
15	9	2.55	3	14.6	Z8 1509 N3580						
16	10	2.55	3	15.6	Z8 1610 N3580						
16	11	2.55	3	15.6	Z8 1611 N3580						
18	12	2.55	3	17.6	Z8 1812 N3580						
20	14	2.55	3	19.6	Z8 2014 N3580						
21	15	2.55	3	20.4	Z8 2115 N3580						
22	16	2.55	3	21.4	Z8 2216 N3580						
24	18	3.25	3.5	23.4	Z8 2418 N3580						
25	19	3.25	3.5	24.4	Z8 2519 N3580						
28	22	3.25	3.5	27.4	Z8 2822 N3580						
30	22	3.25	3.5	29.4	Z8 3022 N3580						
30	22.5	4.8	5.2	29.4	Z8 3023 N3580						
32	24	3.25	3.5	31.4	Z8 3224 N3571						
35	27	3.25	3.5	34.4	Z8 3527 N3580N						
36	28	3.25	3.5	35.4	Z8 3628 N3580						
37	29	3.25	3.5	36.4	Z8 3729 N3580						
38	30	3.25	3.5	37.4	Z8 3818 N3580N						
40	32	3.25	3.5	39.4	Z8 4032 N3580N						
42	34	3.25	3.5	41.4	Z8 4234 N3580N						
45	37	3.25	3.5	44.4	Z8 4522 N3580N						
50	42	3.25	3.5	49.4	Z8 5042 N3580N						
52	42	4.25	4.5	51.4	Z8 5205 N3580						

Further sizes on request.



The Z8 cylinder seal is a single-acting U-ring for pistons in pneumatic cylinders and valves. It is characterized by small axially installed dimensions. The standard range of the Z8 product series conforms to the cylinder diameters acc. to ISO 3320 and CETOP RP 52 P, RP 43 P and RP 53 P.

The Z8 product series is available in both Ultrathan® and rubber compounds. The Ultrathan® versions are characterized by extremely high resistance against wear and pressure peaks.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Good sealing performance in extremely small assembly conditions.
- Extreme wear resistance.
- Low static and dynamic friction thanks to miniaturized design.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed and undercut housings.
- Low compression set.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-35 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: P5007, Ultrathan® (TPU) compound (≈ 82 Shore A).
For low temperatures: P5075, Ultrathan® (TPU) compound (≈ 80 Shore A).

Installation

Profile Z8 piston seals can be easily mounted into the grooves by simply pulling them over the piston. To avoid damaging the seals sharp edges should be removed from the piston and the cylinder tube.


For oil-free operating conditions, it is important to obtain a full lubrication film inside the cylinder tube before assembly to ensure long service life of the seal.

For piston guidance we recommend our profile F2 piston guidance tape. For dimensions of pistons and clearances, please refer to our profile F2.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Piston seal

Z8 (TPU)

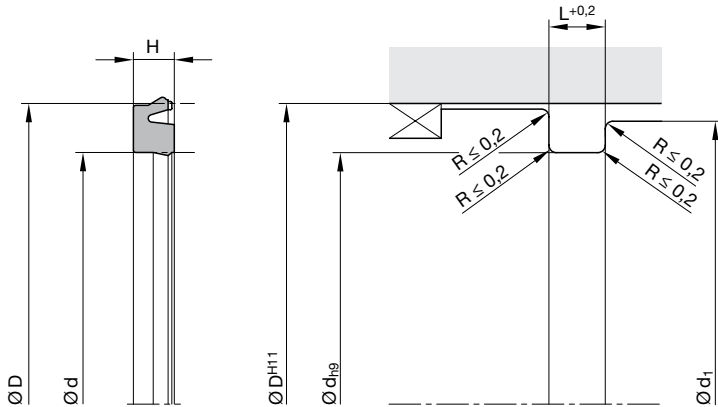

d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	d_1	Order code
8	4	2.55	3	7.6	Z8 0804 P5007
8	4.8	2.55	3	7.6	Z8 0807 P5007
10	6	2.55	3	9.6	Z8 1006 P5007
12	7	2.55	3	11.6	Z8 1207 P5007
12.6	7.5	2.55	3	12.2	Z8 1260 P5007
16	10	2.55	3	15.6	Z8 1610 P5007
20	14	2.55	3	19.6	Z8 2014 P5007
25	19	3.25	3.5	24.4	Z8 2519 P5007
25	19	4	4.5	24.4	Z8 2520 P5007
28	22	3.25	3.5	27.4	Z8 2822 P5007
30	21	2.75	3.2	29.4	Z8 3021 P5007
32	24	3.25	3.5	31.4	Z8 3224 P5007
40	32	3.25	3.5	39.4	Z8 4032 P5007
50	42	3.25	3.5	49.4	Z8 5042 P5007
63	53	4.25	4.5	62.4	Z8 6353 P5007
80	70	4.25	4.5	79.4	Z8 8070 P5007
100	90	4.25	4.5	99.4	Z8 A090 P5007
125	105	8.25	8.5	123.8	Z8 C505 P5007
160	140	8.25	8.5	158.8	Z8 G014 P5007
200	180	8.25	8.5	198.8	Z8 L018 P5007

Further sizes on request.



The C2 piston seal meets the requirements of the manufacturers of hydraulic and pneumatic equipment for seals with the smallest possible housings. Although cross-sections and heights are very small the sealing performance is excellent. Extremely low friction is experienced because of the short contact to the sealing surface area. For installation in non-lubricated pneumatic systems (dry air) we recommend our profile E4 which fits into the same housings.

- Good wear resistance.
- Easier installation.
- Suitable for fully automatic installation.
- Assembly on one-part piston is possible.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.

Range of Application

Particularly recommended for pistons in hydraulic and pneumatic cylinders.

Operating pressure	≤ 160 bar ¹⁾
Hydraulics	≤ 160 bar
Pneumatics	≤ 16 bar
Operating temperature	
Hydraulics	-25 °C to +100 °C
Pneumatics	-25 °C to +80 °C
Sliding speed	≤ 0.5 m/s

¹⁾ Dependent upon cross-section and compound.

Compounds

Standard: N3584, NBR compound (≈ 80 Shore A).

For low temperatures: N8613, NBR compound (≈ 80 Shore A).

For high temperatures: V3664, FKM compound (≈ 85 Shore A).

Installation


The profile C2 piston seals are manufactured undersized in relation to the nominal dimensions. Only after installation will the sealing lip diameter have the desired dimensions. This lip seal may easily be snapped into the grooves. Care should be taken that the seals are not pulled over sharp edges.

In the case of double-acting pistons, pressure peaks should be avoided. In such cases, sealing elements with larger cross-sections or other profiles with header rings should be used.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Piston seal

C2

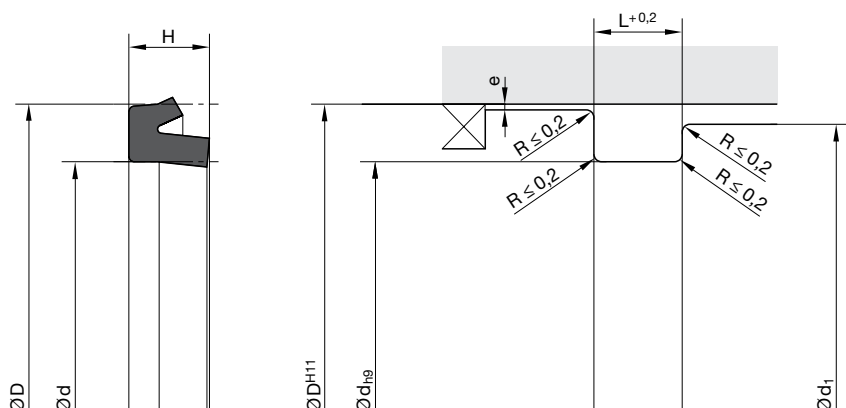


„e“ see chapter „Maximum gap allowance“.
d₁ = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	d ₁	Order code	D	d	H	L	d ₁	Order code
4	1.5	1.7	2	3	C2 0010 N3584	32	22	5	5.5	27	C2 3025 N3584
5	2	2.2	2.5	4	C2 0014 N3584	32	22	7	7.5	27	C2 3030 N3584
6	2.5	2	2.3	4.5	C2 0023 N3584	32	24	5.5	6	28	C2 3035 N3584
6	3	3	3.5	5	C2 0025 N3584	35	25	7	7.5	30	C2 3050 N3584
7.5	4	2	2.3	6	C2 0033 N3584	36	26	7	7.5	31	C2 3055 N3584
8	3	3.5	4	5.5	C2 0035 N3584	37	29	5.5	6	33	C2 3063 N3584
8	5	4	4.5	7	C2 0045 N3584	38	28	7	7.5	33	C2 3065 N3584
9.5	4.5	3.5	4	7	C2 0065 N3584	40	30	7	7.5	35	C2 4005 N3584
10	5	3.5	4	7.5	C2 1020 N3584	40	32	5.5	6	36	C2 4010 N3584
10	6	4.2	4.7	8	C2 1029 N3584	45	35	7	7.5	40	C2 4035 N3584
11	6	4	4.5	8.5	C2 1035 N3584	45	37	6	6.5	41	C2 4047 N3584
12	6	4	4.5	9	C2 1040 N3584	46	36	7	7.5	41	C2 4045 N3584
12	8	3	3.5	10	C2 1045 N3584	48	40	5.5	6	44	C2 4065 N3584
13	7	4	4.5	10	C2 1055 N3584	50	36	10	11	43	C2 5005 N3584
13.5	8	4	4.5	11	C2 1058 N3584	50	40	7	7.5	45	C2 5010 N3584
14	6	5.5	6	10	C2 1063 N3584	50	42	8	8.5	46	C2 5012 N3584
14	8	4	4.5	11	C2 1066 N3584	52	42	7	7.5	48	C2 5025 N3584
15	7	5.5	6	11	C2 1070 N3584	55	45	7	7.5	50	C2 5045 N3584
16	8	5.5	6	12	C2 1080 N3584	60	50	7	7.5	55	C2 6010 N3584
16	10	4	4.5	13	C2 1083 N3584	62	47	10	11	51.5	C2 6023 N3582
16	10	6	6.5	13	C2 1086 N3584	62	52	7	7.5	57	C2 6028 N3584
17.5	11.7	3	3.5	14.8	C2 1088 N3584	63	53	7	7.5	58	C2 6035 N3584
18	10	5.5	6	14	C2 1092 N3584	65	53	10	11	59	C2 6050 N3584
19.05	10.5	5.5	6	15	C2 1097 N3584	65	55	7	7.5	60	C2 6055 N3584
20	10	7	7.5	15	C2 2005 N3584	67	57	7	7.5	62	C2 6063 N3584
20	12	5.5	6	16	C2 2010 N3584	68	58	7	7.5	63	C2 6070 N3584
20	14	4.2	4.7	17	C2 2012 N3584	70	54	12	13	62	C2 7010 N3584
22	14	5.5	6	18	C2 2020 N3584	70	58	8.5	9.5	64	C2 7020 N3584
24	16	5.5	6	20	C2 2030 N3584	75	55	12	13	65	C2 7045 N3584
25	17	5.5	6	21	C2 2040 N3584	75	59	12	13	67	C2 7047 N3584
26	18	5.5	6	22	C2 2050 N3584	75	63	8.5	9.5	69	C2 7050 N3584
28	20	5.5	6	24	C2 2065 N3584	80	60	14	15	70	C2 8005 N3584
30	20	7	7.5	25	C2 3015 N3584	80	64	8	8.5	72	C2 8011 N3584
30	22	5.5	6	26	C2 3018 N3584	80	68	8.5	9.5	74	C2 8015 N3584

Further sizes on request.

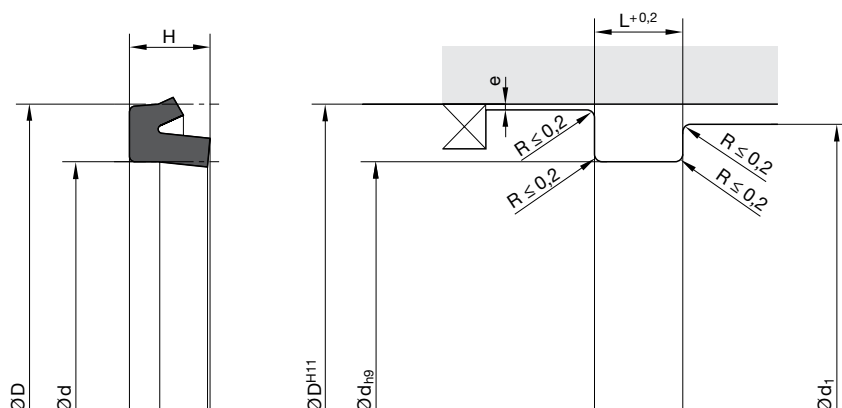

„e“ see chapter „Maximum gap allowance“.
 d_1 = minimum piston diameter on pressure side.

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	d_1	Order code	D	d	H	L	d_1	Order code
85	73	8.5	9.5	79	C2 8045 N3584	315	290	17	18	302.5	C2 Q020 N3584
90	70	12	13	80	C2 9015 N3584	350	320	21	22	335	C2 Q030 N3584
90	78	8.5	9.5	84	C2 9025 N3584						
100	80	15	16	90	C2 A010 N3584						
100	85	9.5	10.5	92.5	C2 A014 N3584						
100	85	12	13	92.5	C2 A015 N3584						
100	88	8.5	9.5	94	C2 A020 N3584						
100	90	7	7.5	95	C2 A025 N3584						
105	85	15	16	95	C2 A040 N3584						
110	95	10	11	102.5	C2 B010 N3584						
115	95	14	15	105	C2 B015 N3584						
120	100	15	16	110	C2 C015 N3584						
120	105	10	11	112.5	C2 C017 N3584						
125	105	16	17	115	C2 C024 N3584						
125	110	10	11	117.5	C2 C025 N3584						
130	115	10	11	122.5	C2 D010 N3584						
140	120	14	15	130	C2 E015 N3584						
140	125	10	11	132.5	C2 E020 N3584						
145	130	10	11	137.5	C2 E040 N3584						
150	135	10	11	142.5	C2 F015 N3584						
155	135	15	16	145	C2 F030 N3582						
160	140	14	15	150	C2 G015 N3584						
160	145	10	11	152.5	C2 G020 N3584						
175	155	14	15	165	C2 H020 N3584						
180	160	14	15	170	C2 J015 N3584						
190	170	14	15	180	C2 K015 N3584						
200	180	14	15	190	C2 L015 N3584						
220	200	14	15	210	C2 M015 N3584						
225	200	17.5	18.5	212.5	C2 M025 N3584						
240	220	14	15	230	C2 N015 N3584						
250	230	14	15	240	C2 N030 N3584						
260	240	14	15	250	C2 O015 N3584						
280	260	14	15	270	C2 P015 N3584						
300	280	15	16	290	C2 Q010 N3584						

Further sizes on request.



The MK piston seal made of wear-resistant Ultrathan® is a sealing element with an integrated guiding surface and cushioning buffers. This seal-guide element can be used both on pistons with or without a permanent magnet. When used in magnetic pistons, the seal-guide element encapsulates the permanent magnet. The front-end cushioning buffers serve to absorb shocks. For double-acting cylinder designs, the MK seal profile may also be used in a back-to-back arrangement.

- The asymmetrical retention groove ensures optimum positive connection between the sealing element and the piston.
- Cushioning buffers on the piston's front faces with integrated ventilation ducts provide for mechanical cushioning of the cylinders.
- Multi-functional sealing element. The guiding area at the sealing element performs the guiding function in the cylinder. However, due to its geometry the sealing element is not suitable for absorption of high radial forces or long strokes.
- Multi-functional element: seal, guiding and cushioning element.
- Optimal front-side sealing effect due to favourable cushioning buffer geometry.
- Prevents metallic contact between the piston and cylinder. Ideal for light-metal and plastic cylinders (ridging).
- Long service life thanks to application-optimized compounds.
- Easier installation.
- Assembly on one-part piston is possible.
- Excellent media resistance in case of suitable compound selection.
- Low compression set.

Range of Application

Operating pressure	≤ 12 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: P5010, Ultrathan® (TPU) Compound (≈ 90 Shore A).
For low temperatures: P5075, Ultrathan® (TPU) Compound (≈ 80 Shore A).
For high temperatures: V3664, FKM Compound (≈ 85 Shore A).

Installation


The MK piston seal features easy snap-on assembly with the retention groove for 12 to 25 mm diameters being machined into the piston rod. In order to prevent damage to the sealing lips during assembly, it is necessary to break sharp edges at the piston and cylinder. Under dry operating conditions, it is imperative to apply a continuous full-surface lubricating film inside the cylinder for achieving long service life. Because the seal itself also serves as a guide, additional guidance is not required.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.


Piston seal / guiding element

MK

Type 1: $D < 32$ mm

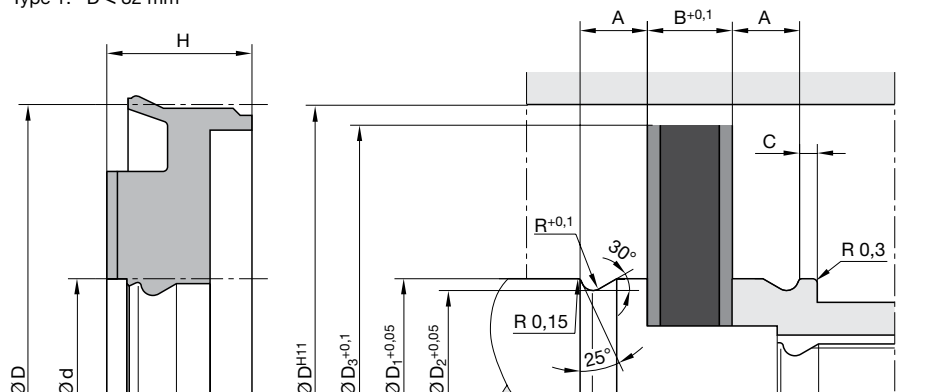

Type 2: $D \geq 32$ mm

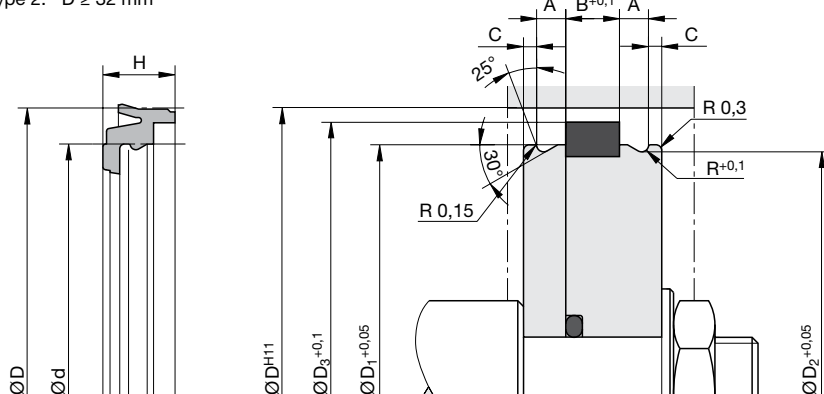

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	D ₁	D ₂	D ₃	A	B	C	R	Order code
12	6	5.9	6	5	10.4	2.5	3.65	0.6	0.5	MK 1206 P5010
16	8	5.9	8	7	14.4	3.25	2.65	0.65	0.5	MK 1608 P5010
20	10	5.9	10	9	18	2.85	3.65	0.55	0.5	MK 2010 P5010
25	10	6.15	10	9	23	2.85	3.65	0.75	0.5	MK 2510 P5010
32	25	7.15	25.05	23.8	29.2	2.3	4.4	0.9	0.6	MK 3225 P5010
40	33	7.65	33.05	31.8	36.8	2.6	4.8	0.9	0.6	MK 4033 P5010
50	43	7.65	43.05	41.8	46.9	2.6	4.8	0.9	0.6	MK 5043 P5010
63	53	9.9	53.05	51.4	59.8	4.1	5.3	1.4	0.8	MK 6353 P5010

Further sizes on request.



The Z5 pneumatic piston seal is a double U-ring with an integral guiding surface for double-acting pistons. The seal has two sealing lips for particularly high sealing performance.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Multi-functional sealing element. The guiding area at the sealing element performs the guiding function in the cylinder. However, due to its geometry the sealing element is not suitable for absorption of high radial forces or long strokes.
- Prevents metallic contact between the piston and cylinder. Ideal for light-metal and plastic cylinders (ridging).
- Good wear resistance.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easier installation.
- Assembly on one-part piston is possible.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Installation in open housings with retaining collar.

Range of Application

Operating pressure	≤ 16 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)


Compounds

Standard: N3578, NBR compound (≈ 75 Shore A).
For low temperatures: N8602, NBR compound (≈ 70 Shore A).
For high temperatures: V8550, FKM compound (≈ 80 Shore A).

Installation

The profile Z5 pneumatic cylinder seals can be easily mounted by pulling them over the one-piece piston. Care should be taken that all edges are chamfered to avoid seal damage.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

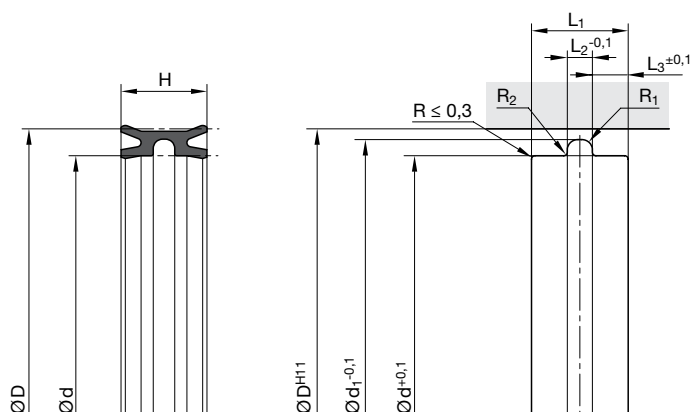

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	d ₁	L ₁	L ₂	L ₃	R ₁	R ₂	Order code
16	10	10.5	13.5	12	3	4.5	0.9	0.2	Z5 1610 N3578
18	12	10.5	15.5	12	3	4.5	0.9	0.2	Z5 1812 N3578
20	14	10.5	17.5	12	3	4.5	0.9	0.2	Z5 2014 N3578
25	18	12	22.5	13	3	5	1.3	0.2	Z5 2518 N3578
28	22	10.5	25.5	12	3	4.5	0.9	0.2	Z5 2822 N3578
30	23	12	27.5	13	3	5	1.3	0.2	Z5 3023 N3578
32	25	12	29.5	13	3	5	1.3	0.2	Z5 3225 N3578
35	28	12	32.5	13	3	5	1.3	0.2	Z5 3528 N3578
40	33	12	37.5	13	3	5	1.3	0.2	Z5 4033 N3578
45	38	12	42.5	13	3	5	1.3	0.2	Z5 4538 N3578
50	43	12	47.5	13	3	5	1.3	0.2	Z5 5043 N3578
54	46	13	51.5	15	4	5.5	1.3	0.2	Z5 5446 N3578
63	53	17	60	19	5	7	1.6	0.3	Z5 6353 N3578
63	56	12	60.5	13	3	5	1.3	0.3	Z5 6356 N3578
70	62	13	67.5	15	4	5.5	1.6	0.3	Z5 7007 N3578
76	66	18	73	20	6	7	1.6	0.3	Z5 7666 N3578
80	72	13	77.4	15	4	5.5	1.6	0.3	Z5 8067 N3578
80	70	18	77	20	6	7	1.6	0.3	Z5 8070 N3578
100	88	21	96.5	23	8	7.5	1.6	0.4	Z5 A088 N3578
100	90	16	97	18	4	7	1.6	0.3	Z5 A089 N3578
125	113	15	122	17	5	6	1.6	0.4	Z5 C511 N3578
125	113	21	121.5	23	8	7.5	1.6	0.4	Z5 C513 N3578
130	120	17	127	19	5	7	1.6	0.3	Z5 D017 N3578
140	128	21	136.5	23	8	7.5	1.6	0.4	Z5 E028 N3578
150	140	17	147	19	5	7	1.6	0.3	Z5 F014 N3578
160	145	26	155.5	29	10	9.5	1.6	0.4	Z5 G045 N3578
200	185	26	195.5	29	10	9.5	1.6	0.4	Z5 L085 N3578

Further sizes on request.



The PZ pneumatic piston seal has been developed for use in pneumatic cylinders and in valves. The double-acting piston seal requires only very small housing dimensions and is therefore especially suitable for compact cylinders.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Good sealing performance in extremely small assembly conditions.
- Can also be used for single-acting applications.
- Good wear resistance.
- Low static and dynamic friction thanks to miniaturized design.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Suitable for fully automatic installation.
- Assembly on one-part piston is possible.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Short axial assembly length.
- Installation in closed housings.

Range of Application

Operating pressure	≤ 12 bar
Operating temperature	-20 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard: N3571, NBR compound (≈ 70 Shore A).
For low temperatures: N8602, NBR compound (≈ 70 Shore A).
For high temperatures: V3681, FKM compound (≈ 80 Shore A).

Installation


The profile PZ pneumatic piston seals can be easily mounted into the grooves by simply pulling them over the piston.

To avoid damaging the seal, sharp edges should be removed from the piston and the cylinder tube.

For oil-free conditions, it is important to obtain a full lubrication film inside the cylinder tube prior to assembly to ensure long service life of the seal.

For piston guidance, we recommend our profile F2 piston guidance tape. For dimensions of pistons and clearances, please refer to our profile F2.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

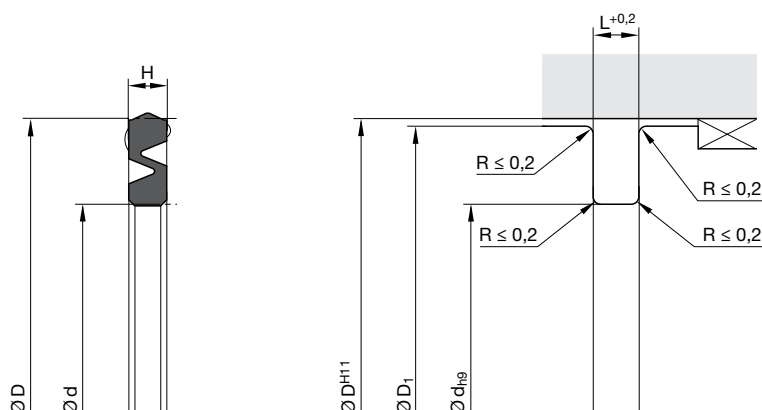

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	L	D ₁	Order code
10	6.5	1.4	1.8	9.6	PZ 1006 N3571
12	7	2	2.5	11.6	PZ 1207 N3571
16	9	2.1	2.5	15.6	PZ 1605 N3571
20	13	2.1	2.5	19.6	PZ 2013 N3571
25	18	2.1	2.5	24.6	PZ 2518 N3571
28	19	2.5	3	27.6	PZ 2819 N3571
30	21	2.5	3	29.6	PZ 3021 N3571
32	23	2.5	3	31.6	PZ 3210 N3571
35	26	2.5	3	34.5	PZ 3520 N3571
40	31	2.5	3	39.5	PZ 4031 N3571
45	36	2.5	3	44.5	PZ 4520 N3571
50	41	2.5	3	49.5	PZ 5010 N3571
63	51	3.4	4	62.5	PZ 6051 N3571
80	68	3.4	4	79.5	PZ 8010 N3571
100	88	3.4	4	99.4	PZ A008 N3571
125	110	4.4	5	124.4	PZ C050 N3571

Further sizes on request.



The double-acting OA piston sealing set featuring a Slipper Seal® design consists of a PTFE piston sealing ring and an elastomer O-ring as a preloading element. The seal design is intended for pneumatic applications. The symmetrical cross section of the sealing ring is designed for uniform formation of the lubricant film during the stroke in both directions. The OA sealing set is particularly well suited for double-acting pistons.

Due to the material combination of the slide ring (PTFE) and O-ring (elastomer), this product is suitable for a wide range of applications, especially for aggressive media and/or high temperatures. For pneumatic applications, the piston sealing ring is preferably made from a carbon-filled PTFE compound in order to avoid chemical reactions with the aluminum components of the cylinder. Alternatively, several compounds can be selected, depending on the specific applications profile.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Good sealing performance in extremely small assembly conditions.
- Can also be used for single-acting applications.
- Good wear resistance.
- Minimal break-away and dynamic friction and no stick-slip tendency ensures uniform motion even at low speeds.
- Good energy efficiency due to low friction.
- Very good emergency running properties in low-lube conditions.
- Assembly on one-part piston is possible.
- High temperature resistance assured by suitable O-ring compound selection.
- Adaptable to nearly all media thanks to high chemical resistance of the sealing ring and large O-ring compound selection.
- Short axial assembly length.
- Installation in closed and undercut housings.
- Available in diameters from 4 to 4500 mm.
- Additional sizes of machined products available on short notice.

Range of Application

Piston sealing set for pneumatic applications.

Operating pressure	≤ 16 bar
Operating temperature	-30 °C to +80 °C ¹⁾
Sliding speed	≤ 4 m/s

¹⁾ With deviation from standard temperature range, please contact our consultancy service for adequate O-ring compound.

Compounds

Sealing ring: Polon® 033, PTFE + 25 % carbon.


O-ring: N0674, NBR elastomer with approx. 70 Shore A.

Installation

The grooves must be carefully cleaned and deburred. The cylinder bore must have a lead-in chamfer. When fitting the piston sealing ring there is always a risk that the ring may tilt and be sheared off by normal lead-in chamfers (see chapter "General installation guidelines for piston seals, PTFE seals", fig. 1). We therefore recommend that up to a cylinder diameter of 230 mm a lead-in chamfer according to fig. 2 or detail "A" is considered. In the case of smaller rings which are especially liable to bending we recommend an open-groove design for diameters smaller than 30 mm.

This seal should only be used in combination with guiding elements (e.g. profile F2).


In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

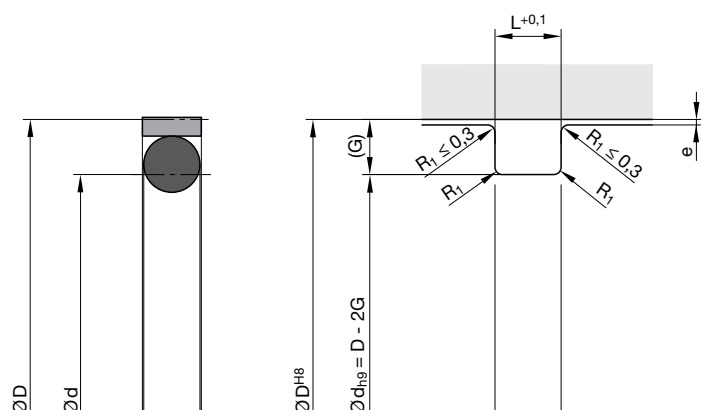

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

Series no.	Cross-section	O-ring cross-section (mm)	Recommended piston Ø range		Groove width L (mm)	Groove depth G (mm)	Gap max. e (mm)	Radius max. R ₁ (mm)
			≥,	<,				
01800	A	1.78	7	16	2.00	2.00	0.20	0.5
01800	B	2.62	16	27	2.85	3.00	0.25	0.5
01800	C	3.53	27	50	3.80	3.75	0.25	0.5
01800	D	5.33	50	130	5.60	6.25	0.50	0.9
01800	E	6.99	130	180	7.55	7.50	0.50	0.9
01800	F	6.99	180	240	7.55	9.00	0.75	0.9
01800	G	6.99	240	420	7.55	12.00	1.00	0.9

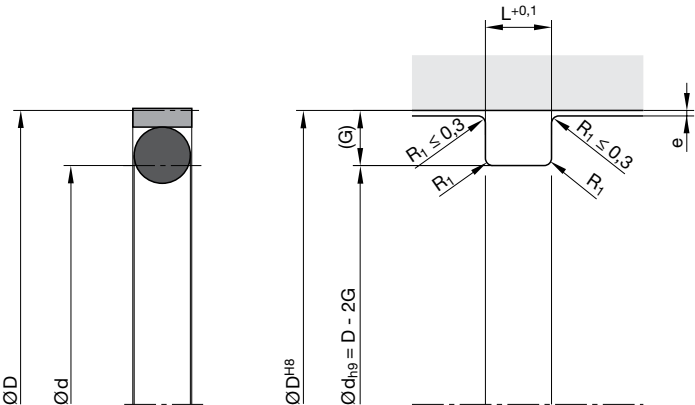

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example


Piston diameter 40 mm

OA 0400 033 01801 C (40 × 32.5 × 3.8)

OA	Profile			
0400	Piston diameter × 10			
033	Compound			
01801	Series no. / compound code O-ring			
	01800	without O-ring		
	01801	N0674 (NBR)	70 ^{±5} Shore A	-30 / +110 °C
	01802	V0747 (FKM)	75 ^{±5} Shore A	-25 / +200 °C
	01803	N0756 (NBR)	75 ^{±5} Shore A	-50 / +110 °C
	01804	E0540 (EPDM)	80 ^{±5} Shore A	-40 / +150 °C
	01805	N3578 (NBR)	75 ^{±5} Shore A	-30 / +110 °C
	01806	N0552 (NBR)	90 ^{±5} Shore A	-30 / +100 °C
	01807	N1173 (HNBR)	70 ^{±5} Shore A	-30 / +150 °C
C	Cross-section			

Please note:

For certain applications, it might be convenient to use a non-standard cross-section reduced or heavier. In these cases, please replace the standard cross-section code (in above example: „C“) by the one you require (for example „B“ or „D“).

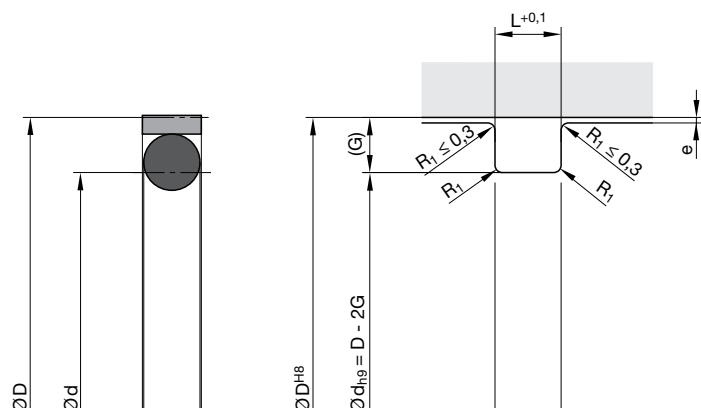

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Standard range

Size	Groove			O-ring		
	Ø D (mm)	Ø d (mm)	L (mm)	No.	CS (mm)	ID (mm)
0070	7	3	2	2-006	1.78	2.90
0080	8	4	2	2-007	1.78	3.68
0090	9	5	2	2-008	1.78	4.47
0100	10	6	2	2-010	1.78	6.07
0110	11	7	2	2-010	1.78	6.07
0120	12	8	2	2-011	1.78	7.65
0140	14	10	2	2-012	1.78	9.25
0160	16	10	2.85	2-110	2.62	9.19
0180	18	12	2.85	2-112	2.62	12.37
0190	19	13	2.85	2-112	2.62	12.37
0200	20	14	2.85	2-113	2.62	13.94
0220	22	16	2.85	2-114	2.62	15.54
0250	25	19	2.85	2-116	2.62	18.72
0280	28	20.50	3.80	2-211	3.53	20.22
0300	30	22.50	3.80	2-212	3.53	21.82
0320	32	24.50	3.80	2-214	3.53	24.99
0350	35	27.50	3.80	2-215	3.53	26.57
0360	36	28.50	3.80	2-216	3.53	28.17
0380	38	30.50	3.80	2-217	3.53	29.74
0400	40	32.50	3.80	2-219	3.53	32.92
0420	42	34.50	3.80	2-220	3.53	34.52
0450	45	37.50	3.80	2-221	3.53	36.09
0480	48	40.50	3.80	2-223	3.53	40.87
0500	50	37.50	5.60	2-325	5.33	37.47
0550	55	42.50	5.60	2-326	5.33	40.64
0600	60	47.50	5.60	2-328	5.33	46.99
0630	63	50.50	5.60	2-329	5.33	50.17
0650	65	52.50	5.60	2-329	5.33	50.17

Size	Groove			O-ring		
	Ø D (mm)	Ø d (mm)	L (mm)	No.	CS (mm)	ID (mm)
0700	70	57.50	5.60	2-331	5.33	56.52
0740	74	61.50	5.60	2-332	5.33	59.69
0750	75	62.50	5.60	2-333	5.33	62.87
0800	80	67.50	5.60	2-334	5.33	66.04
0850	85	72.50	5.60	2-336	5.33	72.39
0900	90	77.50	5.60	2-337	5.33	75.57
0920	92	79.50	5.60	2-338	5.33	78.74
1000	100	87.50	5.60	2-340	5.33	85.09
1050	105	92.50	5.60	2-342	5.33	91.44
1100	110	97.50	5.60	2-344	5.33	97.79
1150	115	102.50	5.60	2-345	5.33	100.97
1200	120	107.50	5.60	2-347	5.33	107.32
1250	125	112.50	5.60	2-348	5.33	110.49
1300	130	115	7.55	2-425	6.99	113.67
1400	140	125	7.55	2-428	6.99	123.19
1500	150	135	7.55	2-431	6.99	132.72
1600	160	145	7.55	2-435	6.99	142.24
2000	200	182	7.55	2-441	6.99	177.17
2200	220	202	7.55	2-444	6.99	196.22

Further sizes on request.



The single-acting pneumatic complete piston DE is a two-component seal design, consisting of a metallic carrier with a vulcanized guiding surface and sealing lip. The complete piston performs two functions: sealing and guiding.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Immediate response (full pressure load) thanks to incorporated venting channels.
- Good wear resistance.
- Ideal corrosion protection thanks to complete elastomer covering.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- Easy attachment to the piston rod without additional sealing elements.
- Easy installation due to integrated static sealing function.
- Excellent media resistance in case of suitable compound selection.
- Also available as double-acting version.
- Low assembly height of the complete piston enables short cylinder designs.
- Versatile complete piston for nearly all cylinder designs.

Range of Application

Complete piston for single-acting pneumatic cylinders with and without end position cushioning, provided that no excessive lateral guidance loads will occur (long strokes and buckling).

Operating pressure	≤ 16 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard compound is an elastomer (NBR-based) with a hardness of approx. 71 Shore A and vulcanized to a metal disc, resp. 78 Shore A for diameters > 100 mm.

Installation


The profile EK complete piston is fixed to the piston rod with a locknut to avoid loosening. For use with dry and oil-free air, the piston and cylinder tube must be prelubricated with a suitable long-life lubricant.

It must be assured that the sealing lips do not touch the cylinder bottom and the cylinder cap at the limit stops (see also dimension „Ø dm“).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Complete piston

EK

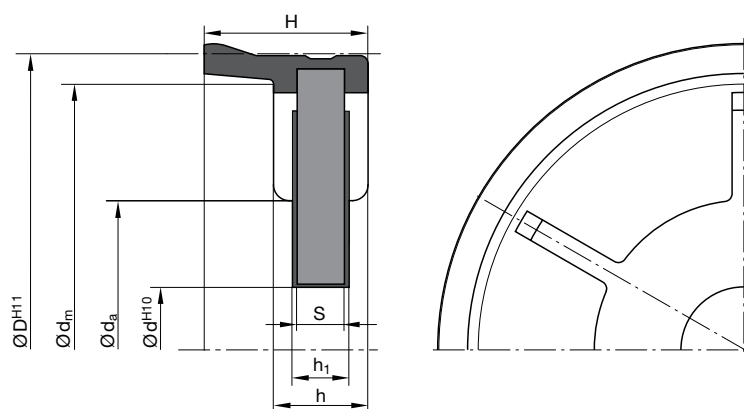

$\varnothing d_m = \text{max. } \varnothing \text{ of joining metal parts}$

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	h	d _a	h ₁	d _m	Order code
25	8	7.9	6	16	3.6	21	EK 2508 Z5051
32	8	10.65	6.5	16	4	26.5	EK 3208 Z5051
40	10	12.4	7	22	4.6	34	EK 4009 Z5051
40	14	13.4	7	22	4	34	EK 4014 Z5051
50	10	12.8	7.8	25	4.6	43	EK 5010 Z5051
50	14	13.4	7	25	5	43	EK 5014 Z5051
50	16	14	7.5	25	5	43	EK 5016 Z5051
63	27	14.1	7	40	4.6	57	EK 6332 Z5051
80	12	15.2	8	55	5.6	70	EK 8013 Z5051
80	16	15.2	8	55	5.6	70	EK 8016 Z5051
80	27	15.35	8.5	55	6	72	EK 8027 Z5051
125	20	17.6	9.5	90	5.6	114	EK C520 Z5050
140	22	19.6	10.5	108	6.6	125	EK E022 Z5050
200	27	24.55	14.5	150	10.6	180	EK L027 Z5050

Further sizes on request.



The single-acting pneumatic complete piston DE is a two-component seal design, consisting of a metallic carrier with a vulcanized guiding surface and sealing lip. The complete piston performs three functions: sealing, guiding and end position cushioning.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Cushioning buffers on the piston's front faces with integrated ventilation ducts provide for mechanical cushioning of the cylinders.
- Multi-functional element: seal, guiding and cushioning element.
- Immediate response (full pressure load) thanks to incorporated venting channels.
- Good wear resistance.
- Ideal corrosion protection thanks to complete elastomer covering.
- Smooth running due to optimum adjustment of the functional lips.
- Easy attachment to the piston rod without additional sealing elements.
- Easy installation due to integrated static sealing function.
- Excellent media resistance in case of suitable compound selection.
- Also available as double-acting version.
- Low assembly height of the complete piston enables short cylinder designs.
- Versatile complete piston for nearly all cylinder designs.

Range of Application

Complete piston for single-acting pneumatic cylinders with end cushioning, provided that no excessive lateral guidance loads will occur (long strokes and buckling).

Operating pressure	≤ 12 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard compound is an elastomer (NBR-based) with a hardness of approx. 71 Shore A and vulcanized to a metal disc.


Installation

The profile DE complete piston is fixed to the piston rod with a locknut to avoid loosening. For use with dry and oil-free air, the piston and cylinder tube must be prelubricated with a suitable long-life lubricant.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Complete piston with integrated cushioning

DE

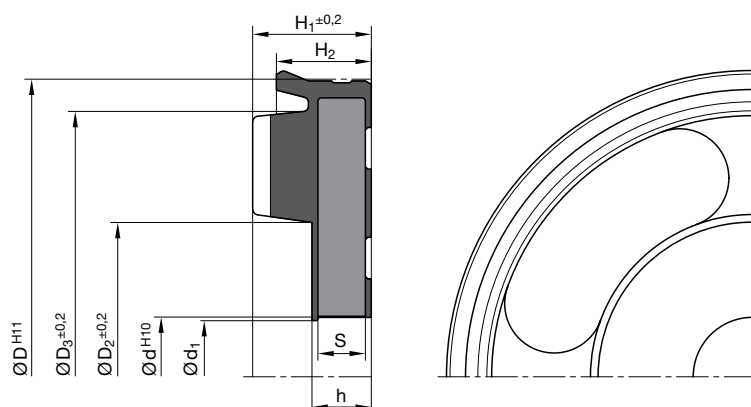

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H ₁	H ₂	S	h	D ₂	D ₃	Order code
8	3	3.7	3	1.5	1.8	4.2	6.3	DE 0803 Z5117
12	4.5	4.4	3.4	2	2.3	6.9	9.4	DE 1203 Z5108
16	4.5	4.4	3.4	2	2.3	6.9	13.2	DE 1603 Z5108
25	7	6.4	5.4	3	3.5	10.8	21.2	DE 2506 Z5108
32	8	7.5	6	3	3.5	12.5	27	DE 3208 Z5117
40	8	8.5	7	4	4.5	17	34.9	DE 4008 Z5117
50	10	10	8	4	4.5	26	43.9	DE 5010 Z5117
63	12	10	8	4	4.5	26	56.6	DE 6312 Z5117
80	16	11.4	9.4	5	5.5	30	72	DE 8016 Z5117
100	20	12.9	10.9	6	6.5	35	91	DE A020 Z5117

Further sizes on request.



The double-acting DK pneumatic piston is a two-component seal design consisting of a metallic supporting element with a vulcanized guiding ridge and sealing lips. The complete piston performs two functions: sealing and guiding.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Immediate response (full pressure load) thanks to incorporated venting channels.
- Good wear resistance.
- Ideal corrosion protection thanks to complete elastomer covering.
- Smooth running due to optimum adjustment of the functional lips.
- Easy attachment to the piston rod without additional sealing elements.
- Easy installation due to integrated static sealing function.
- Excellent media resistance in case of suitable compound selection.
- Low assembly height of the complete piston enables short cylinder designs.
- Versatile complete piston for nearly all cylinder designs.

Range of Application

Complete piston for double-acting pneumatic cylinders with and without cushioning, provided that no excessive lateral guidance loads will occur (long strokes and buckling).

Operating pressure ≤ 16 bar

Operating temperature

DK NBR Z5051 $-30\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$

DK TPU Z5071 $-35\text{ }^{\circ}\text{C}$ to $+80\text{ }^{\circ}\text{C}$

Sliding speed ≤ 1 m/s

Media Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard compound is an elastomer (NBR-based) with a hardness of approx. 71 Shore A and vulcanized to a metal disc, resp. 78 Shore A for diameters > 100 mm.

For high and/or low temperature applications special compounds are available.

Available sizes in the polyurethane compound P5008 are listed separately.

Installation


The profile DK pneumatic complete piston is fixed to the piston rod with a locknut to avoid loosening. For use with dry and oil-free air, the piston and cylinder tube must be prelubricated with a suitable long-life lubricant.

It must be assured that the sealing lips do not touch the cylinder bottom and the cylinder cap at the limit stops (see also dimension „ $\varnothing d_m$ “).

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Complete piston

DK

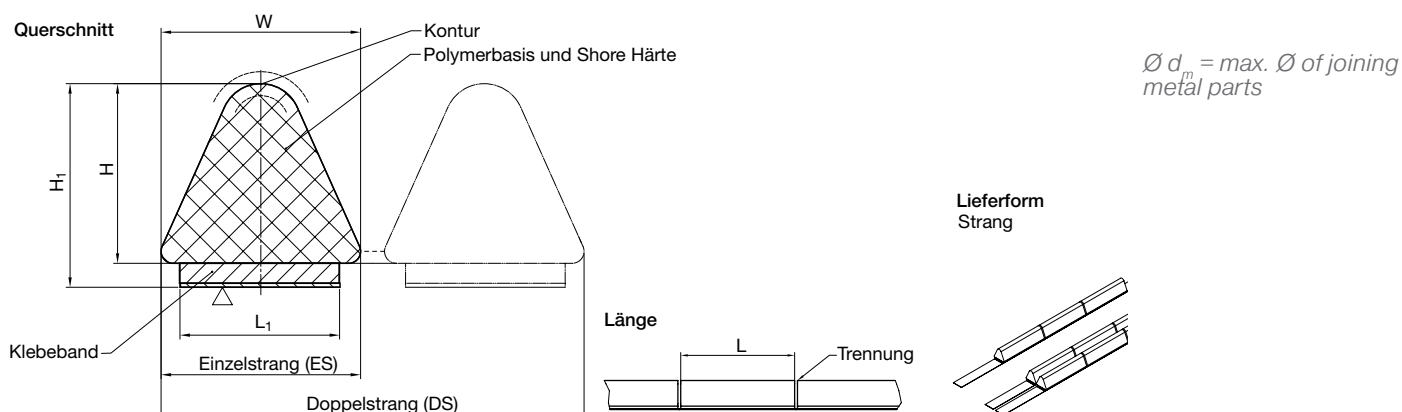


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	S	h	d _a	h ₁	d _m	Order code
DK NBR Z5051								
16	5	12	3	6	9	3.6	12	DK 1631 Z5051
20	6	12	3	6	10	3.6	16	DK 2031 Z5051
25	6	12	3	6	13.5	3.6	21	DK 2506 Z5051
25	8	12	3	4	16	3.6	21	DK 2508 Z5051
32	5	18	3	6	16	3.6	26.5	DK 3205 Z5051
32	6	15	3	6	16	3.6	26.5	DK 3206 Z5051
32	8	15	3	6	16	3.6	26.5	DK 3207 Z5051
32	8	15	3	6.5	16	4	26.5	DK 3210 Z5051
35	8	15	3	6	16	3.6	29.5	DK 3508 Z5051
40	8	18	4	7	22	4.6	34	DK 4007 Z5051
40	8	20	4	6.5	22	4.6	34	DK 4008 Z5051
40	10	18	4	7	22	4.6	34	DK 4009 Z5051
50	8	20	4	6.5	25	4.6	43	DK 5008 Z5051
50	10	18	4	7.8	25	4.6	43	DK 5010 Z5051
50	16	20.5	4	7	25	4.6	43	DK 5016 Z5051
60	12	21	4	6.5	37	4.6	52	DK 6012 Z5051
60	18	21	4	6.5	37	4.6	52	DK 6018 Z5051
63	12	22	5	8	40	5.6	55	DK 6312 Z5051
63	16	21.5	4	7	40	4.6	55	DK 6316 Z5051
70	12	22	5	8	44	5.6	62	DK 7012 Z5051
80	12	22.5	5	8	55	5.6	70	DK 8013 Z5051
80	16	22.5	5	8	55	5.6	70	DK 8016 Z5051
80	20	22.5	5	8	55	5.6	70	DK 8020 Z5051
100	12	25	6	10	72	6.6	90	DK A012 Z5051
100	16	25	6	10	72	6.6	90	DK A016 Z5051
100	20	26	6	10	72	6.6	90	DK A019 Z5051
125	20	26	5	9.5	90	5.6	114	DK C520 Z5050
125	20	28	7	12	90	8.2	114	DK C522 Z5050
130	20	29	8	13	98	8.6	123	DK D020 Z5050
140	22	29	6	10.5	108	6.6	125	DK E022 Z5050
150	20	29	10	13	100	10.6	143	DK F020 Z5050
160	27	29	6	10.5	110	6.6	145	DK G027 Z5050
200	27	35	10	14.5	150	10.6	180	DK L027 Z5050

Further sizes on request.

Complete piston

DK

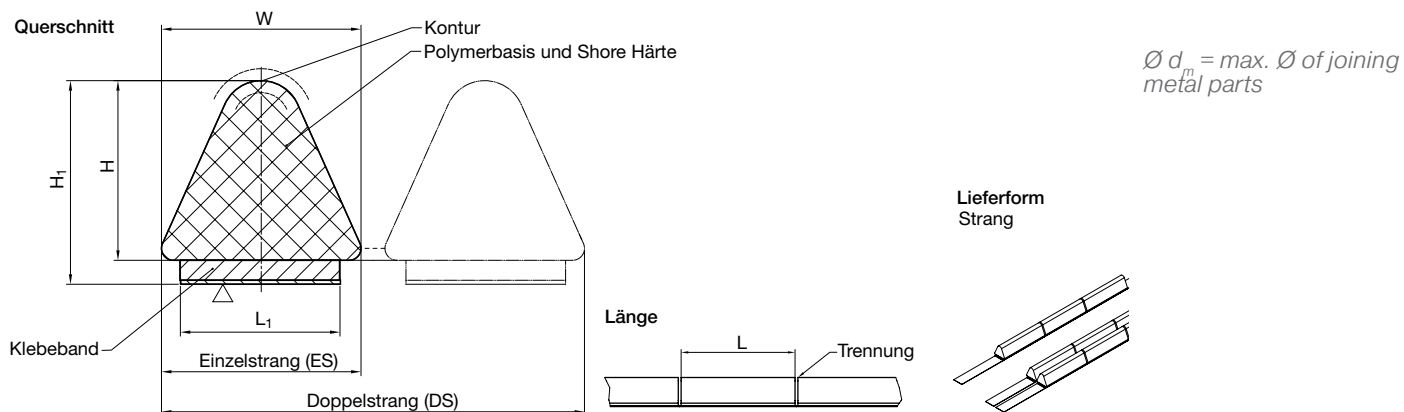

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H	S	h	d _a	h ₁	d _m	Order code
200	30	35	10	13	150	10.6	180	DK L030 Z5050
250	30	40	12	15	180	12.6	240.6	DK N131 Z5050
250	30	40	15	18	180	15.6	240.6	DK N130 Z5050
DK TPU Z5071								
40	10	18	4	7	22	5.4	34	DK 4009 Z5071
50	10	18	4	7.5	25	5.4	43	DK 5010 Z5071
63	16	21.5	4	7	40	5.4	55	DK 6316 Z5071

Further sizes on request.



The double-acting DP pneumatic piston is a two-component seal design consisting of a metallic supporting element with a vulcanized guiding ridge and sealing lips. The complete piston performs three functions: sealing, guiding and end position cushioning.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Cushioning buffers on the piston's front faces with integrated ventilation ducts provide for mechanical cushioning of the cylinders.
- Multi-functional element: seal, guiding and cushioning element.
- Immediate response (full pressure load) thanks to incorporated venting channels.
- Good wear resistance.
- Ideal corrosion protection thanks to complete elastomer covering.
- Smooth running due to optimum adjustment of the functional lips.
- Easy attachment to the piston rod without additional sealing elements.
- Easy installation due to integrated static sealing function.
- Excellent media resistance in case of suitable compound selection.
- Low assembly height of the complete piston enables short cylinder designs.
- Versatile complete piston for nearly all cylinder designs.

Range of Application

Complete piston with end cushioning for double-acting pneumatic cylinders, provided that no excessive lateral guidance loads will occur (long strokes and buckling).

Operating pressure	≤ 12 bar
Operating temperature	-30 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard compound is an NBR-based elastomer with a hardness of approx. 71 Shore A and vulcanized to a metal disc.


Installation

The profile DP pneumatic complete piston should be fixed to the piston rod with a locknut to avoid loosening. For use with dry and oil-free air, the piston and cylinder tube must be pre-lubricated with a suitable long-life lubricant.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Complete piston with integrated cushioning

DP

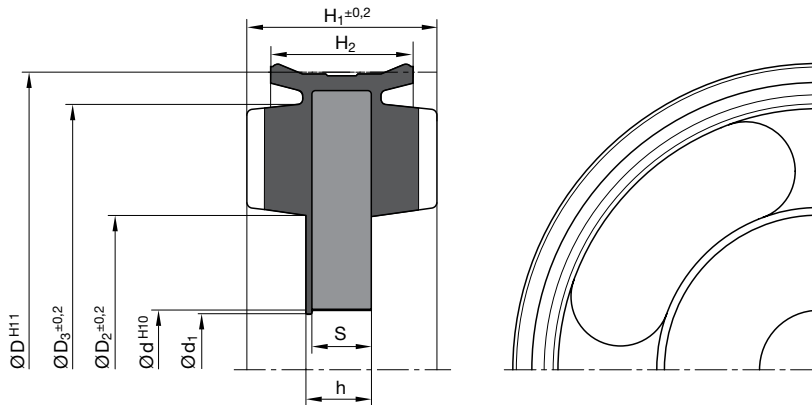

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H ₁	H ₂	S	h	D ₂	D ₃	Order code
6	2	3.8	3	1.25	1.45	3.2	5	DP 0602 Z5051
8	3	5	4	1.5	1.8	4.2	6.3	DP 0803 Z5051
10	3	5	4	1.5	1.8	5.2	8	DP 1003 Z5051
12	4.5	6	4	2	2.3	6.9	9.4	DP 1203 Z5051
12	4.5	6	5	2	2.3	6.9	10.2	DP 1204 Z5058
16	4.5	6.5	4.5	2	2.3	6.9	13.2	DP 1603 Z5051
16	4.5	6.5	5.5	2	2.4	6.9	13.9	DP 1604 Z5067
20	6	7.5	5.5	2.5	2.8	9.4	17	DP 2005 Z5051
20	6	7.5	6.3	2.5	2.9	8.8	17.3	DP 2006 Z5051
25	7	8.8	7	3	3.5	10.8	21.2	DP 2506 Z5051
25	7	8.8	7.6	3	3.5	10.8	22	DP 2507 Z5058
32	8	11	8	3	3.5	12.5	27	DP 3208 Z5051
40	8	11.8	8.8	4	4.5	17	34.9	DP 4008 Z5051
50	10	14	10	4	4.5	26	43.9	DP 5010 Z5051
63	12	14	10	4	4.5	26	56.6	DP 6312 Z5051
80	16	16	12	5	5.5	30	72	DP 8016 Z5051
100	20	18	14	6	6.5	35	91	DP A020 Z5051

Further sizes on request.



The double-acting DR pneumatic piston is a multi-component seal design consisting of a multi-part metallic supporting element with a vulcanized guiding ridge, sealing lips and an integrated magnet for inductive position sensing. The complete piston performs four functions: sealing, guiding, position sensing and end position cushioning.

The extremely slim complete piston is suitable for use in diverse cylinder designs and with various sensors. The combination of all functions – sealing, guiding, cushioning, sensing in a single component ensures ease of installation and additionally offers handling and logistics cost benefits.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Use of different types of sensors (inductive) is possible.
- Cushioning buffers on the piston's front faces with integrated ventilation ducts provide for mechanical cushioning of the cylinders.
- Multi-functional element: seal, guiding and cushioning element.
- Immediate response (full pressure load) thanks to incorporated venting channels.
- Good wear resistance.
- Ideal corrosion protection thanks to complete elastomer covering.
- Smooth running due to optimum adjustment of the functional lips.
- Easy attachment to the piston rod without additional sealing elements.
- Easy installation due to integrated static sealing function.
- Excellent media resistance in case of suitable compound selection.
- Low assembly height of the complete piston enables short cylinder designs.
- Versatile complete piston for nearly all cylinder designs.

Range of Application

Complete piston with end cushioning for double-acting pneumatic cylinders, provided that no excessive lateral guidance loads will occur (long strokes and buckling).

Operating pressure	≤ 10 bar
Operating temperature	-20 °C to +80 °C
Sliding speed	≤ 1 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

Standard compound is an NBR-based elastomer with a hardness of approx. 70 Shore A with vulcanised metal, magnet and reinforcing discs.


Installation

The magnetic piston DR is connected to the piston rod by threading or riveting. The threaded connection should be secured against loosening. For operation in dry or oil-free air, a long-term lubricant must be used for the piston and cylinder.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Magnetic piston with integrated cushioning

DR

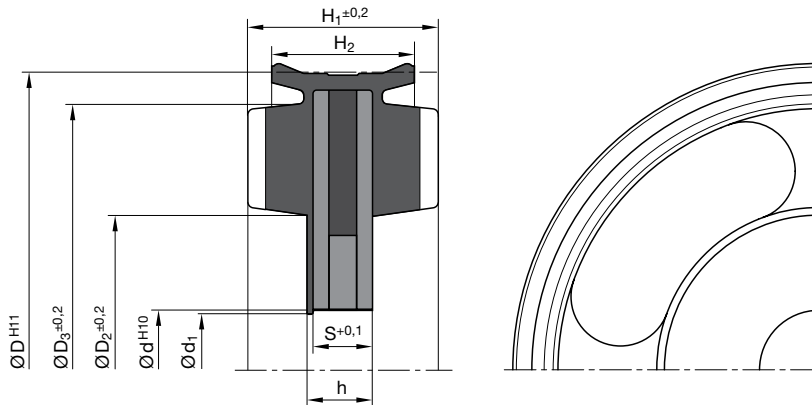








For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

D	d	H ₁	H ₂	S	h	D ₂	D ₃	Order code
16	4.5	6.5	5.1	2.65	2.95	6.9	13.5	DR 1604 Z4004
20	6	7.5	6.1	3.65	3.95	10.1	17.5	DR 2006 Z4004
25	7	9	7.6	3.65	4.15	11	21.9	DR 2507 Z4004
32	8	10.9	9.9	5	5.5	15	27.9	DR 3208 Z4004
40	8	11.9	9.7	5	5.5	20	35.7	DR 4008 Z4004
50	10	13.8	11.6	6	6.5	26	45.6	DR 5010 Z4018
63	12	13.8	11.6	6	6.5	33.2	58.25	DR 6312 Z4018
80	16	15.9	13.7	7	7.5	34.8	75.4	DR 8016 Z4018
100	20	17.9	15.7	8	8.5	47	95.4	DR A020 Z4018

Further sizes on request.



Other seal products

Profile cross-section	Profile reference	Page
Wipers		
	A2 (NBR)	98
	A2 (TPU)	98
Cushioning seals		
	PP (NBR)	100
	PP (TPU)	100
	V6	103
Guiding elements		
	F2	106
O-rings		
	V1	111



The A2 wiper ring serves to prevent ingress of dust, dirt, sand and swarf into dynamic rod guides. This is achieved by its special shape, which largely prevents scoring, protects the guidance parts and extends the service life of the seals. The wiper has been specifically developed for pneumatic equipment operated with dry and oil-free compressed air. Initial pre-assembly lubrication is a prerequisite for impeccable performance. An oversized outer diameter ensures interference fit in the groove and thus prevents intrusion of foreign particles and moisture on the wiper's outer diameter.

- Good wear resistance.
- Smooth running due to optimum lubricant-retaining sealing lip geometry.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Product geometry prevents dirt deposits at the front face of the cylinder.
- Installation in closed and undercut housings.

Range of Application

Suitable for axially operated rods in pneumatic working cylinders, plungers and rod guides.

Operating temperature	-30 °C to +80 °C
A2 NBR N3587	-35 °C to +80 °C
A2 TPU P5008	
Sliding speed	≤ 2 m/s
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

Compounds

NBR and FKM versions

Standard: N3587, NBR compound (≈90 Shore A).

For low temperatures: N8613, NBR compound (≈ 80 Shore A).

For high temperatures: V3664, FKM compound (≈ 85 Shore A).

PUR version

Standard: P5008, PUR compound (≈ 94 Shore A).

For low temperatures: P5009, PUR compound (≈ 94 Shore A).

Installation


A2 wiper rings are supplied as continuous rings. Any pressure on the back of the rings should be avoided.

Intermediate sizes may easily be manufactured from the next largest ring with the same cross-section. For this, the ring should be cut at an angle of 90° to the circumference length (+2 to 3 % in excess). Due to the excess length, the two ends will fit closely together so that no gap will occur. Gluing is not necessary. The wiper may easily be pressed into the groove recess with a resulting tight fit.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Wiper ring

A2

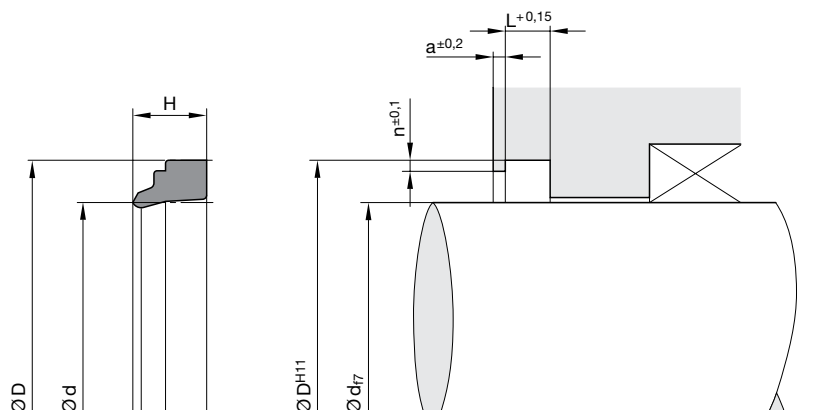

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	L	a	n	Order code
A2 NBR N3587						
10	16	5	2.6	1	1	A2 1016 N3587
12	20	7	4	1	1	A2 1005 N3587
16	24	7	4	1	1	A2 1055 N3587
18	26	7	4	1	1	A2 1015 N3587
20	28	7	4	1	1	A2 2005 N3587
22	30	7	4	1	1	A2 2230 N3587
25	33	7	4	1	1	A2 2025 N3587
28	36	7	4	1	1	A2 2044 N3587
30	38	7	4	1	1	A2 3010 N3587
36	44	7	4	1	1	A2 3030 N3587
40	48	7	4	1	1	A2 4003 N3587
45	53	7	4	1	1	A2 4015 N3587
50	58	7	4	1	1	A2 5010 N3587
56	64	7	4	1	1	A2 5025 N3587
60	68	7	4	1	1	A2 6005 N3587
70	78	7	4	1	1	A2 7015 N3587
90	98	7	4	1	1	A2 9007 N3587
A2 TPU P5008						
20	28	7	4	1	1	A2 2005 P5008

Further sizes on request.



The Ultrathan® PP cushioning ring is used for sealing cushioning pistons in pneumatic cylinders in the end position. By means of the sealing lip its special shape provides sealing toward the cushioning piston and concurrently acts as a valve during the return stroke. The combination of geometry and material ensures high wear resistance.

- No mechanical check valves required since their function is performed by the cushioning rings.
- High cushioning consistency due to automatic centering, even in the case of misalignment of the cushioning spear and the cylinder head.
- Optimum use of design-related cushion travel.
- Robust seal profile for harshest operating conditions.
- Immediate response to reversed direction thanks to incorporated venting channels.
- Extreme wear resistance.
- Easier installation.
- Excellent media resistance in case of suitable compound selection.
- Installation in closed housings.

Range of Application

For pneumatic cylinders with end-position cushioning.

Operating pressure $\leq 16 \text{ bar}^{1)}$

Operating temperature

PP NBR N3589 -20 °C to +80 °C

PP TPU P5008 -35 °C to +80 °C

Sliding speed $\leq 1 \text{ m/s}$

Media Compressed air, both lubricated and oil-free (after greasing for fitting)

¹⁾ Higher pressure peaks during cushioning process are considered.

Compounds

NBR and FKM version

Standard: N3589, NBR compound ($\approx 85 \text{ Shore A}$).

For low temperatures: N8613, NBR compound ($\approx 80 \text{ Shore A}$).

For high temperatures: V3839, FKM compound ($\approx 90 \text{ Shore A}$).

PUR version

Standard: P5008, PUR compound ($\approx 94 \text{ Shore A}$).

For low temperatures: P5009, PUR compound ($\approx 94 \text{ Shore A}$).

Installation


The profile PP cushioning seals are easily snapped into the groove, which should be free of all contaminants and foreign particles before installation. Care should be taken that the sealing lips are not damaged by sharp edges during installation.

Initial lubrication is essential for very long service life.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Cushioning seal

PP

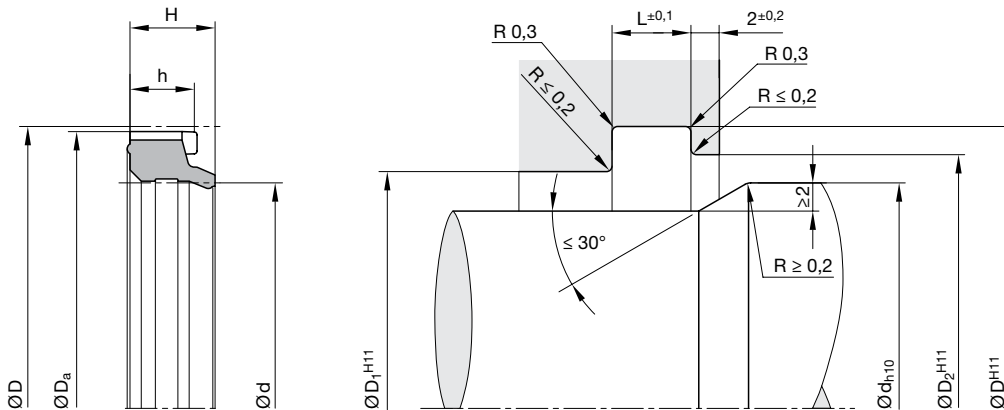


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	h	D _a	D ₁	D ₂	L	Order code
PP NBR N3589								
5	9	4.1	3.2	8.7	5.5	7	3.7	PP 0509 N3589
6	10	4.1	3.2	9.7	6.5	8	3.7	PP 0610 N3589
8	11.6	3.5	2.8	11.3	8.5	10	3.3	PP 0811 N3589
9.5	15	4.6	3.7	14.7	10	12	4.5	PP 0915 N3589
10	18	7.8	6.3	17	10.5	15	7	PP 1018 N3589
12	18	5	4.1	17.8	13	15.5	4.8	PP 1218 N3589
12	20	7.8	6.3	19.1	13	17	7	PP 1220 N3589
14	22	7.8	6.3	21.1	15	19	7	PP 1422 N3589
16	22	5.5	4.5	21.5	17	19.5	5.2	PP 1622 N3589
16	24	7.8	6.3	23.1	17	21	7	PP 1624 N3589
18	26	7.8	6.3	25.1	19	23	7	PP 1826 N3589
20	28	7.8	6.3	27.1	21	24	7	PP 2028 N3589
22	30	7.8	6.3	29.1	23	26	7	PP 2230 N3589
25	33	7.8	6.3	32.1	26	29	7	PP 2533 N3589
28	36	7.8	6.3	35.1	29	32	7	PP 2836 N3589
30	40	7.8	6.2	39.1	31.5	35	7	PP 3040 N3589
32	42	7.8	6.2	41.1	33.5	37	7	PP 3242 N3589
36	46	7.8	6.2	45.1	37.5	41	7	PP 3646 N3589
40	50	7.8	6.2	49.1	41.5	45	7	PP 4050 N3589
50	60	7.8	6.2	59.1	51.5	55	7	PP 5060 N3589
50	67	11	11	66.2	53	58	12.5	PP 5067 N3589
57	74	11	11	73.2	60	65	12.5	PP 5774 N3589
70	87	11	11	86.3	73	78	12.5	PP 7087 N3589
78	95	11	11	94.3	81	86	12.5	PP 7895 N3589
PP TPU P5008								
8	11.6	3.5	2.8	11.1	8.5	10	3.3	PP 0811 P5008
9.5	15	4.6	3.7	14.7	10	12	4.5	PP 0915 P5008
12	18	5	4.1	17.8	13	15.5	4.8	PP 1218 P5008
14	22	7.8	6.3	21.05	15	19	7	PP 1422 P5008
16	22	5.5	4.5	21.5	17	19.5	5.2	PP 1622 P5008
16	24	7.8	6.3	23.1	17	21	7	PP 1624 P5008
18	26	7.8	6.3	25.1	19	23	7	PP 1826 P5008
20	28	7.8	6.3	27.1	21	24	7	PP 2028 P5008

Further sizes on request.

Cushioning seal

PP

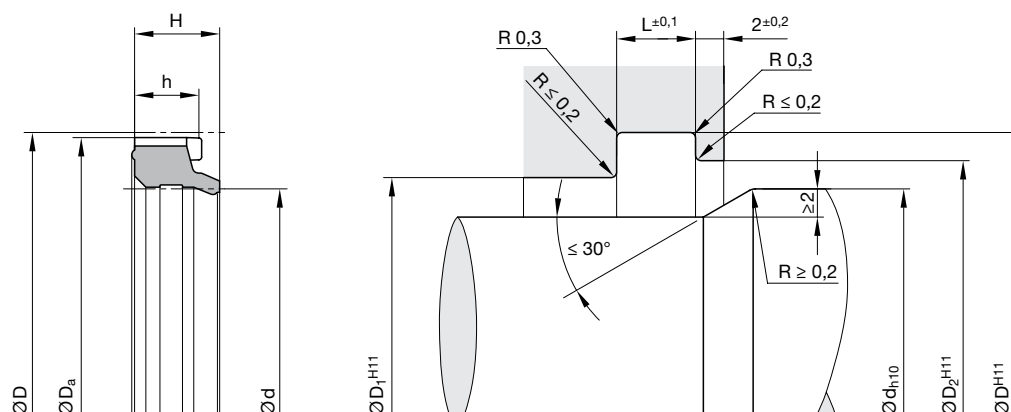

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	D	H	h	D_a	D_1	D_2	L	Order code
22	30	7.8	6.3	29.1	23	26	7	PP 2230 P5008
25	33	7.8	6.3	32.1	26	29	7	PP 2533 P5008
28	36	7.8	6.3	35.1	29	32	7	PP 2836 P5008
30	40	7.8	6.3	39.1	31.5	35	7	PP 3040 P5008
32	42	7.8	6.2	41.1	33.5	37	7	PP 3242 P5008
36	46	7.8	6.2	45.1	37.5	41	7	PP 3646 P5008
40	50	7.8	6.2	49.1	41.5	45	7	PP 4050 P5008
50	60	7.8	6.2	59.1	51.5	55	7	PP 5060 P5008
57	74	11	11	73.2	60	65	12.5	PP 5774 P5008
78	95	11	11	94.3	81	86	12.5	PP 7895 P5008

Further sizes on request.



The V6 cushioning ring is used for sealing cushioning pistons in pneumatic cylinders in the end position. The compact seal provides sealing toward the cushioning piston and concurrently acts as a valve during the return stroke. Due to the combination of geometry and material, small grooves are possible.

- No mechanical check valves required since their function is performed by the cushioning rings.
- Optimum use of design-related cushion travel.
- Immediate response to reversed direction thanks to incorporated venting channels.
- Good wear resistance.
- Easier installation.
- High temperature resistance in case of suitable compound selection.
- Excellent media resistance in case of suitable compound selection.
- Short axial assembly length.
- Short radial assembly depth.
- Installation in closed and undercut housings.

Range of Application

For pneumatic cylinders with end-position cushioning.

Operating pressure	$\leq 16 \text{ bar}^{1)}$
Operating temperature	$-30 \text{ }^{\circ}\text{C}$ to $+80 \text{ }^{\circ}\text{C}$
Sliding speed	$\leq 1 \text{ m/s}$
Media	Compressed air, both lubricated and oil-free (after greasing for fitting)

¹⁾ Higher pressure peaks during cushioning process are considered.

Compounds

Standard: N3578, NBR compound ($\approx 75 \text{ Shore A}$).

For low temperatures: N8613, NBR compound ($\approx 80 \text{ Shore A}$).

For high temperatures: V3839, FKM compound ($\approx 90 \text{ Shore A}$).


Installation

For the cushioning spear ($\emptyset d$) we recommend a surface finish of $R_t = 2$ to $3 \text{ }\mu\text{m}$ with flattened or polished process traces. The groove bottom ($\emptyset D^{H11}$) should not exceed surface finish of $R_t = 10 \text{ }\mu\text{m}$ with flattened or polished traces.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Cushioning seal

V6

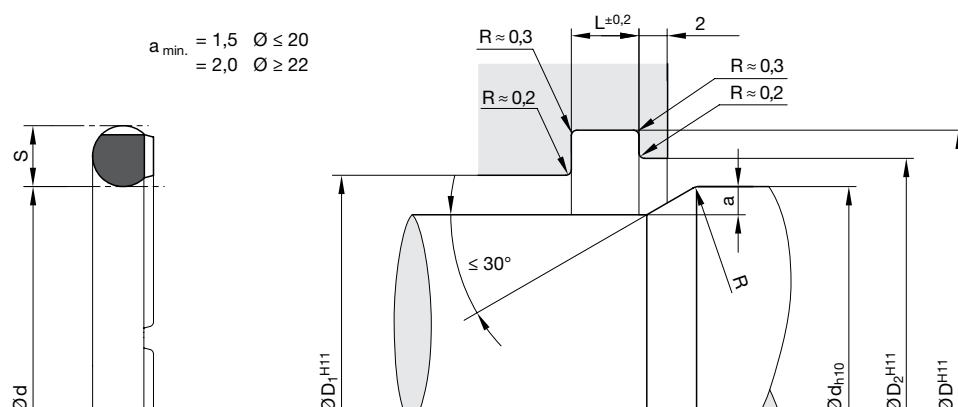

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	S	D	D ₁	D ₂	R	L	Order code
10	4	18	10.5	12	3	4.8	V6 1004 N3578
12	4	20	12.5	14	3	4.8	V6 1204 N3578
14	4	22	14.5	16	3	4.8	V6 1404 N3578
16	4	24	16.5	18	3	4.8	V6 1604 N3578
18	4	26	18.5	20	3	4.8	V6 1804 N3578
20	4	28	20.5	22	3	4.8	V6 2004 N3578
22	4	30	22.5	24	3	4.8	V6 2204 N3578
24	4	32	24.5	26	3	4.8	V6 2404 N3578
25	4	33	25.5	27	3	4.8	V6 2504 N3578
26	5	36	26.6	28	4	6	V6 2605 N3578
28	5	38	28.6	30	4	6	V6 2805 N3578
30	5	40	30.6	32	4	6	V6 3005 N3578
32	5	42	32.6	34	4	6	V6 3205 N3578
34	5	44	34.6	36	4	6	V6 3405 N3578
35	5	45	35.6	37	4	6	V6 3505 N3578
36	5	46	36.6	38	4	6	V6 3605 N3578
38	5	48	38.6	40	4	6	V6 3805 N3578
40	5	50	40.6	42	4	6	V6 4005 N3578
45	5	55	45.6	47	4	6	V6 4505 N3578
50	5	60	50.6	52	4	6	V6 5005 N3578
55	7	69	55.6	58	5	8.4	V6 5507 N3578
60	7	74	60.6	63	5	8.4	V6 6007 N3578
65	7	79	65.6	68	5	8.4	V6 6507 N3578
70	7	84	70.6	73	5	8.4	V6 7007 N3578
80	7	94	80.6	83	5	8.4	V6 8007 N3578
100	7	114	100.6	103	5	8.4	V6 A007 N3578
110	7	124	110.6	113	5	8.4	V6 B007 N3578

Further sizes on request.

Guide rings and tapes prevent metallic contact between pistons and cylinders or rods and glands where forces act perpendicular to the direction of movement.

These lateral forces (F) lead to a pressure distribution as shown in fig. 1. In practice, calculation based on the projected surface has proved to be a simple and more useful method. This means that the load carrying area (A) can be calculated from the length (H) multiplied by the diameter (D) (see fig. 2). The surface obtained is about 5 times larger than the assumed bearing area of fig. 1, so that lower specific loads must be reckoned with. In order to obtain the same values for lateral forces " F ", the specific load must be only $1/5$ of the max. force shown in fig. 1. The indicated permissible specific forces ($F_{perm.}$) take this into account, and the admissible specific pressure mentioned relates to the projected area as shown in fig. 2.

The values of the gaps (e) or shoulder diameters specified on drawings and Tables guarantee maximum efficiency of the guiding elements.

For operation together with a seal, however, the extrusion gap (e) specified for this particular seal is most important. Especially under high pressure the maximum gap behind the seal must be the basis for the determination of the piston-shoulder diameter between seal and guide tape (refer to chapter "Maximum gap allowance"). If the specified nominal measurements and tolerances are used to calculate the groove bottom diameter of the guide tapes, optimum guidance quality will be obtained and metallic contact prevented.

Figure:
H = Length of the guiding tape

Figure 1:


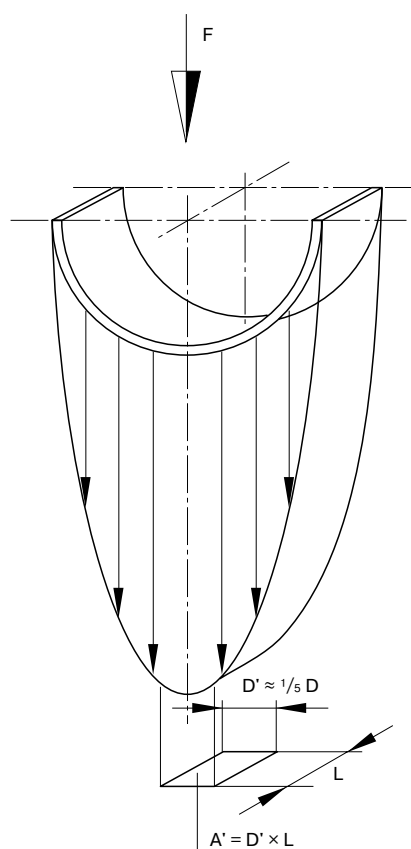


Figure 2:



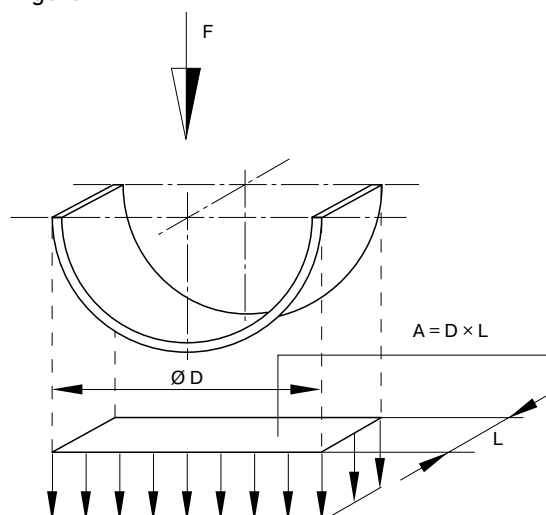

The F2 guiding tape made of PTFE compounds is intended specifically for use in pneumatic cylinders. The edges of the guiding tape have been adapted to the application conditions in pneumatics. The length of the cut-to-size guiding tape results in a suitable gap during installation which allows the system pressure to pass toward the seal, taking thermal expansions into account. The resulting gap is preferably created at a 45° angle in order to enable a minimum guidance function under load in the direction of the gap. Alternative gap versions (straight cut, stepped cut) are possible. The PTFE compound should be selected depending on temperature and the permissible permanent deformation.

- Due to application-optimized geometry and compounds suitable for use in oiled as well as in oil-free air (after initial lubrication on assembly).
- Vibration absorption effect.
- Very good emergency running properties in low-lube conditions.
- High load capacity (compressive strength), low wear and reduced friction due to special carbon additive in PTFE material.
- Also available as bulk material.
- Any desired nominal diameter available due to use of machining technique.
- Suitable for cylinder repairs.
- Ideally suited for large-diameters.
- Bulk material.
- Installation in closed housings.

Range of Application

Operating temperature	-100 °C to +200 °C
Sliding speed	≤ 10 m/s
Specific load q at 100 °C	2.5 N/mm²

Compounds

Polon® 033, PTFE + 25 % carbon.

Installation

The gap dimensions „e“ guarantee an optimum service life of the guiding tapes. For the seals, however, the gaps as mentioned on the respective catalogue pages are to be considered when it is essential to observe full working conditions („Range of Application“).


The inner diameter of the groove can be calculated by:

$$d = D - 2 S.$$

The gap „e“ between cylinder and piston is the maximum value and should not be exceeded.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

Calculation of the stretched length „U“

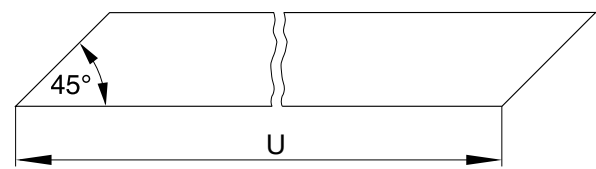

The length „U“ of the tape is to be calculated from the mean circumferential length less the clearance at the joint „k“. The k-values stated in the table are based on a temperature rise of 120 °C.

Calculation of the stretched length „U“

Cylinder Ø D	Piston	Stretched length U (mm) Tolerance (mm)	Gap k (mm)
≤ 45	$U = \pi \times (D - S) - k$	± 0.25	1.8
> 45		± 0.40	3.5
> 80		± 0.60	4.4
> 100		± 0.80	5.6
> 125		± 1	6.6
> 150		± 1.20	8.0
> 180		± 1.40	9.5
> 215		± 1.60	12.0
> 270		± 1.80	15.5
> 330		± 2	19.0

Selection of the guiding tape width L

The width H of the guiding tape has to be calculated for the worst possible conditions considering the maximum radial force. The specific load at the tape should in case of working temperatures of $\leq 100\text{ }^{\circ}\text{C}$ not exceed $Q = 2.5\text{ N/mm}^2$. The calculation of this figure is based on the area from the projection of the height L of the guiding tape multiplied by the piston diameter D. The maximum permissible radial force $F_{\text{perm.}}$ can be obtained with the formula:


$$F_{\text{perm.}} = L \times D \times Q_{\text{perm.}}$$


Specific data can be found in the nomograph.

Example:

A guiding tape diameter D of 70 mm and a guiding tape height of 8 mm result in a maximum permissible radial force of 1.4 kN or 1400 N.

Nomograph for calculating the specific load (Polon® TE033)

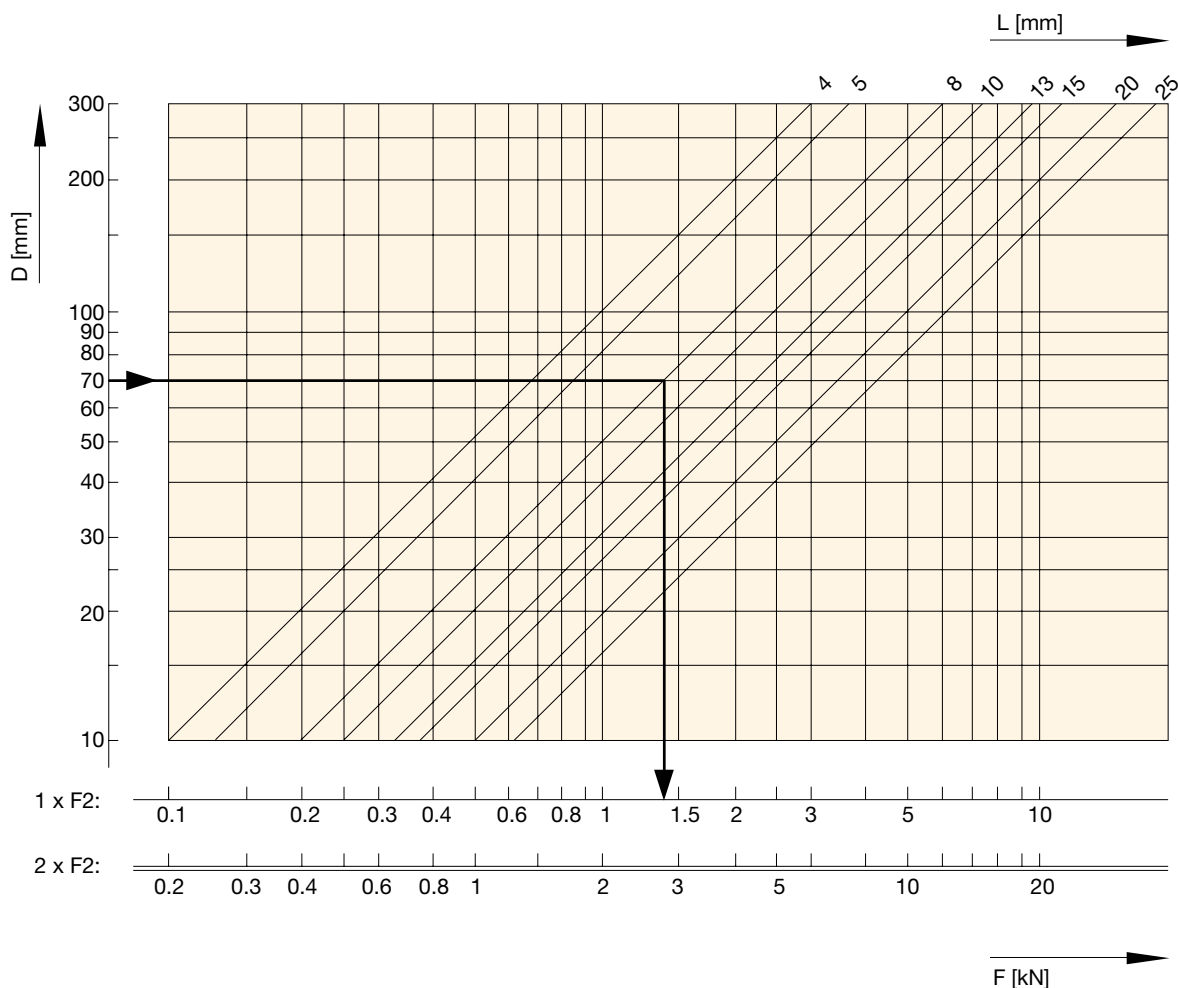


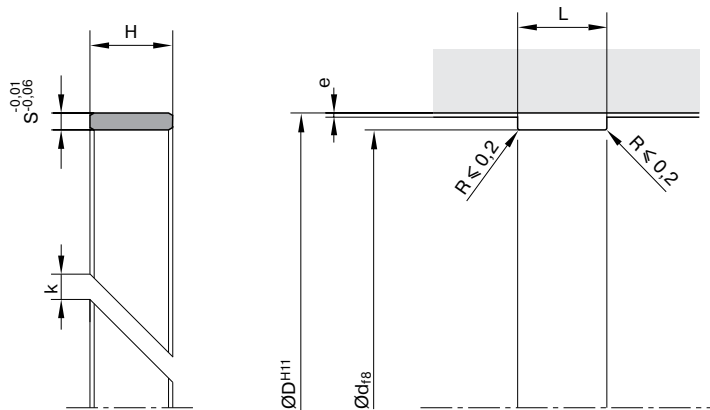

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Housing dimensions

Series no.	Guiding tape		Groove		
	S (mm)	L (mm)	H (mm)	d (mm)	e (mm)
15040	1.55	4 ^{+0.1}	3.9 ^{-0.15}	D - 3.1	0.25
15050	1.55	5 ^{+0.1}	4.9 ^{-0.15}	D - 3.1	0.25
15080	1.55	8 ^{+0.1}	7.8 ^{-0.20}	D - 3.1	0.25
15090	1.55	9 ^{+0.1}	8.8 ^{-0.20}	D - 3.1	0.25
15100	1.55	10 ^{+0.1}	9.8 ^{-0.20}	D - 3.1	0.25
15120	1.55	12 ^{+0.1}	11.8 ^{-0.20}	D - 3.1	0.25
15130	1.55	13 ^{+0.1}	12.8 ^{-0.20}	D - 3.1	0.35
15150	1.55	15 ^{+0.1}	14.8 ^{-0.20}	D - 3.1	0.35
15200	1.55	20 ^{+0.1}	19.5 ^{-0.40}	D - 3.1	0.35
15250	1.55	25 ^{+0.1}	24.5 ^{-0.40}	D - 3.1	0.35

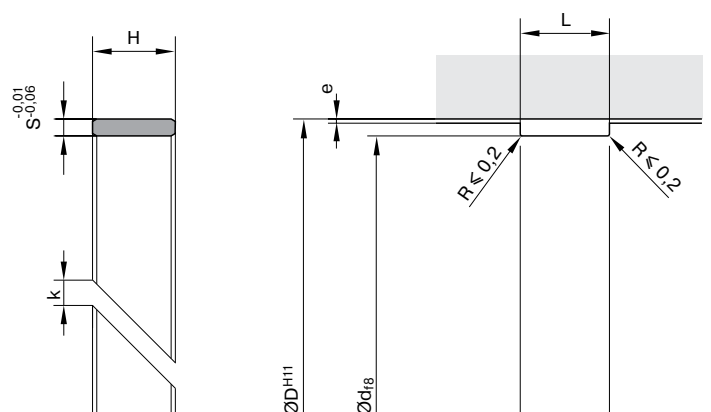


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

Ordering example

Mating surface	aluminium
Piston diameter	32 mm
Groove	1,5 × 4 mm

a)by the metre	F2 0000 033 15040 A (4 × 1.5)
F2	Profile
0000	-
033	Compound
15040	Series no.
A	Type of cut (45°)
b)cut to length	F2 0320 033 15040 A (4 × 1.5 × 94)
F2	Profile
0320	Piston diameter × 10
033	Compound
15040	Series no.
A	Type of cut (45°)

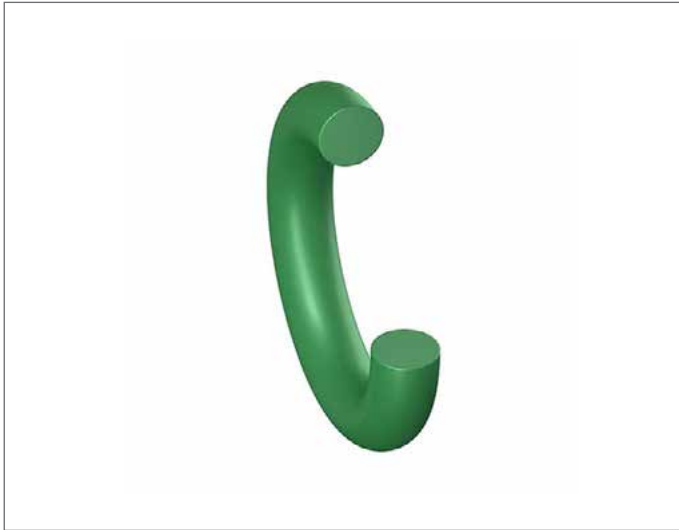

The Ultrathan® V1 O-ring is an alternative to conventional rubber elastomer O-rings. Due to the extrusion resistance of the polyurethane compounds, there is no need to use a back-up ring at higher or pulsating pressures. By eliminating the need for back-up rings the required width of the groove is reduced. Due to its high wear resistance, a polyurethane O-ring is also suitable for dynamic pneumatics applications. Very good results have been achieved, for instance, in pneumatic valves for sealing pilot and main control pistons.

- Robust seal profile for harshest operating conditions.
- Extreme wear resistance.
- Suitable for fully automatic installation.
- Insensitive to pressure peaks.
- High extrusion resistance.
- Excellent media resistance in case of suitable compound selection.
- Suitable compounds available for special requirements of the chemical process industry.
- Suitable compounds available for special requirements of the food processing industry.
- Installation in closed and undercut housings.
- Can be used in existing O-ring grooves.
- Additional sizes of machined products available on short notice.

Range of Application

The Ultrathan® O-rings are used when the physical properties of other compounds are insufficient.

Mainly for the sealing of cylinders, controls and valves.

Operating pressure	≤ 600 bar ¹⁾
Operating temperature	
Hydraulics	-35 °C to +100 °C
in water, HFA and HFB fluids	-35 °C to +50 °C
Pneumatics	-35 °C to +80 °C
Sliding speed	≤ 0.5 m/s
Media	Hydraulic oils based on mineral oil, HFA, and HFB fluids

¹⁾ With reduced extrusion gap and suitable cross-section.

Compounds

The compound Ultrathan® P5008 is a Parker standard material based on polyurethane with a Shore A hardness of approx. 93. Its main advantages in comparison with other polyurethane materials currently available on the market are the increased heat resistance and a better wear resistance. For low temperatures, the material Ultrathan® P5009 is recommended. For fluids containing water, we recommend our hydrolysis-resistant compounds P5000, P5001, P5012 and P5070.

Installation


Due to the higher modulus of the polyurethane compounds, the housings are slightly different from those of standard O-rings.

All edges should be rounded by at least $R = 0.1$.

In the case of special applications, please discuss your problems with our consultancy service.

Polyurethane O-rings show no tendency to twisting.

In case of special operating conditions (specific pressure loads, temperature, speed, use in water, HFA, HFB fluids etc.), please contact our consultancy service for a selection of the material and design best suiting your particular application requirements.

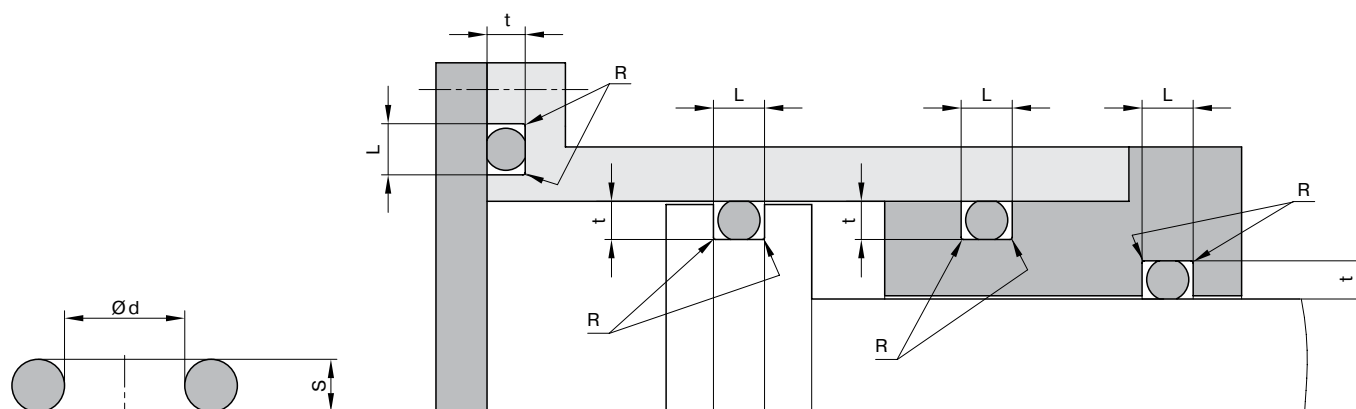


For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

O-ring glandsizes



S (mm)	R (mm)	Groove depth (radial) t (mm)*				Groove width (axial) L (mm) without anti-extru- sion ring
		static	dynamic hydraulic	dynamic pneumatic		
1.00	0.2	0.65 ^{±0.05}	0.75 ^{±0.02}	0.80 ^{±0.02}		1.4 ^{+0.2}
1.50	0.2	1.05 ^{±0.05}	1.20 ^{±0.02}	1.25 ^{±0.02}		2.0 ^{+0.2}
1.80	0.2	1.30 ^{±0.05}	1.45 ^{±0.02}	1.55 ^{±0.02}		2.4 ^{+0.2}
2.00	0.2	1.50 ^{±0.05}	1.65 ^{±0.02}	1.75 ^{±0.02}		2.7 ^{+0.2}
2.50	0.2	1.95 ^{±0.05}	2.10 ^{±0.02}	2.20 ^{±0.02}		3.4 ^{+0.2}
2.65	0.3	2.05 ^{±0.05}	2.25 ^{±0.02}	2.35 ^{±0.02}		3.6 ^{+0.2}
3.00	0.3	2.40 ^{±0.05}	2.55 ^{±0.02}	2.70 ^{±0.02}		4.2 ^{+0.2}
3.50	0.3	2.80 ^{±0.07}	3.05 ^{±0.05}	3.20 ^{±0.05}		4.8 ^{+0.2}
3.55	0.3	2.85 ^{±0.07}	3.10 ^{±0.05}	3.25 ^{±0.05}		4.8 ^{+0.2}
4.00	0.3	3.25 ^{±0.07}	3.50 ^{±0.05}	3.65 ^{±0.05}		5.4 ^{+0.2}
5.00	0.3	4.15 ^{±0.10}	4.45 ^{±0.05}	4.65 ^{±0.05}		6.8 ^{+0.2}
5.30	0.5	4.40 ^{±0.10}	4.70 ^{±0.05}	4.90 ^{±0.05}		7.2 ^{+0.2}
7.00	0.5	5.85 ^{±0.10}	6.25 ^{±0.05}	6.55 ^{±0.05}		9.6 ^{+0.2}

* Groove depth t = Back-up dimension t

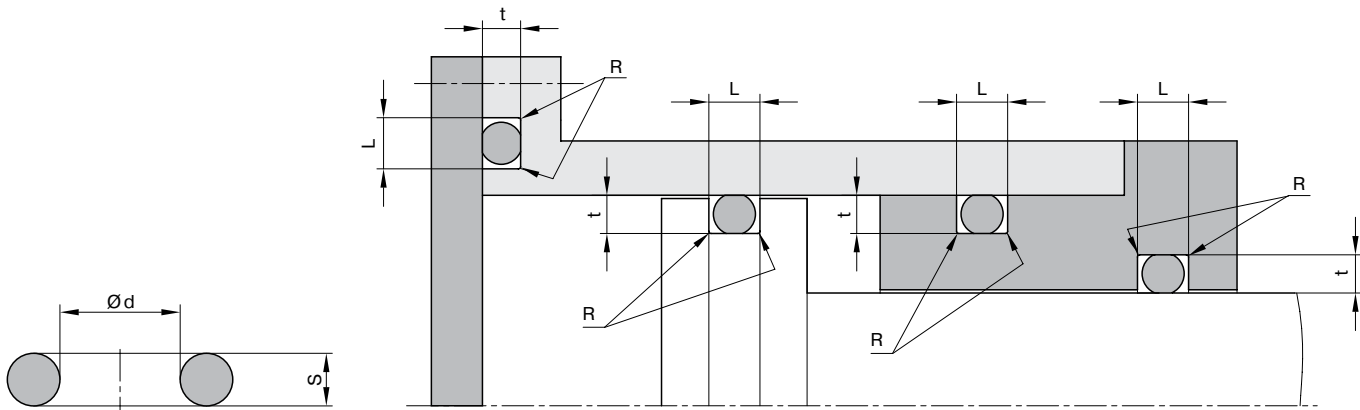

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.


Recommended interference

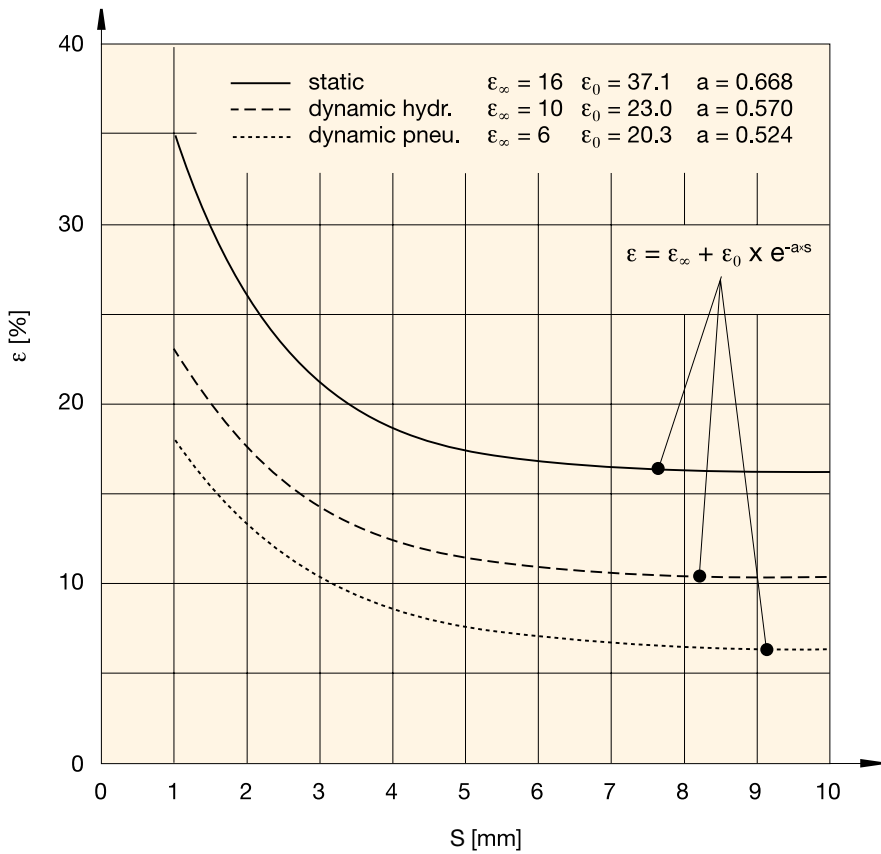

$$\epsilon [\text{mm}]: \epsilon = \frac{v}{100} \cdot 100 [\%]$$

$$t [\text{mm}]: t = S \cdot \left(1 - \frac{\epsilon}{100}\right)$$


* Groove depth t = Back-up dimension t

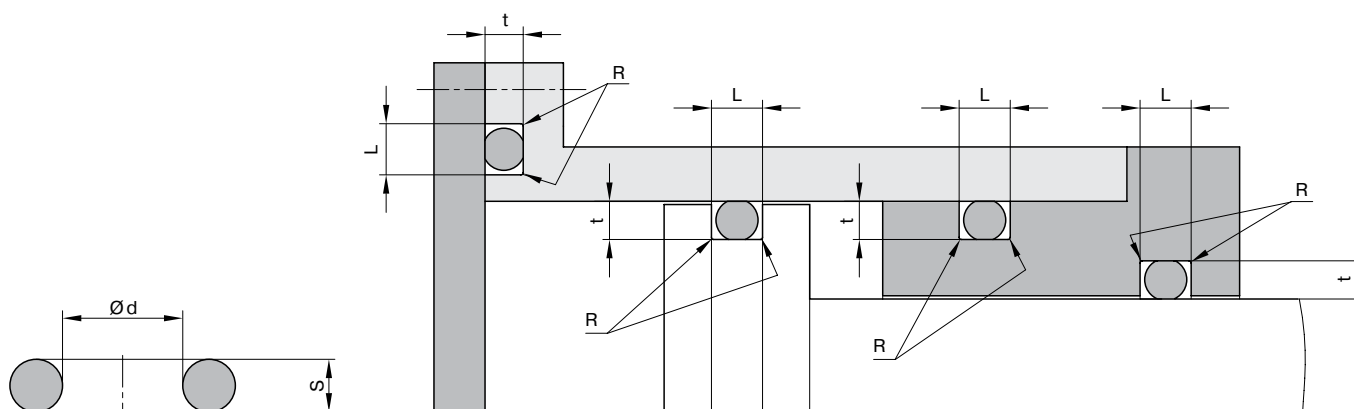

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	S	Order code	d	S	Order code
1.78	1.7	V1 0067 P5008	10	2.5	V1 1015 P5008
2.5	1.2	V1 0110 P5008	10	3	V1 1020 P5008
2.9	1.8	V1 0140 P5008	10.3	2.4	V1 1045 P5008
3	1.5	V1 0151 P5008	10.77	2.62	V1 1059 P5008
3.2	1.8	V1 0166 P5008	10.82	1.78	V1 1065 P5008
3.4	1.9	V1 0180 P5008	11	2	V1 1074 P5008
3.5	1.2	V1 0185 P5008	11	3	V1 1085 P5008
4	1.5	V1 0208 P5008	11.3	2.4	V1 1115 P5008
4	2	V1 0212 P5008	11.3	2.5	V1 1117 P5008
4.2	1.9	V1 0235 P5008	12	2	V1 1146 P5008
4.6	2	V1 0263 P5008	12	2.5	V1 1150 P5008
5	1.5	V1 0285 P5008	12	3	V1 1155 P5008
5	2	V1 0291 P5008	12.1	2.7	V1 1182 P5008
5	2.5	V1 0294 P5008	12.3	2.4	V1 1190 P5008
5.28	1.78	V1 0305 P5008	12.37	2.62	V1 1194 P5008
5.3	2.4	V1 0310 P5008	12.42	1.78	V1 1200 P5008
5.7	1.9	V1 0320 P5008	13	2	V1 1219 P5008
6	2	V1 0335 P5008	13	3	V1 1227 P5008
6.3	2.4	V1 0362 P5070	13.3	2.4	V1 1253 P5008
6.4	2	V1 0367 P5008	13.3	2.5	V1 1255 P5008
6.7	2	V1 0379 P5008	13.94	2.62	V1 1269 P5008
7	2	V1 0397 P5008	14	1.78	V1 1284 P5008
7	2.4	V1 0399 P5008	14	2	V1 1287 P5008
7.3	2.4	V1 0430 P5008	14	3	V1 1298 P5008
7.5	2	V1 0443 P5008	14.03	2.61	V1 1312 P5008
8	1.65	V1 0484 P5008	15	3	V1 1365 P5008
8	2	V1 0485 P5008	15.3	2.4	V1 1397 P5008
8	2.5	V1 0490 P5008	15.54	2.62	V1 1415 P5008
9	1.5	V1 0562 P5008	15.6	1.78	V1 1418 P5008
9	2	V1 0566 P5008	16	2	V1 1435 P5008
9.19	2.62	V1 0603 P5008	16.2	2	V1 1478 P5008
9.25	1.78	V1 0615 P5008	16.3	2.4	V1 1480 P5008
9.3	2.4	V1 0620 P5008	16.4	2	V1 1483 P5008
10	2	V1 1010 P5008	16.9	2.7	V1 1505 P5008


Further sizes on request.

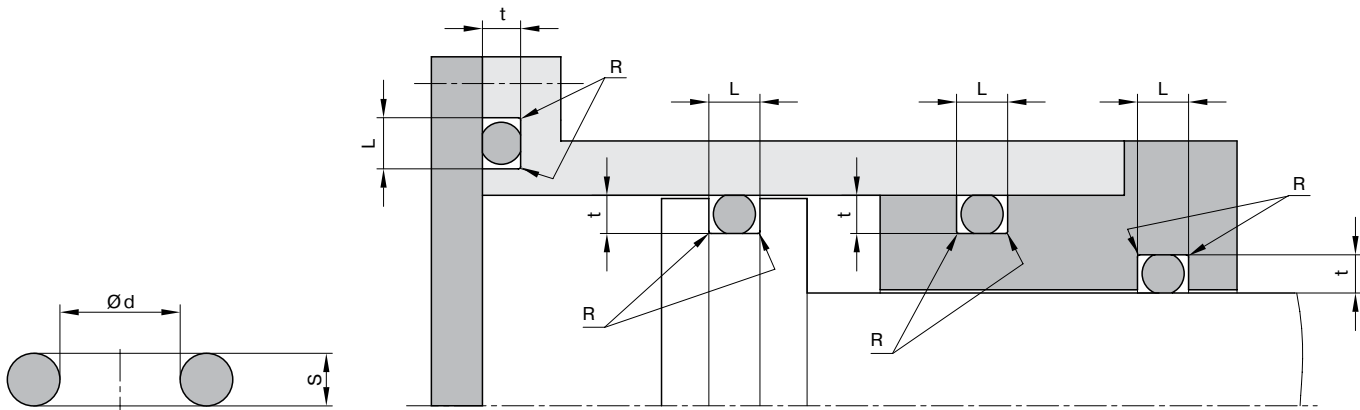

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	S	Order code	d	S	Order code
17	2	V1 1520 P5008	26.2	3	V1 2540 P5008
17	3	V1 1530 P5008	27	2.5	V1 2575 P5008
17.12	2.62	V1 1556 P5008	28	2	V1 2620 P5008
18	2	V1 1575 P5008	28	3	V1 2630 P5008
18.2	3	V1 1615 P5008	28	4	V1 2640 P5008
18.4	2.7	V1 1622 P5008	28.24	2.62	V1 2664 P5008
18.64	3.53	V1 1638 P5008	29.2	3	V1 2742 P5008
18.72	2.62	V1 1640 P5008	29.74	2.95	V1 2764 P5008
19	2	V1 1670 P5008	29.87	1.78	V1 2780 P5008
19	2.5	V1 1675 P5008	30	2	V1 3010 P5008
19.2	3	V1 1730 P5008	30.3	2.4	V1 3073 P5008
19.3	2.4	V1 1740 P5008	31.54	3.53	V1 3145 P5008
19.4	2.1	V1 1947 P5008	32	2	V1 3158 P5008
20	2	V1 2015 P5008	32	3	V1 3168 P5008
20	2.5	V1 2020 P5008	32	4	V1 3178 P5008
20	3	V1 2025 P5008	33	2	V1 3220 P5008
20.3	2.4	V1 2105 P5008	33	3.5	V1 3235 P5008
21	3.53	V1 2141 P5008	34.2	3	V1 3351 P5008
21.3	2.4	V1 2167 P5008	34.52	3.53	V1 3361 P5008
21.3	3.6	V1 2170 P5008	34.59	2.62	V1 3355 P5008
21.82	3.53	V1 2181 P5008	35	2	V1 3370 P5008
21.95	1.78	V1 2195 P5008	35	3	V1 3380 P5008
22	1.5	V1 2204 P5008	35.2	3	V1 3415 P5008
22	2	V1 2208 P5008	36	2	V1 3430 P5008
22.2	3	V1 2255 P5008	36	3.53	V1 3446 P5008
23	2.5	V1 2273 P5008	37.69	3.53	V1 3579 P5008
23	3	V1 2278 P5008	38	2	V1 3595 P5008
23.47	2.62	V1 2313 P5008	39	2	V1 3650 P5008
24	2	V1 2330 P5008	39.2	3	V1 3683 P5008
24	2.5	V1 2335 P5008	40	2	V1 4015 P5008
24.99	3.53	V1 2394 P5008	40.2	3	V1 4077 P5008
25	2	V1 2405 P5008	40.64	5.33	V1 4086 P5008
25.2	3	V1 2477 P5008	44	3	V1 4305 P5008
26	2	V1 2497 P5008	45	3	V1 4400 P5008

Further sizes on request.

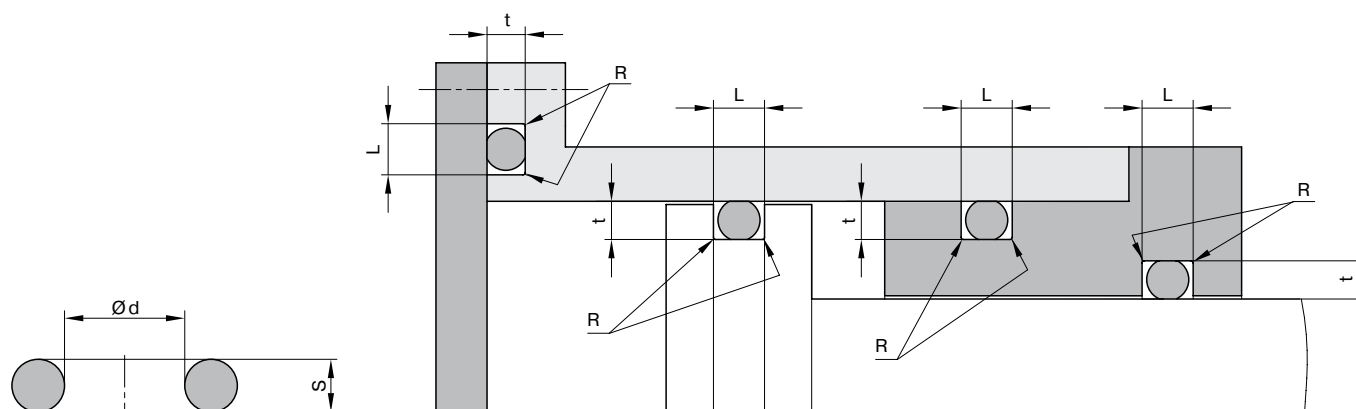

For surface finish, lead in chamfer and other installation dimensions see „General installation guidelines“.

d	S	Order code	d	S	Order code
46.99	5.33	V1 4514 P5008	100	5.33	V1 A043 P5008
48.9	2.62	V1 4645 P5008	100.97	5.33	V1 A089 P5008
50	2	V1 5015 P5008	110	5	V1 B030 P5008
50	3	V1 5025 P5008	110.49	5.33	V1 B066 P5008
50.16	5.33	V1 5066 P5008	112	6	V1 B117 P5008
50.2	3	V1 5069 P5008	114.6	5.7	V1 B216 P5008
53.34	5.33	V1 5274 P5008	116.84	6.99	V1 B297 P5030
54	3	V1 5300 P5008	120	4	V1 C030 P5008
55	4	V1 5360 P5008	120	5	V1 C040 P5008
56	3	V1 5410 P5008	124.6	5.7	V1 C307 P5008
56	6	V1 5422 P5008	129.54	5.33	V1 C480 P5008
59	3.53	V1 5580 P5008	130	5.33	V1 D039 P5008
59.69	5.33	V1 5604 P5008	134.6	5.7	V1 D185 P5008
60	3	V1 6020 P5008	135	5	V1 D205 P5008
60	4	V1 6030 P5008	151.77	6.99	V1 F085 P5030
60	5	V1 6040 P5008	152	5	V1 F123 P5008
64	3	V1 6285 P5008	158	5.7	V1 F292 P5008
65	5	V1 6370 P5008	178	5.7	V1 H240 P5008
66	5.33	V1 6443 P5018	202.57	6.99	V1 L073 P5008
68	3.53	V1 6551 P5008	225	5	V1 M135 P5008
69.21	5.33	V1 6655 P5008			
69.52	2.62	V1 6677 P5008			
70	3	V1 7020 P5008			
70	5	V1 7040 P5008			
75	3	V1 7340 P5008			
75.8	3.53	V1 7391 P5008			
80	3	V1 8020 P5008			
80	5	V1 8040 P5008			
82.14	3.53	V1 8168 P5008			
85	5	V1 8275 P5008			
89.2	5.7	V1 8485 P5008			
90	5	V1 9040 P5008			
91.4	5.33	V1 9113 P5008			
95	5	V1 9330 P5008			

Further sizes on request.



